

DrayTek

VigorAP 902

802.11ac Access Point



Your reliable networking solutions partner

User's Guide

V2.2

VigorAP 902

802.11ac Access Point

User's Guide

Version: 2.2

Firmware Version: V1.2.3.1

Date: December 1, 2017

Intellectual Property Rights (IPR) Information

| | |
|-------------------|---|
| Copyrights | © All rights reserved. This publication contains information that is protected by copyright. No part may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language without written permission from the copyright holders. |
| Trademarks | The following trademarks are used in this document: <ul style="list-style-type: none">● Microsoft is a registered trademark of Microsoft Corp.● Windows, Windows 95, 98, Me, NT, 2000, XP, Vista, 7 and Explorer are trademarks of Microsoft Corp.● Apple and Mac OS are registered trademarks of Apple Inc.● Other products may be trademarks or registered trademarks of their respective manufacturers. |

Safety Instructions and Approval

| | |
|-------------------------------------|--|
| Safety Instructions | <ul style="list-style-type: none">● Read the installation guide thoroughly before you set up the modem.● The modem is a complicated electronic unit that may be repaired only by authorized and qualified personnel. Do not try to open or repair the modem yourself.● Do not place the modem in a damp or humid place, e.g. a bathroom.● The modem should be used in a sheltered area, within a temperature range of +5 to +40 Celsius.● Do not expose the modem to direct sunlight or other heat sources. The housing and electronic components may be damaged by direct sunlight or heat sources.● Do not deploy the cable for LAN connection outdoor to prevent electronic shock hazards.● Keep the package out of reach of children.● When you want to dispose of the modem, please follow local regulations on conservation of the environment. |
| Warranty | We warrant to the original end user (purchaser) that the modem will be free from any defects in workmanship or materials for a period of one (1) year from the date of purchase from the dealer. Please keep your purchase receipt in a safe place as it serves as proof of date of purchase. During the warranty period, and upon proof of purchase, should the product have indications of failure due to faulty workmanship and/or materials, we will, at our discretion, repair or replace the defective products or components, without charge for either parts or labor, to whatever extent we deem necessary to store the product to proper operating condition. Any replacement will consist of a new or re-manufactured functionally equivalent product of equal value, and will be offered solely at our discretion. This warranty will not apply if the product is modified, misused, tampered with, damaged by an act of God, or subjected to abnormal working conditions. The warranty does not cover the bundled or licensed software of other vendors. Defects which do not significantly affect the usability of the product will not be covered by the warranty. We reserve the right to revise the manual and online documentation and to make changes from time to time in the contents hereof without obligation to notify any person of such revision or changes. |
| Be a Registered Owner | Web registration is preferred. You can register your Vigor modem via http://www.draytek.com . |
| Firmware & Tools Updates | Due to the continuous evolution of DrayTek technology, all modems will be regularly upgraded. Please consult the DrayTek web site for more information on newest firmware, tools and documents. http://www.draytek.com |

Table of Contents

1

| | |
|---|----------|
| Introduction | 1 |
| 1.1 Introduction | 1 |
| 1.2 LED Indicators and Connectors | 3 |
| 1.3 Hardware Installation | 5 |
| 1.3.1 Wired Connection for PC in LAN | 5 |
| 1.3.2 Wired Connection for Notebook in WLAN | 6 |
| 1.3.3 Wireless Connection..... | 7 |
| 1.3.4 PoE Connection..... | 8 |

2

| | |
|---|----------|
| Network Configuration..... | 9 |
| 2.1 Windows 7 IP Address Setup..... | 9 |
| 2.2 Windows 2000 IP Address Setup..... | 11 |
| 2.3 Windows XP IP Address Setup..... | 12 |
| 2.4 Windows Vista IP Address Setup..... | 13 |
| 2.5 Accessing to Web User Interface | 14 |
| 2.6 Changing Password | 15 |
| 2.7 Quick Start Wizard | 16 |
| 2.7.1 Configuring Wireless Settings – General..... | 16 |
| 2.7.2 Configuring 2.4GHz Wireless Settings Based on the Operation Mode..... | 17 |
| 2.7.3 Configuring 5GHz Wireless Settings Based on the Operation Mode..... | 24 |
| 2.7.4 Finishing the Wireless Settings Wizard | 28 |
| 2.8 Online Status | 29 |

3

| | |
|---|-----------|
| Advanced Configuration | 31 |
| 3.1 Operation Mode | 32 |
| 3.2 LAN | 33 |
| 3.2.1 General Setup..... | 33 |
| 3.2.2 Port Control..... | 36 |
| 3.2.3 Web Portal | 37 |
| 3.3 Central AP Management | 40 |
| 3.3.1 General Setup..... | 40 |
| 3.3.2 APM Log | 41 |
| 3.3.3 Function Support List..... | 41 |
| 3.3.4 Overload Management | 42 |
| 3.3.5 Status of Settings..... | 43 |
| 3.4 General Concepts for Wireless LAN (2.4GHz/5GHz) | 44 |

| | |
|---|-----|
| 3.5 Wireless LAN (2.4GHz) Settings for AP Mode..... | 46 |
| 3.5.1 General Setup..... | 47 |
| 3.5.2 Security..... | 49 |
| 3.5.3 Access Control..... | 52 |
| 3.5.4 WPS..... | 53 |
| 3.5.5 Advanced Setting..... | 54 |
| 3.5.6 AP Discovery..... | 57 |
| 3.5.7 WMM Configuration..... | 59 |
| 3.5.8 Bandwidth Management..... | 61 |
| 3.5.9 Airtime Fairness..... | 62 |
| 3.5.10 Station Control..... | 64 |
| 3.5.11 Roaming..... | 65 |
| 3.5.12 Band Steering..... | 67 |
| 3.5.13 Station List..... | 72 |
| 3.6 Wireless LAN (2.4GHz) Settings for Station-Infrastructure Mode..... | 74 |
| 3.6.1 General Setup..... | 74 |
| 3.6.2 Site Survey..... | 79 |
| 3.6.3 Statistics..... | 80 |
| 3.6.4 WPS (Wi-Fi Protected Setup)..... | 80 |
| 3.7 Wireless LAN Settings for AP Bridge-Point to Point/AP Bridge-Point to Multi-Point Mode .. | 82 |
| 3.7.1 General Setup..... | 82 |
| 3.7.2 Advanced Setting..... | 84 |
| 3.7.3 AP Discovery..... | 86 |
| 3.7.4 WDS AP Status..... | 88 |
| 3.8 Wireless LAN (2.4GHz) Settings for AP Bridge-WDS Mode..... | 89 |
| 3.8.1 General Setup..... | 89 |
| 3.8.2 Security..... | 93 |
| 3.8.3 Access Control..... | 96 |
| 3.8.4 WPS..... | 97 |
| 3.8.5 Advanced Setting..... | 98 |
| 3.8.6 AP Discovery..... | 100 |
| 3.8.7 WDS AP Status..... | 101 |
| 3.8.8 WMM Configuration..... | 102 |
| 3.8.9 Bandwidth Management..... | 104 |
| 3.8.10 Airtime Fairness..... | 105 |
| 3.8.11 Station Control..... | 107 |
| 3.8.12 Roaming..... | 108 |
| 3.8.13 Band Steering..... | 110 |
| 3.8.14 Station List..... | 115 |
| 3.9 Wireless LAN (2.4GHz) Settings for Universal Repeater Mode..... | 117 |
| 3.9.1 General Setup..... | 118 |
| 3.9.2 Security..... | 120 |
| 3.9.3 Access Control..... | 123 |
| 3.9.4 WPS..... | 124 |
| 3.9.5 Advanced Setting..... | 125 |
| 3.9.6 AP Discovery..... | 128 |
| 3.9.7 Universal Repeater..... | 130 |
| 3.9.8 WMM Configuration..... | 132 |
| 3.9.9 Bandwidth Management..... | 134 |
| 3.9.10 Airtime Fairness..... | 135 |
| 3.9.11 Station Control..... | 137 |
| 3.9.12 Roaming..... | 138 |
| 3.9.13 Band Steering..... | 140 |
| 3.9.14 Station List..... | 145 |
| 3.10 Wireless LAN (5GHz) Settings for AP Mode..... | 147 |

| | | |
|---------|---|-----|
| 3.10.1 | General Setup..... | 147 |
| 3.10.2 | Security..... | 149 |
| 3.10.3 | Access Control..... | 152 |
| 3.10.4 | WPS..... | 153 |
| 3.10.5 | Advanced Setting..... | 154 |
| 3.10.6 | AP Discovery..... | 156 |
| 3.10.7 | WMM Configuration..... | 158 |
| 3.10.8 | Bandwidth Management..... | 159 |
| 3.10.9 | Airtime Fairness..... | 160 |
| 3.10.10 | Station Control..... | 162 |
| 3.10.11 | Roaming..... | 163 |
| 3.10.12 | Station List..... | 165 |
| 3.11 | Wireless LAN (5GHz) Settings for AP Bridge-WDS Mode..... | 167 |
| 3.11.1 | General Setup..... | 167 |
| 3.11.2 | Security..... | 171 |
| 3.11.3 | Access Control..... | 174 |
| 3.11.4 | WPS..... | 175 |
| 3.11.5 | Advanced Setting..... | 176 |
| 3.11.6 | AP Discovery..... | 177 |
| 3.11.7 | WDS AP Status..... | 179 |
| 3.11.8 | WMM Configuration..... | 180 |
| 3.11.9 | Bandwidth Management..... | 182 |
| 3.11.10 | Airtime Fairness..... | 183 |
| 3.11.11 | Station Control..... | 185 |
| 3.11.12 | Roaming..... | 186 |
| 3.11.13 | Station List..... | 188 |
| 3.12 | Wireless LAN (5GHz) Settings for Universal Repeater Mode..... | 190 |
| 3.12.1 | General Setup..... | 190 |
| 3.12.2 | Security..... | 193 |
| 3.12.3 | Access Control..... | 196 |
| 3.12.4 | WPS..... | 197 |
| 3.12.5 | Advanced Setting..... | 198 |
| 3.12.6 | AP Discovery..... | 199 |
| 3.12.7 | Universal Repeater..... | 202 |
| 3.12.8 | WMM Configuration..... | 204 |
| 3.12.9 | Bandwidth Management..... | 206 |
| 3.12.10 | Airtime Fairness..... | 207 |
| 3.12.11 | Station Control..... | 209 |
| 3.12.12 | Roaming..... | 210 |
| 3.12.13 | Station List..... | 212 |
| 3.13 | RADIUS Setting..... | 214 |
| 3.13.1 | RADIUS Server..... | 214 |
| 3.13.2 | Certificate Management..... | 215 |
| 3.14 | Applications..... | 217 |
| 3.14.1 | Schedule..... | 217 |
| 3.14.2 | Apple iOS Keep Alive..... | 219 |
| 3.14.3 | Wi-Fi Auto On/Off..... | 220 |
| 3.14.4 | Temperature Sensor..... | 220 |
| 3.15 | Mobile Device Management..... | 223 |
| 3.15.1 | Detection..... | 223 |
| 3.15.2 | Policies..... | 224 |
| 3.15.3 | Statistics..... | 225 |
| 3.16 | System Maintenance..... | 225 |
| 3.16.1 | System Status..... | 226 |

| | |
|---------------------------------------|-----|
| 3.16.2 TR-069..... | 227 |
| 3.16.3 Administrator Password..... | 229 |
| 3.16.4 Configuration Backup | 230 |
| 3.16.5 Syslog/Mail Alert..... | 232 |
| 3.16.6 Time and Date | 233 |
| 3.16.7 SNMP..... | 234 |
| 3.16.8 Management..... | 235 |
| 3.16.9 Reboot System | 237 |
| 3.16.10 Firmware Upgrade | 237 |
| 3.17 Diagnostics..... | 238 |
| 3.17.1 System Log..... | 238 |
| 3.17.2 Speed Test | 238 |
| 3.17.3 Traffic Graph..... | 239 |
| 3.17.4 Data Flow Monitor..... | 239 |
| 3.17.5 WLAN (2.4GHz) Statistics | 240 |
| 3.17.6 WLAN (5GHz) Statistics | 241 |
| 3.17.7 Station Statistics | 242 |
| 3.17.8 Interference Monitor..... | 244 |
| 3.17.9 Station Airtime | 245 |
| 3.17.10 Station Traffic Graph..... | 246 |
| 3.17.11 Station Link Speed..... | 247 |
| 3.18 Support Area | 247 |

4

Applications.....249

| | |
|---|-----|
| 4.1 How to set different segments for different SSIDs in VigorAP 902..... | 249 |
| 4.2 How to use VigorAP in Universal Repeater Mode? | 253 |

5

Trouble Shooting.....261

| | |
|---|-----|
| 5.1 Checking If the Hardware Status Is OK or Not..... | 261 |
| 5.2 Checking If the Network Connection Settings on Your Computer Is OK or Not | 262 |
| 5.3 Pinging the Modem from Your Computer..... | 265 |
| 5.4 Backing to Factory Default Setting If Necessary | 266 |
| 5.5 Contacting DrayTek..... | 267 |

Index269

1

Introduction




Note: This is a generic International version of the user guide. Specification, compatibility and features vary by region. For specific user guides suitable for your region or product, please contact local distributor.

1.1 Introduction

Thank you for purchasing this VigorAP 902, the concurrent dual band wireless (2.4G/5G) access point offering high-speed data transmission. With this high cost-efficiency VigorAP 902, computers and wireless devices which are compatible with 802.11n/802.11a can connect to existing wired Ethernet network via this VigorAP 902, at the speed of 300Mbps.

Easy install procedures allows any computer users to setup a network environment in very short time - within minutes, even inexperienced users. Just follow the instructions given in this user manual, you can complete the setup procedure and release the power of this access point all by yourself!

VigorAP 902 also is a Power over Ethernet Powered Device which adopts the technology of PoE for offering power supply and transmitting data through the Ethernet cable.

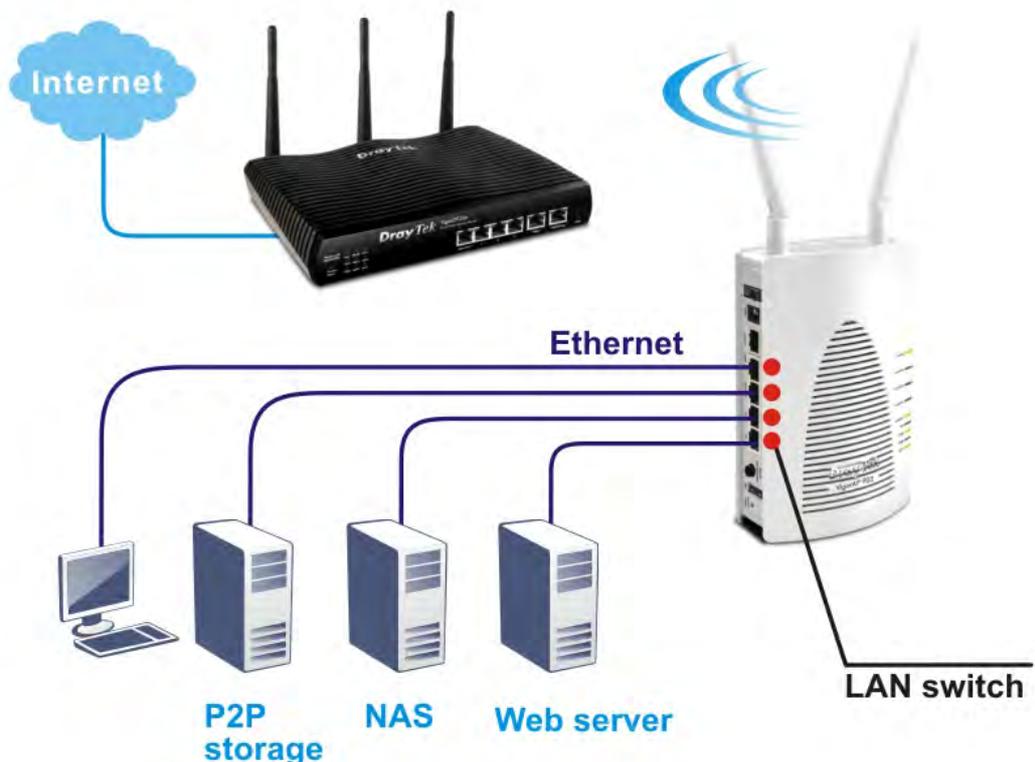

AP Management

The VigorAP 902 can operate in standalone mode for your office network or a classroom or a waiting room of some transportation terminals (e.g. ferry terminal, bus station, train station) or a clinic's waiting room ; connected to your LAN and offering you with wireless access. If your network requires several VigorAP 902 units, to centrally manage and monitor them individually as a group will be expected. DrayTek central wireless management (AP Management) lets control, efficiency, monitoring and security of your company-wide wireless access easier be managed. Inside the web user interface, we call “central wireless management” as Central AP Management which supports mobility, client monitoring / reporting and load-balancing to multiple APs. For central wireless management, you will need a Vigor2860 or Vigor2925 series router; there is no per-node licensing or subscription required. With the unified user interface of Vigor2860 Combo WAN series and Vigor2925 Triple WAN series, the multiple deployment of VigorAP 902 can be clear at the first sight. For multiple wireless clients to apply the AP Load Balancing to the multiple APs, AP management will manage wireless traffic with smooth flow and enhanced efficiency.

WLAN Setting

| SSID1 | SSID2 | SSID3 | SSID4 |
|--|--|-------------------------------|------------------------------------|
| 2.4G WLAN | | | |
| Active | <input checked="" type="radio"/> Enable | <input type="radio"/> Disable | |
| SSID | Draytek-LAN-A | LANA | <input type="checkbox"/> Hide SSID |
| VLAN | 0 | (0=untag) | |
| Isolate | <input type="checkbox"/> From Member | | |
| Security Settings | | | |
| WPA+WPA2+PSK | | | |
| Set up RADIUS Server if 802.1X is enabled. | | | |
| WPA | | | |
| WPA Algorithm | <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | | |
| Pass Phrase | ***** | | |
| Key Renewal Interval | 300 | Seconds | |
| PMK Cache Period | 15 | Minutes | |
| Pre-Authentication | <input type="checkbox"/> Enable <input checked="" type="checkbox"/> Disable | | |
| WEP | | | |
| Setup WEP Key if WEP is enabled. | | | |
| 802.1X WEP | <input type="checkbox"/> Enable <input checked="" type="checkbox"/> Disable | | |



Vigor Router



AP Status

| Index | Device Name | IP Address | SSID | Ch. | Encryption | Wl. Clients | Firmware | Password |
|-------|--------------|-----------------|-----------------|------------|------------------|-------------|----------|----------|
| 1 | AP800-1A2B3C | 192.168.254.253 | Draytek-pp | Auto(ch13) | 802.1x(WPA/WPA2) | 10/64 | 1.1.01 | Password |
| 2 | AP800-5F | 192.168.254.230 | Draytek-hw | ch13 | WPA2-AES | --- | 1.1.0 | Password |
| 3 | AP800-1F2A | 192.168.254.112 | Draytek-1234567 | ch6 | None | 2/64 | 1.1.0 | Password |

Note :
Green : Online Red : Offline Gray : Hidden SSID

1.2 LED Indicators and Connectors

Before you use the Vigor modem, please get acquainted with the LED indicators and connectors first.



| LED | Status | Explanation |
|-------------|----------|---|
| ACT | Off | The system is not ready or is failed. |
| | Blinking | The system is ready and can work normally. |
| USB | On | A USB device is connected and active. |
| | Blinking | The data is transmitting. |
| 2.4G | On | Wireless function is ready. |
| | Off | Wireless function is not ready. |
| | Blinking | Data is transmitting (sending/receiving). |
| 5G | On | Wireless function is ready. |
| | Off | Wireless function is not ready. |
| | Blinking | Data is transmitting (sending/receiving). |
| LAN A1 - A4 | On | A normal connection (rate with 100M/1000M) is through its corresponding port. |
| | Off | LAN is disconnected. |
| | Blinking | Data is transmitting (sending/receiving). |
| LAN B | On | A normal connection (rate with 100M/1000M) is through its corresponding port. |
| | Off | LAN is disconnected. |
| | Blinking | Data is transmitting (sending/receiving). |

| Interface | Description |
|---|---|
| 0/1 | Power switch. |
|  | PWR: Connector for a power adapter. |
| LAN B | Connector for xDSL / Cable modem (Giga level) or router. |
| LAN A4, A2, A1 A3 (PoE) | Connector for xDSL / Cable modem (Giga level) / computer or router. LAN A3 is used for PoE connection (for indoor use). |
|  WLAN ON/OFF WPS | Wireless band will be switched /changed according to the button pressed and released. For example, <ul style="list-style-type: none"> ● 2.4G (On) and 5G (On) – in default. ● 2.4G (Off) and 5G (On) – pressed and released the button once. ● 2.4G (On) and 5G (Off) – pressed and released the button twice. ● 2.4G (Off) and 5G (Off) – pressed and released the button three times. WPS - When WPS function is enabled by web user interface, press this button for more than 2 seconds. The router will wait for any wireless client connecting to it through WPS. |
| USB | Connector for a USB device (for temperature sensor). |
|  | Restore the default settings. Usage: Turn on VigorAP 902. Press the button and keep for more than 10 seconds. Then the device will restart with the factory default configuration. |

Note: For the sake of security, make the accessory kit away from children.

1.3 Hardware Installation


This section will guide you to install the VigorAP 902 through hardware connection and configure the device's settings through web browser.

Before starting to configure VigorAP 902, you have to connect your devices correctly.

1.3.1 Wired Connection for PC in LAN

1. Connect VigorAP 902 to ADSL modem, router, or switch/hub in your network through the **LAN A** port of the access point by Ethernet cable.
2. Connect a computer to other available LAN A port. Make sure the subnet IP address of the PC is the same as VigorAP 902 management IP, e.g., **192.168.1.X**.
3. Connect the A/C power adapter to the wall socket, and then connect it to the PWR connector of the access point.
4. Power on VigorAP 902.
5. Check all LEDs on the front panel. **ACT** LED should blink and **LAN** LEDs should be on if the access point is correctly connected to the ADSL modem or router.


(For the detailed information of LED status, please refer to section 1.2.)

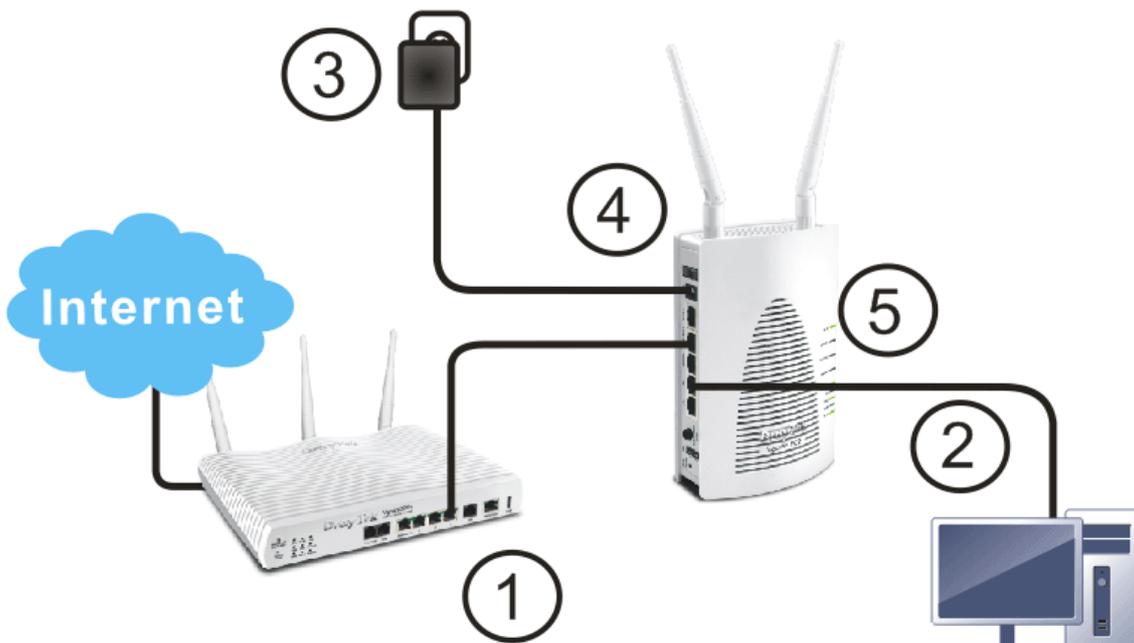

1.3.2 Wired Connection for Notebook in WLAN

1. Connect VigorAP 902 to ADSL modem or router in your network through the LAN A port of the access point by Ethernet cable.
2. Connect the A/C power adapter to the wall socket, and then connect it to the PWR connector of the access point.
3. Power on VigorAP 902.
4. Check all LEDs on the front panel. **ACT** LED should be steadily on, **LAN** LEDs should be on if the access point is correctly connected to the ADSL modem or router.

(For the detailed information of LED status, please refer to section 1.2.)

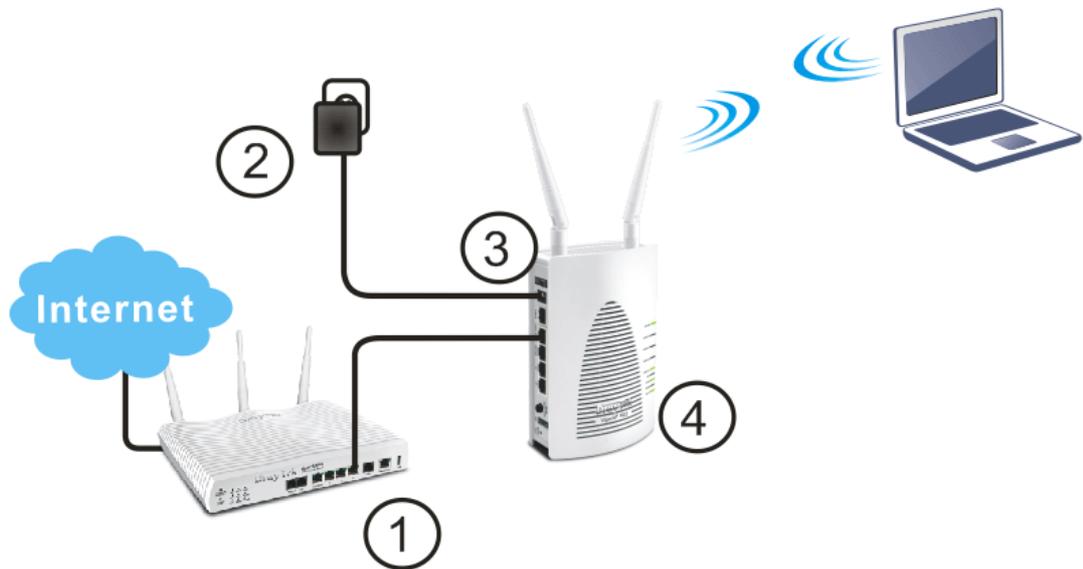

1.3.3 Wireless Connection

VigorAP 902 can access Internet via an ADSL modem, router, or switch/hub in your network through wireless connection.

1. Connect the A/C power adapter to the wall socket, and then connect it to the PWR connector of the access point.
2. Power on VigorAP 902.
3. Check all LEDs on the front panel. **ACT** LED should be steadily on.
4. Connect VigorAP 902 to ADSL modem or router via wireless network.


(For the detailed information of LED status, please refer to section 1.2.)



1.3.4 PoE Connection

VigorAP 902 can gain the power from the connected switch, e.g., VigorSwitch P2260. PoE (Power over Ethernet) can break the install limitation caused by the fixed power supply.

1. Connect VigorAP 902 to a switch in your network through the **LAN A3 (PoE)** port of the access point by Ethernet cable.
2. Connect a computer to VigorSwitch P2260. Make sure the subnet IP address of the PC is the same as VigorAP 902 management IP, e.g., **192.168.1.X**.
3. Power on VigorAP 902.
4. Check all LEDs on the front panel. **ACT** LED should be steadily on, **LAN** LEDs should be on if the access point is correctly connected to the ADSL modem, router or switch/hub.

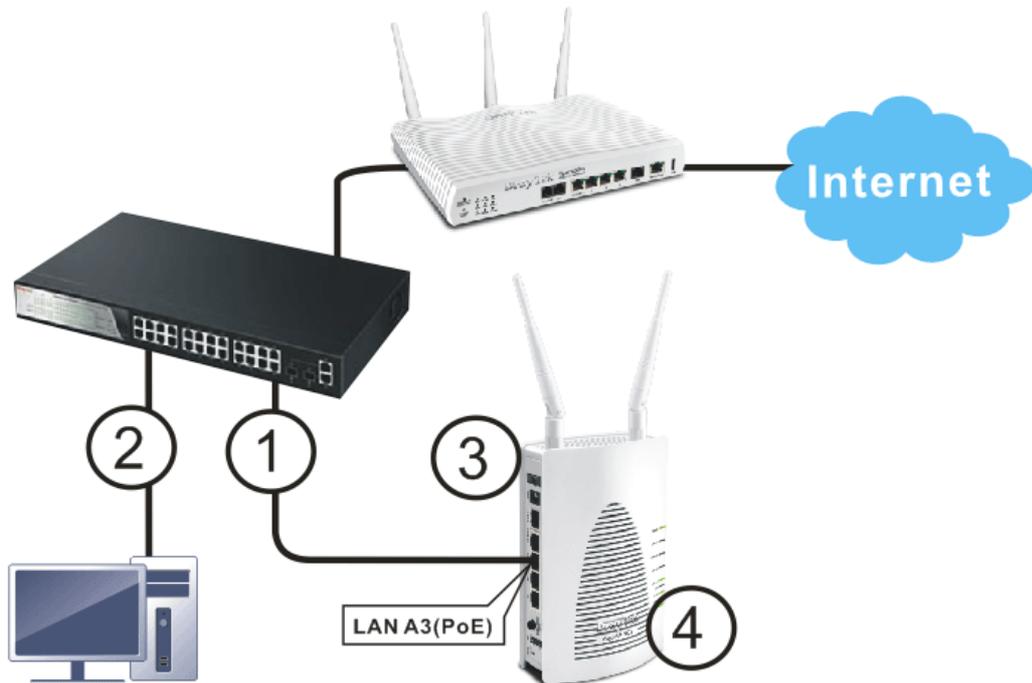

2

Network Configuration

After the network connection is built, the next step you should do is setup VigorAP 902 with proper network parameters, so it can work properly in your network environment.


Before you can connect to the access point and start configuration procedures, your computer must be able to get an IP address automatically (use dynamic IP address). If it's set to use static IP address, or you're unsure, please follow the following instructions to configure your computer to use dynamic IP address:

For the default IP address of this AP is set "192.168.1.2", we recommend you to use "192.168.1.X (except 2)" in the field of IP address on this section for your computer.
If the operating system of your computer is...


- Windows 7** - please go to section 2.1
- Windows 2000** - please go to section 2.2
- Windows XP** - please go to section 2.3
- Windows Vista** - please go to section 2.4

2.1 Windows 7 IP Address Setup


Click **Start** button (it should be located at lower-left corner of your computer), then click Control Panel. Double-click **Network and Internet**, and the following window will appear. Click **Network and Sharing Center**.

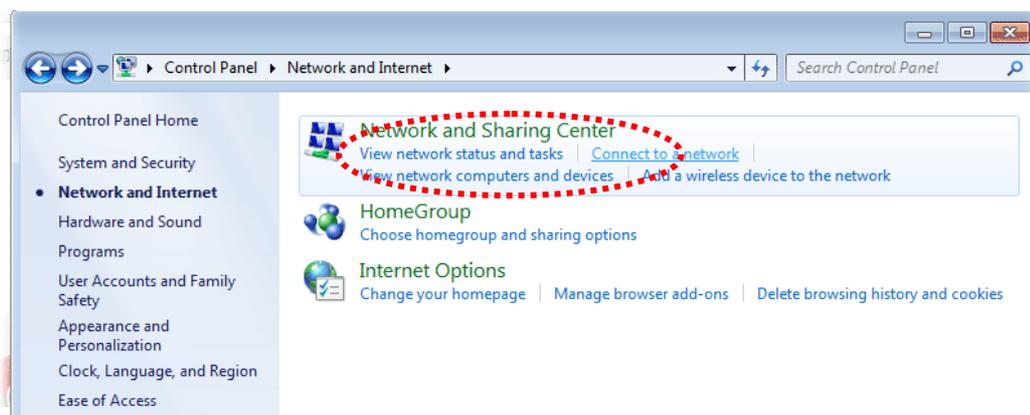

Next, click **Change adapter settings** and click **Local Area Connection**.

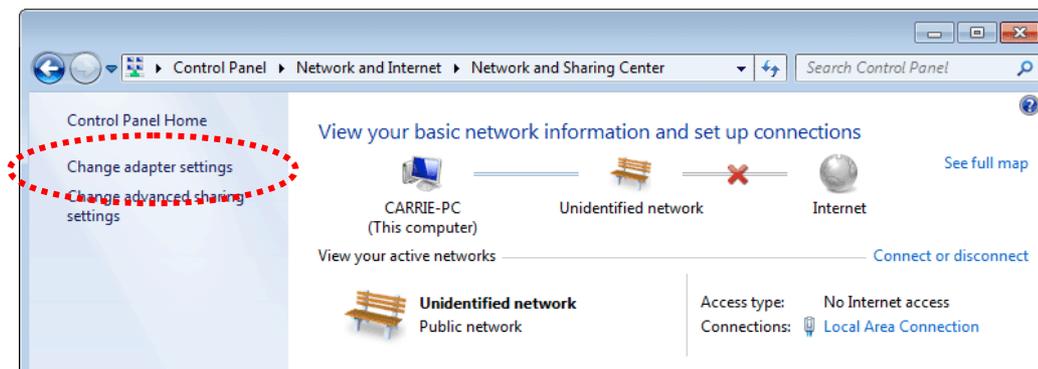


Then, select **Internet Protocol Version 4 (TCP/IPv4)** and click **Properties**.

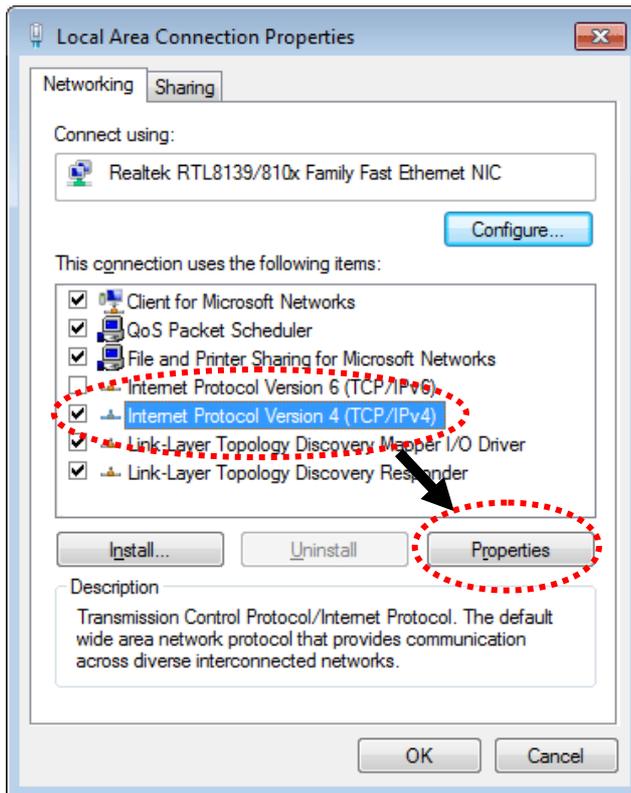

Under the General tab, click **Use the following IP address**. Then input the following settings in respective field and click **OK** when finish.


IP address: **192.168.1.9**

Subnet Mask: **255.255.255.0**

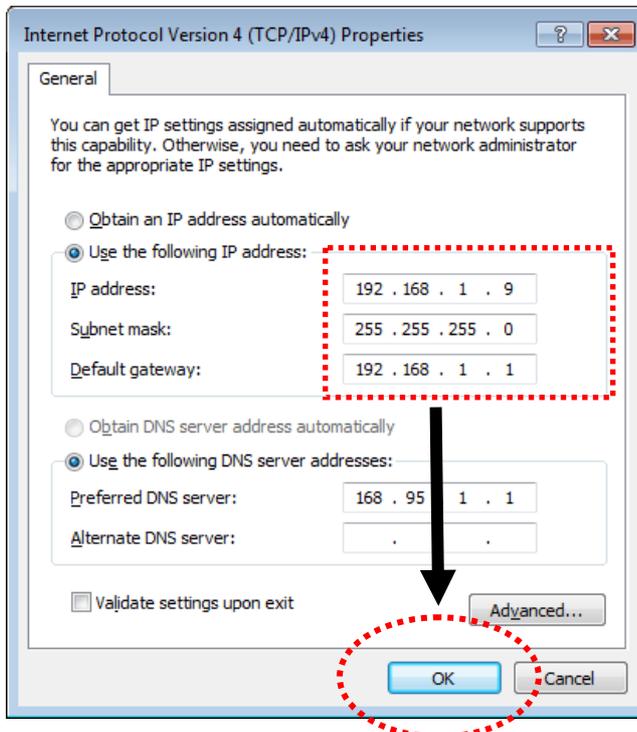

2.2 Windows 2000 IP Address Setup


Click **Start** button (it should be located at lower-left corner of your computer), then click control panel. Double-click **Network and Dial-up Connections** icon, double click **Local Area Connection**, and **Local Area Connection Properties** window will appear. Select **Internet Protocol (TCP/IP)**, then click **Properties**.

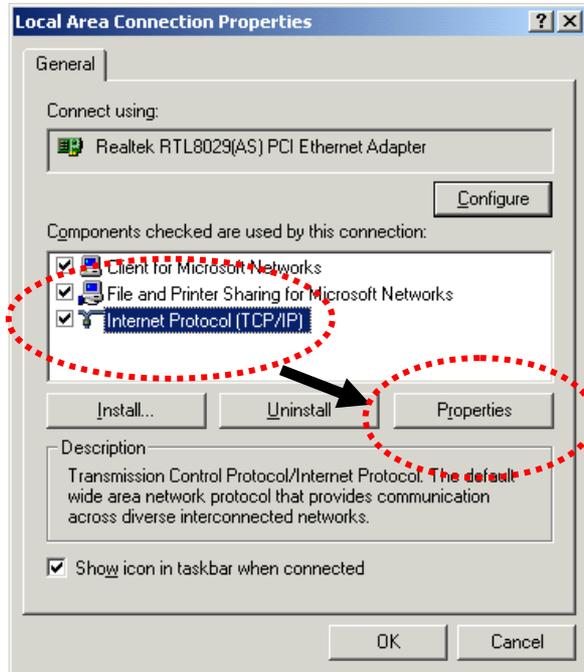

Select **Use the following IP address**, then input the following settings in respective field and click **OK** when finish.


IP address: **192.168.1.9**

Subnet Mask: **255.255.255.0**

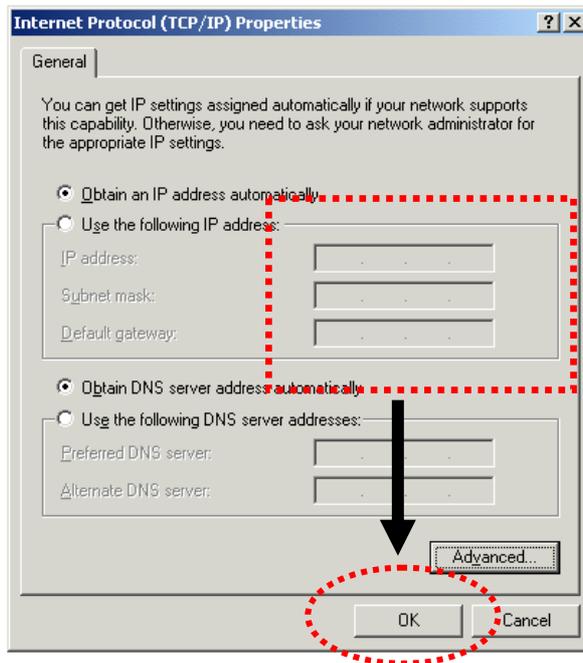

2.3 Windows XP IP Address Setup


Click **Start** button (it should be located at lower-left corner of your computer), then click control panel. Double-click **Network and Internet Connections** icon, click **Network Connections**, and then double-click **Local Area Connection, Local Area Connection Status** window will appear, and then click **Properties**.

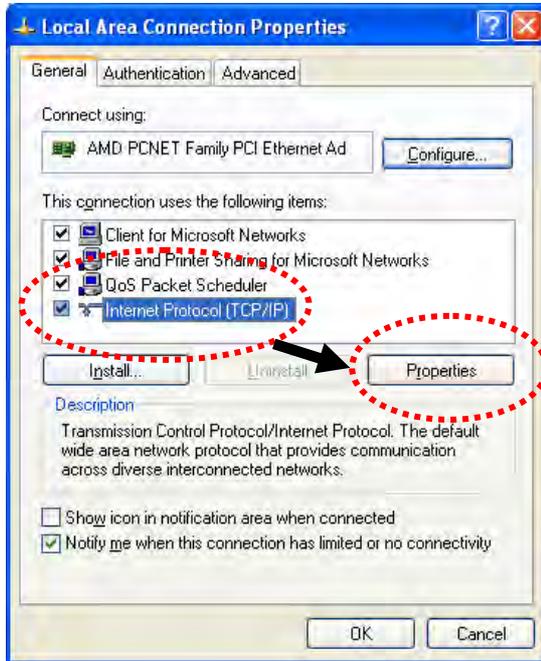

Select **Use the following IP address**, then input the following settings in respective field and click **OK** when finish:


IP address: **192.168.1.9**

Subnet Mask: **255.255.255.0**.

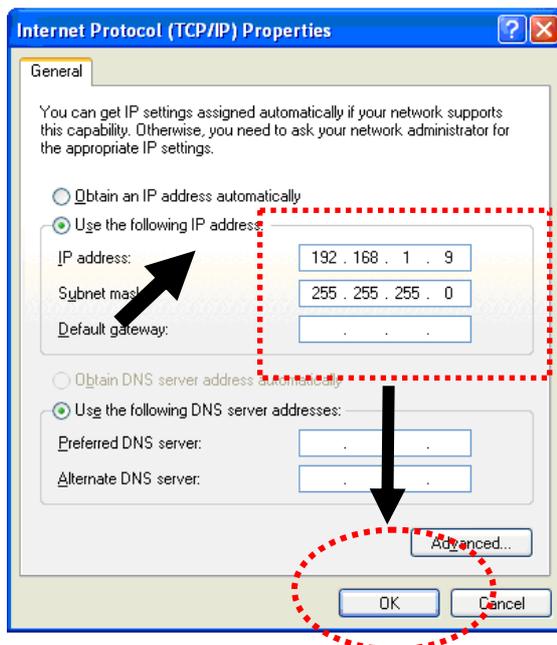

2.4 Windows Vista IP Address Setup


Click **Start** button (it should be located at lower-left corner of your computer), then click control panel. Click **View Network Status and Tasks**, then click **Manage Network Connections**. Right-click **Local Area Network**, then select **'Properties'**. **Local Area Connection Properties** window will appear, select **Internet Protocol Version 4 (TCP / IPv4)**, and then click **Properties**.

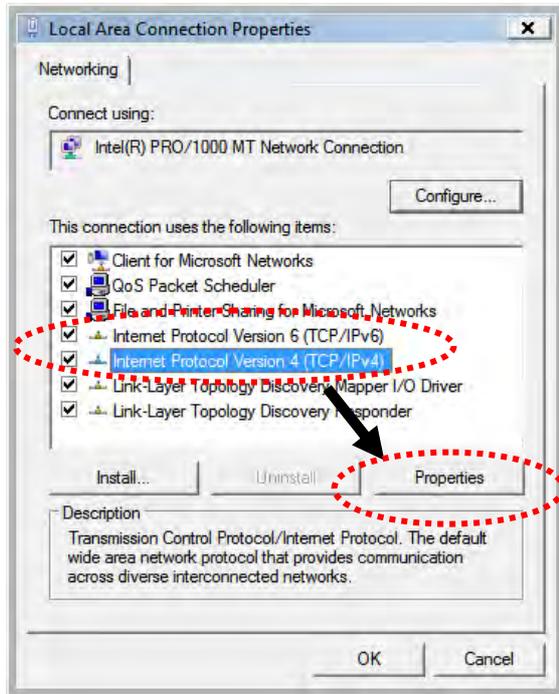

Select **Use the following IP address**, then input the following settings in respective field and click **OK** when finish:

IP address: **192.168.1.9**


Subnet Mask: **255.255.255.0**

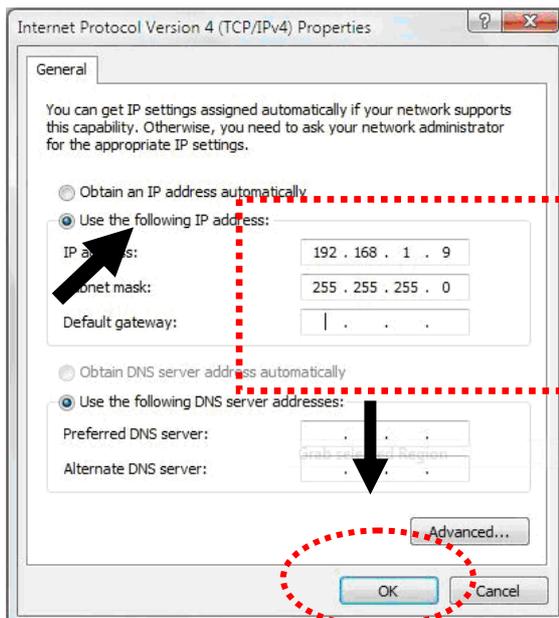

2.5 Accessing to Web User Interface

All functions and settings of this access point must be configured via web user interface. Please start your web browser (e.g., Firefox).

1. Make sure your PC connects to the VigorAP 902 correctly.
2. Open a web browser on your PC and type **http://192.168.1.2**. A pop-up window will open to ask for username and password. Please type “admin/admin” on Username/Password and click **OK**.

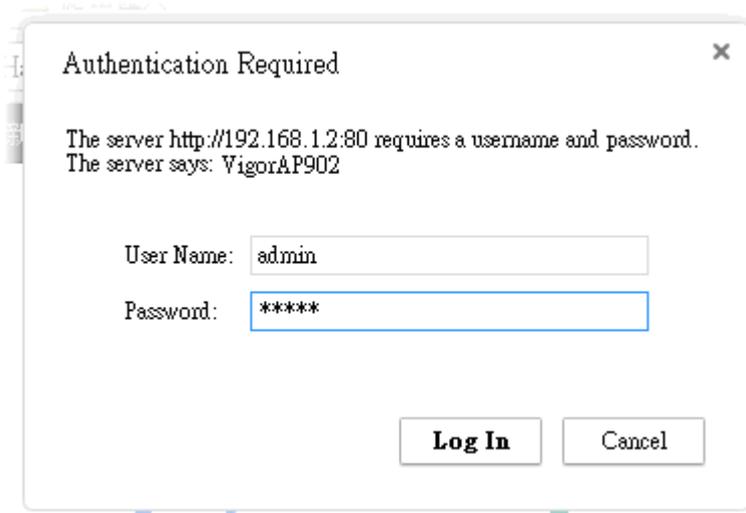

Note 1: You may either simply set up your computer to get IP dynamically from the router or set up the IP address of the computer to be in the same subnet as **the IP address of VigorAP 902**.

- If there is no DHCP server on the network, then VigorAP 902 will have an IP address of 192.168.1.2.
- If there is DHCP available on the network, then VigorAP 902 will receive it's IP address via the DHCP server.

3. The **Main Screen** will pop up.



Note: If you fail to access to the web configuration, please go to “Trouble Shooting” for detecting and solving your problem. For using the device properly, it is necessary for you to change the password of web configuration for security and adjust primary basic settings.

2.6 Changing Password

1. Please change the password for the original security of the modem.
2. Go to **System Maintenance** page and choose **Administration Password**.


System Maintenance >> Administration Password

Administrator Settings

| | |
|---|--|
| Account | <input type="text" value="admin"/> |
| Password | <input type="password" value="*****"/> |
| Confirm Password | <input type="password"/> |
| Password Strength: | <input type="radio"/> Weak <input type="radio"/> Medium <input type="radio"/> Strong |
| Strong password requirements: | |
| 1. Have at least one upper-case letter and one lower-case letter. | |
| 2. Including non-alphanumeric characters is a plus. | |

Note: Authorization Account can contain only a-z A-Z 0-9, ~ ` ! @ \$ % ^ * () _ + = { } [] | ; < > . ?
Authorization Password can contain only a-z A-Z 0-9, ~ ` ! @ # \$ % ^ & * () _ + = { } [] \ ;
< > . ? /

3. Enter the new login password on the field of **Password**. Then click **OK** to continue.
4. Now, the password has been changed. Next time, use the new password to access the Web User Interface for this modem.

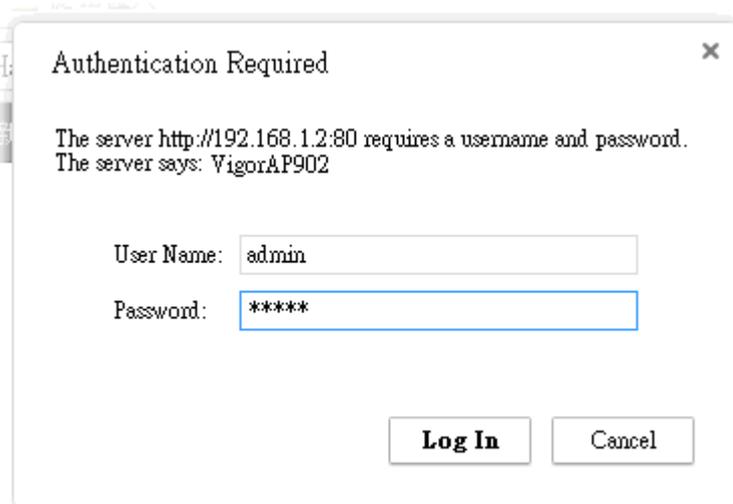

The image shows a dialog box titled "Authentication Required" with a close button (X) in the top right corner. The text inside the dialog reads: "The server http://192.168.1.2:80 requires a username and password. The server says: VigorAP902". Below this text are two input fields: "User Name:" with the value "admin" and "Password:" with the value "*****". At the bottom of the dialog are two buttons: "Log In" and "Cancel".

2.7 Quick Start Wizard

Quick Start Wizard will guide you to configure 2.4G wireless setting, 5G wireless setting and other corresponding settings for Vigor Access Point step by step.

2.7.1 Configuring Wireless Settings – General

This page displays general settings (enable/disable wireless LAN 2.4GHz/5GHz) for the operation mode selected.


Quick Start Wizard >> wiz wireless

Wireless LAN(2.4GHz)
Operation Mode : 
 VigorAP acts as a bridge between wireless devices and wired Ethernet network, and exchanges data between them.

Wireless LAN(5GHz)
Operation Mode: 
 VigorAP can act as a wireless repeater; it can be Station and AP at the same time.

Operation Mode
Wireless(2.4GHz)
Wireless(5GHz)

Available settings are explained as follows:
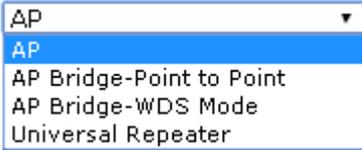
| Item | Description |
|------------------------------|---|
| Wireless LAN (2.4GHz) | Check the box to enable WLAN 2.4GHz for VigorAP. Operation Mode - There are four operation modes for wireless connection. Settings for each mode are different.  |
| Wireless LAN (5GHz) | Check the box to enable WLAN 5GHz for VigorAP. Operation Mode - There are three operation modes for wireless connection. Settings for each mode are different.  |

After finishing this web page configuration, please click **Next** to continue.

2.7.2 Configuring 2.4GHz Wireless Settings Based on the Operation Mode

In this page, the advanced settings will vary according to the operation mode chosen on 2.7.1.

Settings for AP

When you choose AP as the operation mode for wireless LAN (2.4GHz), you will need to configure the following page.

Quick Start Wizard >> Wireless LAN (2.4GHz)

| | |
|---|---|
| Channel : | <input type="text" value="2462MHz (Channel 11)"/> |
| Main SSID : | <input type="text" value="DrayTek-LAN-A"/> |
| Security Key: | <input type="text" value="*****"/> |
| <input checked="" type="checkbox"/> Enable Guest Wireless | |
| SSID: | <input type="text" value="DrayTek-LAN-B"/> |
| Security Key: | <input type="text" value="*****"/> |
| <input type="checkbox"/> Enable Bandwidth Limit | |
| <input type="checkbox"/> Enable Station Control | |

| | | |
|----------------|------------------|----------------|
| Operation Mode | Wireless(2.4GHz) | Wireless(5GHz) |
|----------------|------------------|----------------|

Available settings are explained as follows:

| Item | Description |
|-----------------------|---|
| Channel | <p>Means the channel frequency of the wireless LAN. The default channel is 6. You may switch channel if the selected channel is under serious interference. If you have no idea of choosing the frequency, please select AutoSelect to let system determine for you.</p> <div style="border: 1px solid gray; padding: 5px; margin-top: 10px;"> <input type="text" value="2462MHz (Channel 11)"/> <ul style="list-style-type: none"> AutoSelect 2412MHz (Channel 1) 2417MHz (Channel 2) 2422MHz (Channel 3) 2427MHz (Channel 4) 2432MHz (Channel 5) 2437MHz (Channel 6) 2442MHz (Channel 7) 2447MHz (Channel 8) 2452MHz (Channel 9) 2457MHz (Channel 10) <li style="background-color: #e0e0e0;">2462MHz (Channel 11) 2467MHz (Channel 12) 2472MHz (Channel 13) </div> |
| Main SSID | Set a name for VigorAP 902 to be identified. |
| Security Key | Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). |
| Enable Guest Wireless | <p>Check the box to enable the guest wireless setting.</p> <p>Such feature is especially useful for free Wi-Fi service. For</p> |

example, a coffee shop offers free Wi-Fi service for its guests for one hour every day.

SSID – Set a name for VigorAP 902 which can be identified and connected by wireless guest.

Security Key – Set **8~63** ASCII characters or **8~63** ASCII characters which can be used for logging into VigorAP 902 by wireless guest.

Enable Bandwidth Limit – Check the box to define the maximum speed of the data uploading/downloading which will be used for the guest connecting to Vigor device with the same SSID.

- **Upload Limit** – Scroll the radio button to choose the value you want.
- **Download Limit** – Scroll the radio button to choose the value you want.

Enable Station Control – Check the box to set the duration for the guest connecting /reconnecting to Vigor device.

- **Connection Time** – Scroll the radio button to choose the value you want.
- **Reconnection Time** – Scroll the radio button to choose the value you want.

Settings for AP Bridge-Point to Point

When you choose AP Bridge-Point to Point as the operation mode for wireless LAN (2.4GHz), you will need to configure the following page.

Quick Start Wizard >> Wireless LAN (2.4GHz)

AP Discovery:

Note: Enter the configuration of APs which VigorAP want to connect.

| |
|---|
| Phy Mode : HTMIX |
| Security : <input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES Key : <input type="text"/> |
| Peer Mac Address: <input type="text"/> : <input type="text"/> |

| | | |
|---|------------------|---|
| Operation Mode | Wireless(2.4GHz) | Wireless(5GHz) |
| <input type="button" value=" < Back"/> | | <input type="button" value=" Next >"/> |
| <input type="button" value=" Cancel"/> | | |

Available settings are explained as follows:

| Item | Description |
|---------------------|---|
| AP Discovery | Click this button to open the AP Discovery dialog. VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. |

| | |
|-------------------------|---|
| Phy Mode | Data will be transmitted via HTMIX mode. Each access point should be setup to the same Phy Mode for connecting with each other. |
| Security | Select WEP, TKIP or AES as the encryption algorithm. Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). |
| Peer MAC Address | Type the peer MAC address for the access point that VigorAP 902 connects to. |

Settings for AP Bridge-WDS

When you choose AP Bridge-WDS as the operation mode for wireless LAN (2.4GHz), you will need to configure the following page.

Quick Start Wizard >> Wireless LAN (2.4GHz)

AP Discovery:

Note: Enter the configuration of APs which VigorAP want to connect.
Remote AP should always set LAN-A MAC address to connect VigorAP WDS.

| |
|---|
| Phy Mode : HTMIX |
| Security : <input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES Key : <input type="text"/> |
| Peer Mac Address: <input type="text"/> : <input type="text"/> |

Main SSID :
 Security Key:

| | | |
|--|------------------|----------------|
| Operation Mode | Wireless(2.4GHz) | Wireless(5GHz) |
| <input type="button" value=" < Back"/> <input type="button" value=" Next >"/> <input type="button" value=" Cancel"/> | | |

Available settings are explained as follows:

| Item | Description |
|-------------------------|---|
| AP Discovery | Click this button to open the AP Discovery dialog. VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. |
| Phy Mode | Data will be transmitted via HTMIX mode. Each access point should be setup to the same Phy Mode for connecting with each other. |
| Security | Select WEP, TKIP or AES as the encryption algorithm. Type the key number if required. |
| Peer MAC Address | Type the peer MAC address for the access point that VigorAP 902 connects to. |
| Main SSID | Set a name for VigorAP 902 to be identified. |
| Security Key | Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). |

Settings for Universal Repeater

When you choose Universal Repeater as the operation mode for wireless LAN (2.4GHz), you will need to configure the following page.

Quick Start Wizard >> Wireless LAN (2.4GHz)

Universal Repeater Parameters

Please input the SSID you want to connect to :

| | |
|------------------------|------------------------|
| SSID | <input type="text"/> |
| MAC Address (Optional) | <input type="text"/> |
| Channel | 2462MHz (Channel 11) ▾ |
| Security Mode | WPA2/PSK ▾ |
| Encryption Type | AES ▾ |
| Security Key | <input type="text"/> |

Note: If Channel is modified, the Channel setting of AP would also be changed.

Use the same SSID and Security Key as above

SSID :

Security Key:

Enable Guest Wireless

SSID:

Security Key:

Enable Bandwidth Limit


Enable Station Control

Operation Mode:

Wireless(2.4GHz)
Wireless(5GHz)

Available settings are explained as follows:

| Item | Description |
|--------------------------------------|--|
| Universal Repeater Parameters | |
| AP Discovery | Click this button to open the AP Discovery dialog. VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. |
| SSID / MAC Address (Optional) | SSID means the identification of the wireless LAN. After choosing one of the AP from AP Discovery window and clicking OK , the settings (SSID and MAC Address) related to the selected AP will be displayed on these fields automatically. Later, VigorAP 902 will be allowed to access Internet through the selected AP, by using SSID displayed here. |
| Channel | Means the channel frequency of the wireless LAN. You may switch channel if the selected channel is under serious interference. |
| Security Mode | There are several modes provided for you to choose. Each mode will bring up different parameters (e.g., WEP keys, Pass Phrase) for you to configure. <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;"> <div style="display: flex; justify-content: space-between; align-items: center;"> WPA/PSK ▾ </div> <div style="margin-top: 5px;"> <p>Open</p> <p>Shared</p> <p style="background-color: #0070c0; color: white; padding: 2px;">WPA/PSK</p> <p>WPA2/PSK</p> </div> </div> |
| Encryption Type for | This option is available when Open/Shared is selected as |

| | |
|---|---|
| <p>Open/Shared</p> | <p>Security Mode.</p> <p>Choose None to disable the WEP Encryption. Data sent to the AP will not be encrypted. To enable WEP encryption for data transmission, please choose WEP.</p>  <p>WEP Keys - Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(~) except '#' and ','.</p>  |
| <p>Encryption Type for WPA/PSK and WPA2/PSK</p> | <p>This option is available when WPA/PSK or WPA2/PSK is selected as Security Mode.</p> <p>Select TKIP or AES as the algorithm for WPA.</p>  |
| <p>Security Key</p> | <p>Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). Such feature is available for WPA/PSK or WPA2/PSK mode.</p> |
| <p>Use the same SSID and Security Key as above</p> | <p>In general, under the network environment, same SSID and security key can be used for the host (wireless client) and the repeater (VigorAP 902) in Universal Repeater mode. Check it to use the same SSID and security key configured as above.</p> <p>SSID - SSID can be any text numbers or various special characters. For VigorAP 902 is set as "Repeater", the purpose of the device is to extend the Wi-Fi service. Therefore, the characters set here will be regarded as "main SSID". Other wireless client can receive the wireless signal from VigorAP 902 by using the SSID configured here.</p> <p>Security - Set 8~63 ASCII characters or 64 Hexadecimal digits which can be used for logging into VigorAP 902 by other wireless client.</p> |
| <p>Enable Guest Wireless</p> | <p>Check the box to enable the guest wireless setting.</p> <p>SSID – Set a name for VigorAP 902. Wireless guest is allowed to access into Internet via VigorAP 902 with the SSID configured here.</p> <p>Security Key – Set 8~63 ASCII characters or 64 Hexadecimal digits which can be used for logging into VigorAP 902 by</p> |

wireless guest.

Enable Bandwidth Limit – Check the box to define the maximum speed of the data uploading/downloading which will be used for the guest connecting to Vigor device with the same SSID.

- **Upload Limit** –Scroll the radio button to choose the value you want.
- **Download Limit** –Scroll the radio button to choose the value you want.

Enable Station Control – Check the box to set the duration for the guest connecting /reconnecting to Vigor device.

- **Connection Time** –Scroll the radio button to choose the value you want.
 - **Reconnection Time** –Scroll the radio button to choose the value you want.
-

After finishing this web page configuration, please click **Next** to continue.

2.7.3 Configuring 5GHz Wireless Settings Based on the Operation Mode

VigorAP 902 offers 5GHz wireless connection capability. You can setup 5GHz features in Quick Start Wizard first. Once the USB 5GHz wireless dongle connects to VigorAP 902, it can work immediately.

Settings for AP

After finished the configuration for wireless LAN (2.4GHz) and click **Next**, you will need to configure the following page if you choose AP as the operation mode for wireless LAN (5GHz).

Quick Start Wizard >> 5G Security

Channel :

Main SSID :

Security Key :

Enable Guest Wireless

SSID:

Security Key:

Enable Bandwidth Limit

Upload Limit Kbps

Download Limit Kbps

Enable Station Control

Connection Time Min(s)
0days 0hours 0mins

Reconnection Time Min(s)
0days 0hours 0mins

Operation Mode Wireless(2.4GHz) **Wireless(5GHz)**

Available settings are explained as follows:

| Item | Description |
|------------------------------|--|
| Channel | Means the channel of frequency of the wireless LAN. The default channel is 36. You may switch channel if the selected channel is under serious interference. |
| Main SSID | Set a name for VigorAP 902 to be identified. |
| Security Key | Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). |
| Enable Guest Wireless | <p>Check the box to enable the guest wireless setting.</p> <p>SSID – Set a name for VigorAP 902 which can be identified and connected by wireless guest.</p> <p>Security – Set 8~63 ASCII characters or 8~63 ASCII characters which can be used for logging into VigorAP 902 by wireless guest.</p> <p>Enable Bandwidth Limit –Check the box to define the maximum speed of the data uploading/downloading which will be used for the guest connecting to Vigor device with the same</p> |

| | |
|--|---|
| | <p>SSID.</p> <ul style="list-style-type: none"> ● Upload Limit –Scroll the radio button to choose the value you want. ● Download Limit –Scroll the radio button to choose the value you want. <p>Enable Station Control – Check the box to set the duration for the guest connecting /reconnecting to Vigor device.</p> <ul style="list-style-type: none"> ● Connection Time –Scroll the radio button to choose the value you want. ● Reconnection Time –Scroll the radio button to choose the value you want. |
|--|---|

After finishing this web page configuration, please click **Next** to continue.

Settings for AP Bridge-WDS

After finished the configuration for wireless LAN (2.4GHz) and click **Next**, you will need to configure the following page if you choose AP Bridge-WDS as the operation mode for wireless LAN (5GHz).

Quick Start Wizard >> Wireless LAN (5GHz)

AP Discovery:

Note: Enter the configuration of APs which VigorAP want to connect.
Remote AP should always set LAN-A MAC address to connect VigorAP WDS.

| |
|--|
| <p>Phy Mode : HTMIX</p> <hr/> <p>Security :</p> <p><input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES</p> <p>Key : <input type="text"/></p> <p>Peer Mac Address:</p> <p><input type="text"/> : <input type="text"/></p> |
|--|

Main SSID :
Security Key:

| | | |
|--|------------------|--|
| Operation Mode | Wireless(2.4GHz) | Wireless(5GHz) |
| <input style="border: none;" type="button" value=" < Back "/> | | <input style="border: none;" type="button" value=" Next > "/> |
| <input style="border: none;" type="button" value=" Cancel "/> | | |

Available settings are explained as follows:

| Item | Description |
|---------------------|---|
| AP Discovery | Click this button to open the AP Discovery dialog. VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. |
| Phy Mode | Data will be transmitted via HTMIX mode. Each access point should be setup to the same Phy Mode for connecting with each other. |
| Security | Select WEP, TKIP or AES as the encryption algorithm. Type the key number if required. |

| | |
|-------------------------|---|
| Peer MAC Address | Type the peer MAC address for the access point that VigorAP 902 connects to. |
| Main SSID | Set a name for VigorAP 902 to be identified. |
| Security Key | Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). |

After finishing this web page configuration, please click **Next** to continue.

Settings for Universal Repeater

After finished the configuration for wireless LAN (2.4GHz) and click **Next**, you will need to configure the following page if you choose Universal Repeater as the operation mode for wireless LAN (5GHz).

Quick Start Wizard >> Wireless LAN (5GHz)

Universal Repeater Parameters

Please input the SSID you want to connect to :

| | |
|------------------------|------------------------|
| SSID | <input type="text"/> |
| MAC Address (Optional) | <input type="text"/> |
| Channel | 5180MHz (Channel 36) ▾ |
| Security Mode | WPA2/PSK ▾ |
| Encryption Type | AES ▾ |
| Security Key | <input type="text"/> |

Note: If Channel is modified, the Channel setting of AP would also be changed.

Use the same SSID and Security Key as above

SSID :
 Security Key:

Enable Guest Wireless

SSID:
 Security Key:

Enable Bandwidth Limit

Upload Limit Kbps

Download Limit Kbps

Enable Station Control





Connection Time Min(s)

Reconnection Time Min(s)

Operation Mode: Wireless(2.4GHz) Wireless(5GHz)

Available settings are explained as follows:

| Item | Description |
|--------------------------------------|---|
| AP Discovery | Click this button to open the AP Discovery dialog. VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. |
| SSID / MAC Address (Optional) | SSID means the identification of the wireless LAN. After choosing one of the AP from AP Discovery window and clicking OK , the settings (SSID and MAC Address) related to the selected AP will be displayed on these fields automatically. Later, VigorAP 902 will be allowed to access Internet through the selected AP, by using SSID displayed here. |

| | |
|--|---|
| Channel | Means the channel of frequency of the wireless LAN. The default channel is 36. You may switch channel if the selected channel is under serious interference. |
| Security Mode | <p>There are several modes provided for you to choose. Each mode will bring up different parameters (e.g., WEP keys, Pass Phrase) for you to configure.</p>  |
| Encryption Type for Open/Shared | <p>This option is available when Open/Shared is selected as Security Mode.</p> <p>Choose None to disable the WEP Encryption. Data sent to the AP will not be encrypted. To enable WEP encryption for data transmission, please choose WEP.</p>  <p>WEP Keys - Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(~) except '#' and ','.</p>  |
| Encryption Type for WPA/PSK and WPA2/PSK | <p>This option is available when WPA/PSK or WPA2/PSK is selected as Security Mode.</p> <p>Select TKIP or AES as the algorithm for WPA.</p>  |
| Security Key | <p>Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). Such feature is available for WPA/PSK or WPA2/PSK mode.</p> |
| Use the same SSID and Security Key as Above | <p>In general, under the network environment, same SSID and security key can be used for the host (wireless client) and the repeater (VigorAP 902) in Universal Repeater mode. Check it to use the same SSID and security key configured as above.</p> <p>SSID - SSID can be any text numbers or various special characters. For VigorAP 902 is set as "Repeater", the purpose of the device is to extend the Wi-Fi service. Therefore, the characters set here will be regarded as "main SSID". Other</p> |

| | |
|-------------------------------------|--|
| | <p>wireless client can receive the wireless signal from VigorAP902 by using the SSID configured here.</p> <p>Security - Set 8~63 ASCII characters or 64 Hexadecimal digits which can be used for logging into VigorAP 902 by other wireless client.</p> |
| <p>Enable Guest Wireless</p> | <p>Check the box to enable the guest wireless setting.</p> <p>SSID – Set a name for VigorAP 902. Wireless guest is allowed to access into Internet via VigorAP 902 with the SSID configured here.</p> <p>Security Key – Set 8~63 ASCII characters or 64 Hexadecimal digits which can be used for logging into VigorAP 902 by wireless guest.</p> <p>Enable Bandwidth Limit – Check the box to define the maximum speed of the data uploading/downloading which will be used for the guest connecting to Vigor device with the same SSID.</p> <ul style="list-style-type: none"> ● Upload Limit –Scroll the radio button to choose the value you want. ● Download Limit –Scroll the radio button to choose the value you want. <p>Enable Station Control – Check the box to set the duration for the guest connecting /reconnecting to Vigor device.</p> <ul style="list-style-type: none"> ● Connection Time –Scroll the radio button to choose the value you want. ● Reconnection Time –Scroll the radio button to choose the value you want. |

After finishing this web page configuration, please click **Next** to continue.

2.7.4 Finishing the Wireless Settings Wizard

When you see this page, it means the wireless setting wizard is almost finished. Just click **Finish** to save the settings and complete the setting procedure.

Quick Start Wizard

Vigor Wizard Setup is now finished!

Basic settings for AP902 is completed.

Press Finish button to save and finish the wizard setup.
Note that the configuration process takes a few seconds to complete.

2.8 Online Status

The online status shows the LAN status, Station Link Status for such device.

Online Status

| System Status | | System Uptime: 0d 20:12:35 | | |
|---------------------------------------|----------------------|----------------------------|-------------------|-----------------|
| LAN-A Status | | | | |
| IP Address | TX Packets | RX Packets | TX Bytes | RX Bytes |
| 192.168.1.2 | 43384 | 12806 | 26236807 | 1079520 |
| LAN-B Status | | | | |
| IP Address | TX Packets | RX Packets | TX Bytes | RX Bytes |
| 192.168.2.2 | 17417 | 0 | 824790 | 0 |
| Universal Repeater 5GHz Status | | | | |
| IP | Gateway | SSID | Channel | |
| 192.168.2.10 | 192.168.2.1 | | 36 | |
| Remote Mac | Security Mode | TX Packets | RX Packets | |
| | | 3687318 | 95747 | |

Detailed explanation is shown below:

| Item | Description |
|-------------------|---|
| IP Address | Displays the IP address of the LAN interface. |
| TX Packets | Displays the total transmitted packets at the LAN interface. |
| RX Packets | Displays the total number of received packets at the LAN interface. |
| TX Bytes | Displays the total transmitted size at the LAN interface. |
| RX Bytes | Displays the total number of received size at the LAN interface. |

This page is left blank.

3

Advanced Configuration

This chapter will guide users to execute advanced (full) configuration. As for other examples of application, please refer to chapter 5.

1. Open a web browser on your PC and type **http://192.168.1.2**. The window will ask for typing username and password.
2. Please type “admin/admin” on Username/Password for administration operation.

Now, the **Main Screen** will appear. Be aware that “Admin mode” will be displayed on the bottom left side.

The screenshot displays the DrayTek VigorAP 902 web management interface. The top navigation bar includes the DrayTek logo and the device name 'VigorAP 902'. On the left, a sidebar menu lists various configuration options such as 'Quick Start Wizard', 'LAN', 'Wireless LAN (2.4GHz)', and 'System Maintenance'. The main content area is titled 'System Status' and provides detailed information about the device's hardware and software. It includes sections for 'System' (Memory Total, Memory Left, Cached Memory), 'Wireless LAN (2.4GHz)', and 'Wireless LAN (5GHz)'. Additionally, it shows network settings for 'LAN-A' and 'LAN-B', including MAC addresses, IP addresses, and IP masks. A red warning message at the bottom states: 'WARNING: Your AP is still set to default password. You should change it via System Maintenance menu.' The bottom left corner of the interface indicates 'Admin mode' and 'AP Mode'.

| System Status | |
|------------------|--------------------------------------|
| Model | : VigorAP902 |
| Device Name | : VigorAP902 |
| Firmware Version | : 1.2.3.1 |
| Build Date/Time | : r7791 Fri Nov 17 15:07:58 CST 2017 |
| System Uptime | : 0d 00:01:19 |
| Operation Mode | : AP |

| System | |
|---------------|-----------------------|
| Memory Total | : 62332 kB |
| Memory Left | : 19964 kB |
| Cached Memory | : 23984 kB / 62332 kB |

| Wireless LAN (2.4GHz) | |
|-----------------------|---------------------|
| MAC Address | : 00:1D:AA:3D:54:90 |
| SSID | : MK-902-mamie |
| Channel | : 11 |
| Driver Version | : 2.7.2.0 |

| LAN-A | |
|-------------|---------------------|
| MAC Address | : 00:1D:AA:3D:54:90 |
| IP Address | : 192.168.1.10 |
| IP Mask | : 255.255.255.0 |

| Wireless LAN (5GHz) | |
|---------------------|---------------------|
| MAC Address | : 00:1D:AA:3D:54:91 |
| SSID | : MK-902-mamie |
| Channel | : 100 |
| Driver Version | : 3.0.3.2 |

| LAN-B | |
|-------------|---------------------|
| MAC Address | : 00:1D:AA:3D:54:90 |
| IP Address | : 192.168.2.2 |
| IP Mask | : 255.255.255.0 |

WARNING: Your AP is still set to default password. You should change it via System Maintenance menu.

Admin mode
AP Mode

3.1 Operation Mode

This page provides several available modes for you to choose for different conditions. Click any one of them and click **OK**. The system will configure the required settings automatically.

Operation Mode Configuration

Wireless LAN (2.4GHz)

- AP :**
VigorAP acts as a bridge between wireless devices and wired Ethernet network, and exchanges data between them.
- Station-Infrastructure :**
Enable the Ethernet device as a wireless station and join a wireless network through an AP.
- AP Bridge-Point to Point :**
VigorAP will connect to another VigorAP which uses the same mode, and all wired Ethernet clients of both VigorAPs will be connected together.
- AP Bridge-Point to Multi-Point :**
VigorAP will connect to up to four VigorAPs which uses the same mode, and all wired Ethernet clients of every VigorAPs will be connected together.
- AP Bridge-WDS :**
VigorAP will connect to up to four VigorAPs which uses the same mode, and all wired Ethernet clients of every VigorAPs will be connected together.
This mode is still able to accept wireless clients.
- Universal Repeater :**
VigorAP can act as a wireless repeater; it can be Station and AP at the same time.

Wireless LAN (5GHz)

- AP :**
VigorAP acts as a bridge between wireless devices and wired Ethernet network, and exchanges data between them.
- AP Bridge-WDS :**
VigorAP will connect to up to four VigorAPs which uses the same mode, and all wired Ethernet clients of every VigorAPs will be connected together.
This mode is still able to accept wireless clients.
- Universal Repeater :**
VigorAP can act as a wireless repeater; it can be Station and AP at the same time.

OK

Available settings are explained as follows:

| Item | Description |
|---------------------------------------|--|
| Wireless LAN(2.4GHz) | |
| AP | This mode allows wireless clients to connect to access point and exchange data with the devices connected to the wired network. |
| Station-Infrastructure | Enable the Ethernet device such as TV and Game player connected to the VigorAP 902 to an access point. |
| AP Bridge-Point to Point | This mode can establish wireless connection with another VigorAP 902 using the same mode, and link the wired network which these two VigorAP 902s connected together. Only one access point can be connected in this mode. |
| AP Bridge-Point to Multi-Point | This mode can establish wireless connection with other VigorAP 902s using the same mode, and link the wired network which these VigorAP 902s connected together. Up to 4 access points can be connected in this mode. |

| | |
|---------------------------|---|
| AP Bridge-WDS | This mode is similar to AP Bridge to Multi-Point, but access point is not working in bridge-dedicated mode, and will be able to accept wireless clients while the access point is working as a wireless bridge. |
| Universal Repeater | This product can act as a wireless range extender that will help you to extend the networking wirelessly. The access point can act as Station and AP at the same time. It can use Station function to connect to a Root AP and use AP function to service all wireless clients within its coverage. |
| Wireless LAN(5GHz) | |
| AP | This mode allows wireless clients to connect to access point and exchange data with the devices connected to the wired network. |
| AP Bridge-WDS | This mode is similar to AP Bridge to Multi-Point, but access point is not working in bridge-dedicated mode, and will be able to accept wireless clients while the access point is working as a wireless bridge. |
| Universal Repeater | This product can act as a wireless range extender that will help you to extend the networking wirelessly. The access point can act as Station and AP at the same time. It can use Station function to connect to a Root AP and use AP function to service all wireless clients within its coverage. |

Note: The **Wireless LAN** settings will be changed according to the **Operation Mode** selected here. For the detailed information, please refer to the section of **Wireless LAN**.

3.2 LAN

Local Area Network (LAN) is a group of subnets regulated and ruled by modem.



3.2.1 General Setup

Click **LAN** to open the LAN settings page and choose **General Setup**.

Note: Such page will be changed according to the **Operation Mode** selected. The following screen is obtained by choosing **AP** as the operation mode.

LAN >> General Setup

Ethernet TCP / IP and DHCP Setup

| | |
|---|---|
| <p>LAN-A IP Network Configuration</p> <p><input checked="" type="checkbox"/> Enable DHCP Client</p> <p>IP Address: <input type="text" value="192.168.1.11"/></p> <p>Subnet Mask: <input type="text" value="255.255.255.0"/></p> <p>Default Gateway: <input type="text" value="192.168.1.1"/></p> <hr/> <p><input type="checkbox"/> Enable Management VLAN</p> <p>VLAN ID: <input type="text" value="0"/></p> | <p>DHCP Server Configuration</p> <p><input checked="" type="radio"/> Enable Server <input type="radio"/> Disable Server</p> <p><input type="radio"/> Relay Agent</p> <p>Start IP Address: <input type="text"/></p> <p>End IP Address: <input type="text"/></p> <p>Subnet Mask: <input type="text"/></p> <p>Default Gateway: <input type="text"/></p> <p>Lease Time: <input type="text" value="86400"/></p> <p>Primary DNS Server: <input type="text"/></p> <p>Secondary DNS Server: <input type="text"/></p> |
| <p>LAN-B IP Network Configuration</p> <p><input type="checkbox"/> Enable DHCP Client</p> <p>IP Address: <input type="text" value="192.168.2.2"/></p> <p>Subnet Mask: <input type="text" value="255.255.255.0"/></p> <hr/> <p><input type="checkbox"/> Enable Management VLAN</p> <p>VLAN ID: <input type="text" value="0"/></p> | <p>DHCP Server Configuration</p> <p><input type="radio"/> Enable Server <input checked="" type="radio"/> Disable Server</p> <p><input type="radio"/> Relay Agent</p> <p>Primary DNS Server: <input type="text"/></p> <p>Secondary DNS Server: <input type="text"/></p> <p>Trust DHCP Server IP for WLAN: <input type="text"/></p> |

Available settings are explained as follows:

| Item | Description |
|--|--|
| <p>LAN-A IP Network Configuration</p> | <p>Enable DHCP Client – When it is enabled, VigorAP 902 will be treated as a client and can be managed / controlled by AP Management server offered by Vigor router (e.g., Vigor2860).</p> <p>IP Address – Type in private IP address for connecting to a local private network (Default: 192.168.1.2).</p> <p>Subnet Mask – Type in an address code that determines the size of the network. (Default: 255.255.255.0/ 24)</p> <p>Default Gateway – In general, it is not really necessary to specify a gateway for VigorAP 902. However, if it is required, simply type an IP address as the gateway for VigorAP 902. It will be convenient for the access point to acquire more service (e.g., accessing NTP server) from Vigor router.</p> <p>Enable Management VLAN – VigorAP 902 supports tag-based VLAN for wireless clients accessing Vigor device. Only the clients with the specified VLAN ID can access into VigorAP 902.</p> <p>VLAN ID – Type the number as VLAN ID tagged on the transmitted packet. “0” means no VALN tag.</p> |
| <p>LAN-B IP Network Configuration</p> | <p>IP Address – Type in private IP address for connecting to a local private network (Default: 192.168.2.2).</p> <p>Subnet Mask – Type in an address code that determines the size of the network. (Default: 255.255.255.0/ 24)</p> <p>Enable Management VLAN – VigorAP 902 supports tag-based VLAN for wireless clients accessing Vigor device. Only the clients with the specified VLAN ID can access into VigorAP</p> |

| | |
|---|--|
| | <p>902.</p> <p>VLAN ID – Type the number as VLAN ID tagged on the transmitted packet. “0” means no VALN tag.</p> |
| <p>DHCP Server Configuration</p> | <p>DHCP stands for Dynamic Host Configuration Protocol. DHCP server can automatically dispatch related IP settings to any local user configured as a DHCP client.</p> <p>Enable Server - Enable Server lets the modem assign IP address to every host in the LAN.</p> <ul style="list-style-type: none"> ● Start IP Address - Enter a value of the IP address pool for the DHCP server to start with when issuing IP addresses. If the 1st IP address of your modem is 192.168.1.2, the starting IP address must be 192.168.1.3 or greater, but smaller than 192.168.1.254. ● End IP Address - Enter a value of the IP address pool for the DHCP server to end with when issuing IP addresses. ● Subnet Mask - Type in an address code that determines the size of the network. (Default: 255.255.255.0/ 24) ● Default Gateway - Enter a value of the gateway IP address for the DHCP server. ● Lease Time - It allows you to set the leased time for the specified PC. ● Primary DNS Server - You must specify a DNS server IP address here because your ISP should provide you with usually more than one DNS Server. If your ISP does not provide it, the modem will automatically apply default DNS Server IP address: 194.109.6.66 to this field. ● Secondary DNS Server - You can specify secondary DNS server IP address here because your ISP often provides you more than one DNS Server. If your ISP does not provide it, the modem will automatically apply default secondary DNS Server IP address: 194.98.0.1 to this field. <p>Relay Agent - Specify which subnet that DHCP server is located the relay agent should redirect the DHCP request to.</p> <ul style="list-style-type: none"> ● DHCP Server IP Address for Relay Agent - It is available when Enable Relay Agent is selected. Set the IP address of the DHCP server you are going to use so the Relay Agent can help to forward the DHCP request to the DHCP server. ● Primary DNS Server - You must specify a DNS server IP address here because your ISP should provide you with usually more than one DNS Server. If your ISP does not provide it, the modem will automatically apply default DNS Server IP address: 194.109.6.66 to this field. ● Secondary DNS Server - You can specify secondary DNS server IP address here because your ISP often provides you more than one DNS Server. If your ISP does not provide it, the modem will automatically apply default secondary DNS Server IP address: 194.98.0.1 to this field. |

Disable Server - Disable Server lets you manually or use other DHCP server to assign IP address to every host in the LAN.

- **Primary DNS Server** - You must specify a DNS server IP address here because your ISP should provide you with usually more than one DNS Server. If your ISP does not provide it, the modem will automatically apply default DNS Server IP address: 194.109.6.66 to this field.
- **Secondary DNS Server** - You can specify secondary DNS server IP address here because your ISP often provides you more than one DNS Server. If your ISP does not provide it, the modem will automatically apply default secondary DNS Server IP address: 194.98.0.1 to this field.
- **Trust DHCP Server IP for WLAN** –There is no right for such VigorAP to assign IP address for wireless LAN user. However, you can specify another valid DHCP server on other VigorAP to make the wireless LAN client obtaining the IP address from the designated DHCP server.

Specify a DHCP server in such field. All the IP addresses of the devices on LAN of VigorAP will be assigned via such specified server. It is used to avoid IP assignment interference due to multiple DHCP servers in one LAN.

After finishing this web page configuration, please click **OK** to save the settings.

3.2.2 Port Control

To avoid wrong connection due to the insertion of unsuitable Ethernet cable, the function of physical LAN ports can be disabled via web configuration.

LAN >> Port Control

Port Control

Enable Port Control

LAN-B LAN-A4 LAN-A3(PoE) LAN-A2 LAN-A1

Disable Port

OK Clear Cancel

Available settings are explained as follows:

| Item | Description |
|----------------------------|--|
| Enable Port Control | Check it to enable the port control. If it is enabled, you are allowed to disable the function of physical LAN port by checking the corresponding check box. |
| Disable Port | Choose and check the LAN port. |

After finishing this web page configuration, please click **OK** to save the settings.

3.2.3 Web Portal

This page allows you to configure a profile with specified URL for accessing into or display a message when a wireless/LAN user connects to Internet through this router. No matter what the purpose of the wireless/LAN client is, he/she will be forced into the URL configured here while trying to access into the Internet or the desired web page through this router. That is, a company which wants to have an advertisement for its products to users can specify the URL in this page to reach its goal.

LAN >> Web Portal

Web Portal Profile:

| Index | Enable | Comments | Login Mode | Applied Interface | |
|-------|--------------------------|----------|------------|-------------------|---------|
| 1 | <input type="checkbox"/> | | None | | Preview |
| 2 | <input type="checkbox"/> | | None | | Preview |
| 3 | <input type="checkbox"/> | | None | | Preview |
| 4 | <input type="checkbox"/> | | None | | Preview |

Note: The AP must connect to the Internet before webpage redirection will work.

OK Cancel

Each item is explained as follows:

| Item | Description |
|------------|--|
| Index | Display the number link which allows you to configure the profile. |
| Enable | Check the box to enable such profile. |
| Comments | Display the content (Disable, URL Redirect or Message) of the profile. |
| Login Mode | Display the login mode that a client uses to access into Internet. |
| Interface | Display the applied interfaces of the profile. |
| Preview | Open a preview window according to the configured settings. |

After finishing this web page configuration, please click **OK** to save the settings.

To configure the profile, click any index number link to open the following page.

LAN >> Web Portal

Web Portal

Enable

Comments

Welcome message

(Max 1024 characters)

Redirect Page

None

URL:

Authentication

None

Button Click

Applied Interfaces

LAN LAN (Works on universal repeater mode)

WLAN 2.4GHz SSID1 (MK-902-mamie)

SSID2 (DrayTek-LAN-B)

SSID3

SSID4

WLAN 5GHz SSID1 (MK-902-mamie)

SSID2 (DrayTek5G-LAN-B)

SSID3

SSID4

Note: The AP must connect to the Internet before webpage redirection will work.

Available settings are explained as follows:


| Item | Description |
|---------------------------|---|
| Enable | Check the box to enable this function. |
| Comments | Enter a brief comment to explain such web portal profile. |
| Welcome message | Enter words or sentences here. The message will be displayed on the screen for several seconds when the wireless users access into the web page through the router. <ul style="list-style-type: none"> ● Default – Click it to restore the default content. |
| Redirect Page | None - User can access into Internet directly. URL Redirect - Any user who wants to access into Internet through this router will be redirected to the URL specified here first. It is a useful method for the purpose of advertisement. For example, force the wireless user(s) in hotel to access into the web page that the hotel wants the user(s) to visit. |
| Authentication | None – User can access into Internet directly without authentication. Button Click – When a client tries to access into Internet, a welcome message page with a button named “Accept” will appear on the screen first. The client must click that button (Accept) and then he/she is allowed to access Internet. |
| Applied Interfaces | Check the box(es) representing different interfaces to be applied by such profile. <ul style="list-style-type: none"> ● LAN – If it is selected and Universal Repeater is specified as connection mode for such AP, both LAN client and WLAN client can access into Internet via web portal. Yet, |

| | |
|--|--|
| | <p>if AP mode is selected, only wireless LAN client shall access into Internet via web portal.</p> <ul style="list-style-type: none">● WLAN 2.4GHz/5GHz - The advantage is that each SSID (1/2/3/4) for wireless network can be applied with different web portal separately. |
|--|--|

After finishing all the settings here, please click **OK** to save the configuration.

3.3 Central AP Management

Such menu allows you to configure VigorAP device to be managed by Vigor router.

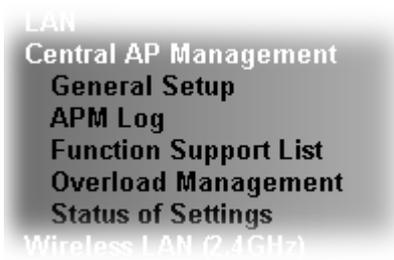

3.3.1 General Setup

Central AP Management >> General Setup

Vigor AP Managemet

- Enable AP Management
- Enable Auto Provision

OK

Cancel

Note: LAN-B cannot support APM feature.

Available settings are explained as follows:

| Item | Description |
|------------------------------|--|
| Enable AP Management | Check the box to enable the function of AP Management (APM). |
| Enable Auto Provision | VigorAP 902 can be controlled under Central AP Management in Vigor2860 series. When both Vigor2860 series and VigorAP 902 have such feature enabled, once VigorAP 902 is registered to Vigor2860 series, the WLAN profile pre-configured on Vigor2860 series will be applied to VigorAP 902 immediately. Thus, it is not necessary to configure VigorAP 902 separately. |

3.3.2 APM Log

This page will display log information related to wireless stations connected to VigorAP 902 and central AP management.

Such information also will be delivered to Vigor router (e.g., Vigor2860 or Vigor2925 series) and be shown on **Central AP Management>>Event Log** of Vigor router.

Central AP Management >> APM Log

APM Log Information

| [Clear](#) | [Refresh](#) | Line wrap |

```
ld 17:42:35 kernel: 20:02:af:a5:67:22 had associated successfully
ld 17:42:35 kernel: 20:02:af:a5:67:22 had disassociated.
```

3.3.3 Function Support List

Click the **Client** tab to list the AP management functions that the Access Points support under different firmware versions.

Central AP Management >> Function Support List

| Client | |
|-------------------------------|------------|
| Function Name | Model Name |
| | AP902 |
| | 1.1.5 |
| Register | |
| DHCP | √ |
| Static IP | √ |
| Profile | |
| 2.4GHz | √ |
| 5GHz | √ |
| AP Mode | √ |
| Repeater Mode | √ |
| Client Disable Auto Provision | √ |
| WLAN Enable/Disable | √ |
| Station List | |
| Station List | √ |

Note: DrayTek central wireless management (AP Management) lets control, efficiency, monitoring and security of your company-wide wireless access easier to be managed. Inside the web user interface, we call “central wireless management” as Central AP Management which supports mobility, client monitoring/reporting and load-balancing to multiple APs. For central wireless management, you will need a Vigor2860 or Vigor2925 series router; there is no per-node licensing or subscription required. With the unified user interface of Vigor2860 Combo WAN series and Vigor2925 Triple WAN series, the multiple deployment of VigorAP 902 can be clear at the first sight. For multiple wireless

clients, to apply the AP Load Balancing to the multiple APs will manage wireless traffic with smooth flow and enhanced efficiency.

3.3.4 Overload Management

Load Balance can help to distribute the traffic for all of the access points (e.g., VigorAP 902) registered to Vigor router. Thus, the bandwidth will not be occupied by certain access points.

However, traffic overload might be occurred if too many wireless stations connected to VigorAP 902 for data incoming and outgoing. Therefore, “Force Overload Disassociation” is required to terminate the network connection of the client’s station to release network traffic. When the function of “Force Overload Disassociation” in web user interface of Vigor router (e.g., Vigor2860 or Vigor2925 series) is enabled, wireless clients specified in **black list** of such web page will be disassociated to solve the problem of traffic overload.

The following web page is used to configure white list and black list for wireless stations.

Central AP Management >> Overload Management

Overload Management

MAC Address Filter of Force Overload Disassociation

| | Index | MAC Address | Comment |
|-------------------|-------|-------------|---------|
| White List | | | |
| Black List | | | |

Client's MAC Address : : : : : :

Apply to :

Comment :

Note: When force overload disassociation is enabled, clients in black list will be disassociated first. Clients in white list will not be disassociated.

Available settings are explained as follows:

| Item | Description |
|------------------------------|---|
| White List/Black List | Display the information (such as index number, MAC address and comment) for all of the members in White List/Black List. Wireless stations listed in Black List will be forcefully disconnected first when traffic overload occurs and “Force Overload Disassociation” is enabled. |
| Client’s MAC Address | Specify the MAC Address of the remote/local client. |
| Apply to | White List – MAC address listed inside Client’s MAC Address will be categorized as one of members in White List. Black List - MAC address listed inside Client’s MAC Address will be categorized as one of members in Black List. |

| | |
|---------------|---|
| Add | Add a new MAC address into the White List/Black List. |
| Delete | Delete the selected MAC address in the White List/Black List. |
| Edit | Edit the selected MAC address in the White List/Black List. |
| Cancel | Give up the configuration. |

3.3.5 Status of Settings

Load Balance can help to distribute the traffic for all of the access points (e.g., VigorAP 902s) registered to Vigor 2860 or Vigor2925 series. This web page displays the settings related to Load Balance for VigorAP 902. In which, By Station Number, By Traffic and Force Overload Disassociation indicate settings configured in Vigor 2860 or Vigor2925 series.

Central AP Management >> Status of Settings

| Function Name | Status | Value |
|----------------------------------|--------|-------|
| Load Balance | | |
| By Station Number | X | |
| Max WLAN(2.4GHz) Station Number | | 64 |
| Max WLAN(5GHz) Station Number | | 64 |
| By Traffic | X | |
| Upload Limit | | None |
| Download Limit | | None |
| Force Overload Disassociation | X | |
| Force Overload Disassociation By | | None |
| RSSI Threshold | | -50 |
| Rogue AP Detection | | |
| Rogue AP Detection | X | |

“X” means the function is not enabled or VigorAP 902 has not registered to any Vigor router yet.

Below shows a setting example for Load Balance settings configured in Vigor 2860 or Vigor2925 series.

Central AP Management >> Load Balance

Enable:

Mode: By Station Number
(Overload Detected By)
Maximum Station Number:
Wireless LAN (2.4GHz) (3-64)
Wireless LAN (5GHz) (3-64)

By Traffic
Upload Limit: bps (Default unit: K)
Download Limit: bps (Default unit: K)

Force Overload Disassociation:

Note: The maximum station number of Wireless LAN (2.4GHz) will be applied to both Wireless LAN (2.4GHz) and Wireless LAN (5GHz) if the firmware version of AP900 is less than or equal to 1.1.4.1.

3.4 General Concepts for Wireless LAN (2.4GHz/5GHz)

VigorAP 902 is a highly integrated wireless local area network (WLAN) for 5 GHz 802.11ac or 2.4/5 GHz 802.11n WLAN applications. It supports channel operations of 20/40 MHz at 2.4 GHz and 20/40/80 MHz at 5 GHz. VigorAP 902 can support data rates up to 867 MBps in 802.11ac 80 MHz channels.

Note: * The actual data throughput will vary according to the network conditions and environmental factors, including volume of network traffic, network overhead and building materials.

In an Infrastructure Mode of wireless network, VigorAP 902 plays a role as an Access Point (AP) connecting to lots of wireless clients or Stations (STA). All the STAs will share the same Internet connection via VigorAP 902. The **General Setup** will set up the information of this wireless network, including its SSID as identification, located channel etc.

Security Overview

WEP (Wired Equivalent Privacy) is a legacy method to encrypt each frame transmitted via radio using either a 64-bit or 128-bit key. Usually access point will preset a set of four keys and it will communicate with each station using only one out of the four keys.

WPA (Wi-Fi Protected Access), the most dominating security mechanism in industry, is separated into two categories: WPA-personal or called WPA Pre-Share Key (WPA/PSK), and WPA-Enterprise or called WPA/802.1x.

In WPA-Personal, a pre-defined key is used for encryption during data transmission. WPA applies Temporal Key Integrity Protocol (TKIP) for data encryption while WPA2 applies AES. The WPA-Enterprise combines not only encryption but also authentication.

Since WEP has been proved vulnerable, you may consider using WPA for the most secure connection. You should select the appropriate security mechanism according to your needs. No matter which security suite you select, they all will enhance the over-the-air data protection and /or privacy on your wireless network. The VigorAP 902 is very flexible and can support multiple secure connections with both WEP and WPA at the same time.

WPS Introduction

WPS (Wi-Fi Protected Setup) provides easy procedure to make network connection between wireless station and wireless access point (VigorAP 902) with the encryption of WPA and WPA2.




It is the simplest way to build connection between wireless network clients and VigorAP 902. Users do not need to select any encryption mode and type any long encryption passphrase to setup a wireless client every time. He/she only needs to press a button on wireless client, and WPS will connect for client and VigorAP 902 automatically.


Note: Such function is available for the wireless station with WPS supported.

There are two methods to do network connection through WPS between AP and Stations: pressing the *Start PBC* button or using *PIN Code*.

On the side of VigorAP 902 series which served as an AP, press **WPS** button once on the front panel of VigorAP 902 or click **Start PBC** on web configuration interface. On the side of a station with network card installed, press **Start PBC** button of network card.

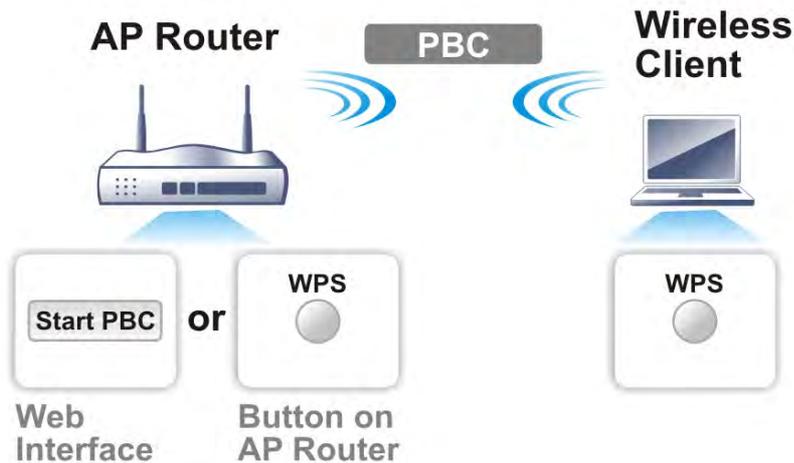


If you want to use PIN code, you have to know the PIN code specified in wireless client. Then provide the PIN code of the wireless client you wish to connect to the VigorAP 902.

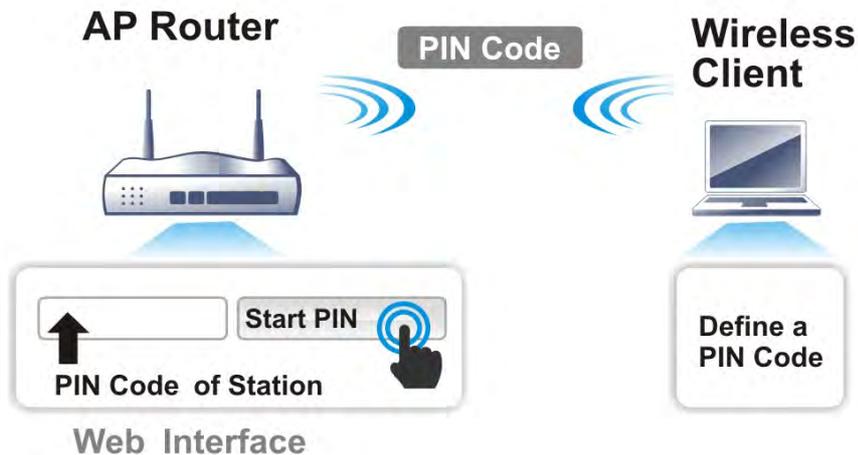

3.5 Wireless LAN (2.4GHz) Settings for AP Mode

When you choose **AP** as the operation mode, the Wireless LAN menu items will include General Setup, Security, Access Control, WPS, Advanced Setting, AP Discovery, WMM Configuration, Bandwidth Management, Airtime Fairness, Station Control, Roaming, Band Steering and Station List.

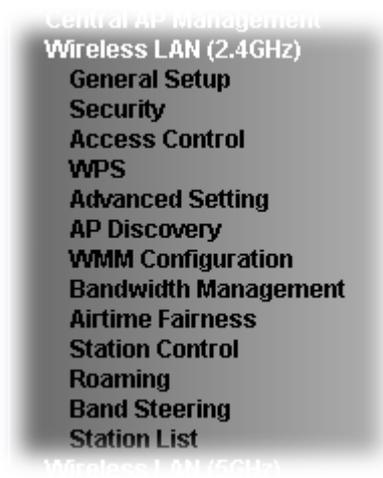

Note: The **Wireless LAN (2.4GHz)** settings will be changed according to the **Operation Mode** selected in section 3.1.

3.5.1 General Setup

By clicking the **General Setup**, a new web page will appear so that you could configure the SSID and the wireless channel. Please refer to the following figure for more information.

Wireless LAN (2.4GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Client Limit (3 ~ 64, default: 64)

Enable Client Limit per SSID (3 ~ 64, default: 64)

Mode : ▼

Channel : ▼


Extension Channel : ▼

Enable 2 Subnet (Simulate 2 APs)

| | Enable | Hide SSID | SSID | Subnet | Isolate Member(0:Untagged) | VLAN ID |
|---|--------------------------|--------------------------|---------------|---------|----------------------------|---------|
| 1 | <input type="checkbox"/> | <input type="checkbox"/> | MK-902-mamie | LAN-A ▼ | <input type="checkbox"/> | 0 |
| 2 | <input type="checkbox"/> | <input type="checkbox"/> | DrayTek-LAN-B | LAN-A ▼ | <input type="checkbox"/> | 0 |
| 3 | <input type="checkbox"/> | <input type="checkbox"/> | | LAN-A ▼ | <input type="checkbox"/> | 0 |
| 4 | <input type="checkbox"/> | <input type="checkbox"/> | | LAN-A ▼ | <input type="checkbox"/> | 0 |

Hide SSID: Prevent SSID from being scanned.
Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.

Available settings are explained as follows:
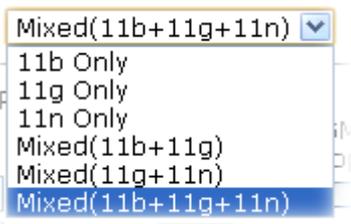
| Item | Description |
|-------------------------------------|--|
| Enable Wireless LAN | Check the box to enable wireless function. |
| Enable Client Limit | Check the box to set the maximum number of wireless stations which try to connect Internet through Vigor device. The number you can set is from 3 to 64. |
| Enable Client Limit per SSID | Define the maximum number of wireless stations per SSID which try to connect to Internet through Vigor device. The number you can set is from 3 to 64. |
| Mode | At present, VigorAP 902 can connect to 11b only, 11g only, 11n only, Mixed (11b+11g), Mixed (11g+11n) and Mixed (11b+11g+11n) stations simultaneously. Simply choose Mixed (11b+11g+11n) mode.  |
| Channel | Means the channel of frequency of the wireless LAN. You may switch channel if the selected channel is under serious interference. If you have no idea of choosing the frequency, |

| | |
|---|--|
| | please select AutoSelect to let system determine for you. |
| Extension Channel | With 802.11n, there is one option to double the bandwidth per channel. The available extension channel options will be varied according to the Channel selected above. Configure the extension channel you want. |
| Enable 2 Subnet (Simulate 2 APs) | <p>Check the box to enable the function for two independent subnets. Once you enable this function, LAN-A and LAN-B would be independent. Next, you can connect one router in LAN-A, and another router in LAN-B. Such mechanism can make you feeling that you have two independent AP/subnet functions in one VigorAP 902.</p> <p>If you disable this function, LAN-A and LAN-B ports are in the same domain. You could only connect one router (no matter connecting to LAN-A or LAN-B) in this environment.</p> |
| Hide SSID | Check it to prevent from wireless sniffing and make it harder for unauthorized clients or STAs to join your wireless LAN. Depending on the wireless utility, the user may only see the information except SSID or just cannot see any thing about VigorAP 902 while site surveying. The system allows you to set four sets of SSID for different usage. |
| SSID | Set a name for VigorAP 902 to be identified. Default settings are DrayTek-LAN-A and DrayTek-LAN-B. When Enable 2 Subnet is enabled, you can specify subnet interface (LAN-A or LAN-B) for each SSID by using the drop down menu. |
| Subnet | Choose LAN-A or LAN-B for each SSID. If you choose LAN-A, the wireless clients connecting to this SSID could only communicate with LAN-A. |
| Isolate Member | Check this box to make the wireless clients (stations) with the same SSID not access for each other. |
| VLAN ID | <p>Type the value for such SSID. Packets transferred from such SSID to LAN will be tagged with the number.</p> <p>If your network uses VLANs, you can assign the SSID to a VLAN on your network. Client devices that associate using the SSID are grouped into this VLAN. The VLAN ID range is from 3 to 4095. The VLAN ID is 0 by default, it means disabling the VLAN function for the SSID.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.5.2 Security


This page allows you to set security with different modes for SSID 1, 2, 3 and 4 respectively. After configuring the correct settings, please click **OK** to save and invoke it.


By clicking the **Security Settings**, a new web page will appear so that you could configure the settings.

Wireless LAN (2.4GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|---|----------------------|--|--------------------------------------|
| SSID | | MK-902-mamie | |
| Mode | | Mixed(WPA+WPA2)/PSK | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | |
| Pass Phrase | | <input type="password" value="*****"/> | |
| Key Renewal Interval | | <input type="text" value="3600"/> seconds | |
| EAPOL Key Retry | | <input checked="" type="radio"/> Enable <input type="radio"/> Disable | |
| WEP | | | |
| <input checked="" type="radio"/> Key 1 : | <input type="text"/> | <input type="text"/> | Hex <input type="button" value="v"/> |
| <input type="radio"/> Key 2 : | <input type="text"/> | <input type="text"/> | Hex <input type="button" value="v"/> |
| <input type="radio"/> Key 3 : | <input type="text"/> | <input type="text"/> | Hex <input type="button" value="v"/> |
| <input type="radio"/> Key 4 : | <input type="text"/> | <input type="text"/> | Hex <input type="button" value="v"/> |
| 802.1x WEP | | <input type="radio"/> Disable <input type="radio"/> Enable | |
| <input type="button" value="OK"/> | | <input type="button" value="Cancel"/> | |

Available settings are explained as follows:
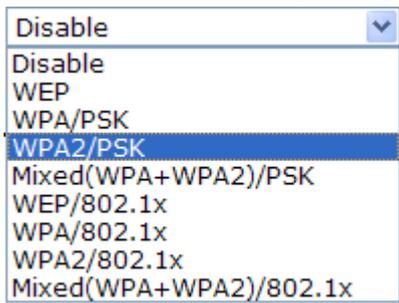
| Item | Description |
|-------------|--|
| Mode | <p>There are several modes provided for you to choose.</p>  <p>Disable - The encryption mechanism is turned off.</p> <p>WEP - Accepts only WEP clients and the encryption key should be entered in WEP Key.</p> <p>WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK - Accepts only WPA clients and the encryption key should be entered in PSK. The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WEP/802.1x - The built-in RADIUS client feature enables VigorAP 902 to assist the remote dial-in user or a wireless station and the RADIUS server in performing mutual</p> |

| | |
|-----------------------------|--|
| | <p>authentication. It enables centralized remote access authentication for network management.</p> <p>The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication. Select WPA, WPA2 or Auto as WPA mode.</p> <p>WPA/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WPA2/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> |
| WPA Algorithms | Select TKIP, AES or TKIP/AES as the algorithm for WPA. Such feature is available for WPA2/802.1x, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Pass Phrase | Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). Such feature is available for WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Key Renewal Interval | WPA uses shared key for authentication to the network. However, normal network operations use a different encryption key that is randomly generated. This randomly generated key that is periodically replaced. Enter the renewal security time (seconds) in the column. Smaller interval leads to greater security but lower performance. Default is 3600 seconds. Set 0 to disable re-key. Such feature is available for WPA2/802.1, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| EAPOL Key Retry | EAPOL means Extensible Authentication Protocol over LAN. Click Enable to make sure that the key will be installed and used once in order to prevent key reinstallation attack. |
| Key 1 – Key 4 | <p>Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(~) except '#' and ','. Such feature is available for WEP mode.</p>  |
| 802.1x WEP | <p>Disable - Disable the WEP Encryption. Data sent to the AP will not be encrypted.</p> <p>Enable - Enable the WEP Encryption.</p> <p>Such feature is available for WEP/802.1x mode.</p> |

Click the link of **RADIUS Server** to access into the following page for more settings.

Radius Server

Use internal RADIUS Server

IP Address

Port

Shared Secret

Session Timeout second(s)

Available settings are explained as follows:

| Item | Description |
|-----------------------------------|--|
| Use internal RADIUS Server | There is a RADIUS server built in VigorAP 902 which is used to authenticate the wireless client connecting to the access point. Check this box to use the internal RADIUS server for wireless security. Besides, if you want to use the external RADIUS server for authentication, do not check this box. Please refer to the section, 3.13 RADIUS Server to configure settings for internal server of VigorAP 902. |
| IP Address | Enter the IP address of external RADIUS server. |
| Port | The UDP port number that the external RADIUS server is using. The default value is 1812, based on RFC 2138. |
| Shared Secret | The external RADIUS server and client share a secret that is used to authenticate the messages sent between them. Both sides must be configured to use the same shared secret. |
| Session Timeout | Set the maximum time of service provided before re-authentication. Set to zero to perform another authentication immediately after the first authentication has successfully completed. (The unit is second.) |

After finishing this web page configuration, please click **OK** to save the settings.

3.5.3 Access Control

For additional security of wireless access, the **Access Control** facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. By clicking the **Access Control**, a new web page will appear, as depicted below, so that you could edit the clients' MAC addresses to control their access rights (deny or allow).

Wireless LAN (2.4GHz) >> Access Control

Available settings are explained as follows:

| Item | Description |
|-----------------------------|--|
| Policy | Select to enable any one of the following policy or disable the policy. Choose Activate MAC address filter to type in the MAC addresses for other clients in the network manually. Choose Blocked MAC address filter , so that all of the devices with the MAC addresses listed on the MAC Address Filter table will be blocked and cannot access into VigorAP 902. <div style="border: 1px solid black; padding: 2px; margin-top: 5px;"> Activate MAC address filter ▼ Disable Activate MAC address filter Blocked MAC address filter </div> |
| MAC Address Filter | Display all MAC addresses that are edited before. |
| Client's MAC Address | Manually enter the MAC address of wireless client. |
| Add | Add a new MAC address into the list. |
| Delete | Delete the selected MAC address in the list. |
| Edit | Edit the selected MAC address in the list. |
| Cancel | Give up the access control set up. |

| | |
|----------------|--|
| Backup | Click it to store the settings (MAC addresses on MAC Address Filter table) on this page as a file. |
| Restore | Click it to restore the settings (MAC addresses on MAC Address Filter table) from an existed file. |

After finishing this web page configuration, please click **OK** to save the settings.

3.5.4 WPS

Open **Wireless LAN>>WPS** to configure the corresponding settings.

Wireless LAN (2.4GHz) >> WPS (Wi-Fi Protected Setup)

Enable WPS 

Wi-Fi Protected Setup Information

| | |
|------------------------|---------------------|
| WPS Configured | Yes |
| WPS SSID | DrayTek-LAN-A |
| WPS Auth Mode | Mixed(WPA+WPA2)/PSK |
| WPS Encryp Type | TKIP/AES |

Device Configure

| | |
|-------------------------------------|---|
| Configure via Push Button | <input type="button" value="Start PBC"/> |
| Configure via Client PinCode | <input type="text"/> <input type="button" value="Start PIN"/> |

Status: Not used

Note: WPS can help your wireless client automatically connect to the Access point.

- : WPS is Disabled.
- : WPS is Enabled.
- : Waiting for WPS requests from wireless clients.

Available settings are explained as follows:

| Item | Description |
|-------------------------------------|---|
| Enable WPS | Check this box to enable WPS setting. |
| WPS Configured | Display related system information for WPS. If the wireless security (encryption) function of VigorAP 902 is properly configured, you can see 'Yes' message here. |
| WPS SSID | Display current selected SSID. |
| WPS Auth Mode | Display current authentication mode of the VigorAP 902. Only WPA2/PSK and WPA/PSK support WPS. |
| WPS Encryp Type | Display encryption mode (None, WEP, TKIP, AES, etc.) of VigorAP 902. |
| Configure via Push Button | Click Start PBC to invoke Push-Button style WPS setup procedure. VigorAP 902 will wait for WPS requests from wireless clients about two minutes. Both ACT and 2.4G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes) |
| Configure via Client PinCode | Type the PIN code specified in wireless client you wish to connect, and click Start PIN button. Both ACT and 2.4G WLAN LEDs on VigorAP 902 will blink quickly when WPS |

is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes).

3.5.5 Advanced Setting


This page is to determine which algorithm will be selected for wireless transmission rate.

Wireless LAN (2.4GHz) >> Advanced Setting

| | |
|--------------------------------|--|
| Channel Width | <input type="radio"/> 20 MHz <input checked="" type="radio"/> Auto 20/40 MHz <input type="radio"/> 40 MHz |
| Packet-OVERDRIVE™ Tx Burst | <input type="radio"/> Enable <input checked="" type="radio"/> Disable (For 11g mode only) |
| Antenna | <input checked="" type="radio"/> 2T2R <input type="radio"/> 1T1R |
| Tx Power | <input checked="" type="radio"/> 100% <input type="radio"/> 80% <input type="radio"/> 60% <input type="radio"/> 30% <input type="radio"/> 20% <input type="radio"/> 10% |
| Rate Adaptation Algorithm | <input checked="" type="radio"/> New <input type="radio"/> Old |
| Fragment Length (256 - 2346) | <input type="text" value="2346"/> bytes |
| RTS Threshold (1 - 2347) | <input type="text" value="2347"/> bytes |
| Country Code | <input type="text"/> (Reference) |
| Auto Channel Filtered Out List | <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 |
| Isolate 2.4GHz and 5GHz bands | <input checked="" type="radio"/> Enable <input type="radio"/> Disable |
| Isolate members with IP | <input type="radio"/> Enable <input checked="" type="radio"/> Disable |
| MAC Clone | <input type="radio"/> Enable <input checked="" type="radio"/> Disable <input type="text"/> |
| MAC Clone: | Set the MAC address of SSIDs and the Wireless client. Please notice that the last byte of this MAC address must be a multiple of 8. |

Available settings are explained as follows:

| Item | Description |
|-------------------------|---|
| Channel Width | <p>20 MHz- the device will use 20MHz for data transmission and receiving between the AP and the stations.</p> <p>Auto 20/40 MHz- the AP will scan for nearby wireless AP, and then use 20MHz if the number of AP is more than 10, or use 40MHz if it's not.</p> <p>40 MHz- the device will use 40MHz for data transmission and receiving between the AP and the stations.</p> |
| Packet-OVERDRIVE | <p>This feature can enhance the performance in data transmission about 40%* more (by checking Tx Burst). It is active only when both sides of Access Point and Station (in wireless client) invoke this function at the same time. That is, the wireless client must support this feature and invoke the function, too.</p> <p>Note: Vigor N61 wireless adapter supports this function. Therefore, you can use and install it into your PC for matching with Packet-OVERDRIVE (refer to the following picture of Vigor N61 wireless utility window, choose Enable for TxBURST on the tab of Option).</p> |

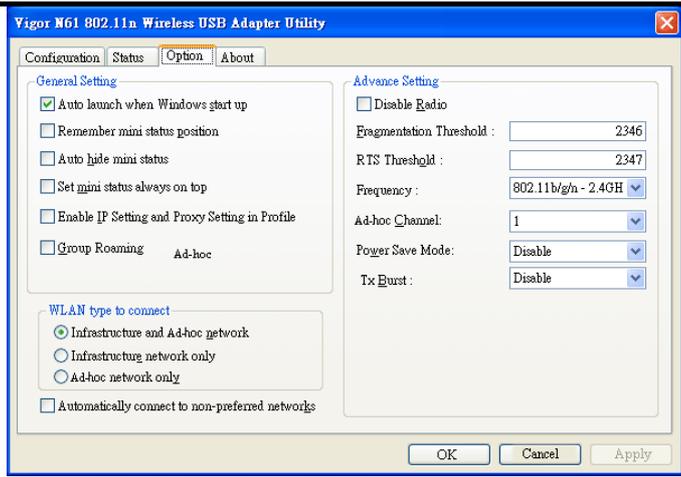

| | |
|--|---|
| <p>Antenna</p> | <p>VigorAP can be attached with two antennas to have good data transmission via wireless connection. However, if you have only one antenna attached, please choose 1T1R.</p>  |
| <p>Tx Power</p> | <p>The default setting is the maximum (100%). Lowering down the value may degrade range and throughput of wireless.</p> |
| <p>Rate Adaptation Algorithm</p> | <p>Wireless transmission rate is adapted dynamically. Usually, performance of “new” algorithm is better than “old”.</p> |
| <p>Fragment Length</p> | <p>Set the Fragment threshold of wireless radio. Do not modify default value if you don’t know what it is, default value is 2346.</p> |
| <p>RTS Threshold</p> | <p>Minimize the collision (unit is bytes) between hidden stations to improve wireless performance. Set the RTS threshold of wireless radio. Do not modify default value if you don’t know what it is, default value is 2347.</p> |
| <p>Country Code</p> | <p>VigorAP broadcasts country codes by following the 802.11d standard. However, some wireless stations will detect / scan the country code to prevent conflict occurred. If conflict is detected, wireless station will be warned and is unable to make network connection. Therefore, changing the country code to ensure successful network connection will be necessary for some clients.</p> |
| <p>Auto Channel Filtered Out List</p> | <p>The selected wireless channels will be discarded if AutoSelect is selected as Channel selection mode in Wireless LAN>>General Setup.</p> |
| <p>Isolate 2.4GHz and 5GHz bands</p> | <p>The default setting is “Enable”. It means that the wireless client using 2.4GHz band is unable to connect to the wireless client with 5GHz band, and vice versa.</p> <p>For WLAN 2.4GHz and 5GHz set with the same SSID name:</p> <ul style="list-style-type: none"> ● No matter such function is enabled or disabled, clients using WLAN 2.4GHz and 5GHz can communicate for each other if Isolate Member (in Wireless LAN>>General Setup) is NOT enabled for such SSID. |

| | |
|--------------------------------|---|
| | <ul style="list-style-type: none"> ● Yet, if the function of Isolate Member (in Wireless LAN>>General Setup) is enabled for such SSID, clients using WLAN 2.4GHz and 5GHz will be unable to communicate with each other. |
| Isolate members with IP | The default setting is “Disable”. If it is enabled, VigorAP will isolate different wireless clients according to their IP address(es). |
| MAC Clone | Click Enable and manually enter the MAC address of the device with SSID 1. The MAC address of other SSIDs will change based on this MAC address. |

After finishing this web page configuration, please click **OK** to save the settings.

3.5.6 AP Discovery

VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. Based on the scanning result, users will know which channel is clean for usage. Also, it can be used to facilitate finding an AP for a WDS link. Notice that during the scanning process (about 5 seconds), no client is allowed to connect to Vigor.

This page is used to scan the existence of the APs on the wireless LAN. Please click **Scan** to discover all the connected APs.

Wireless LAN (2.4GHz) >> Access Point Discovery

Access Point List

Enable AP Monitor Mode

| Index | SSID | BSSID | RSSI | Channel | Encryption | Authentication | Mode | Ch. Width |
|-------|---------------|-------------------|------|---------|------------|---------------------|---------|-----------|
| 1 | staffs_5F | 00:1d:aa:3d:af:d6 | 70% | 1 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| 2 | Michael_2G | 00:1d:aa:fe:fa:58 | 24% | 1 | NONE | | 11b/g/n | 20 |
| 3 | DrayTek_CC... | 00:1d:aa:f8:c9:c8 | 39% | 6 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 4 | RD2_Kyle_2... | 00:1d:aa:c3:3f:00 | 76% | 6 | NONE | | 11b/g/n | 20 |
| 5 | RD8_ACS_TE... | 00:1d:aa:f7:a9:00 | 44% | 6 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| 6 | DrayTek-LA... | 00:50:7f:f0:d5:c0 | 24% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 7 | staffs_6F | 00:1d:aa:55:87:38 | 44% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| 8 | staffs_4F | 00:1d:aa:9d:68:ac | 44% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 9 | staffs | 02:1d:aa:9d:68:ac | 34% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 10 | guests | 0a:1d:aa:9d:68:ac | 34% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 11 | RMA Test | 00:50:7f:52:2f:58 | 34% | 11 | TKIP/AES | WPA/PSK | 11b/g/n | 40 |
| 12 | DrayTek-LA... | 00:50:7f:52:2f:59 | 39% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 13 | AP910C-PQC... | 00:1d:aa:26:8d:30 | 29% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 14 | 1111111111 | 00:1d:aa:7f:4f:20 | 34% | 11 | NONE | | 11b/g/n | 40 |
| 15 | | 02:1d:aa:7c:4f:20 | 24% | 11 | NONE | | 11b/g/n | 40 |
| 16 | Draytek5G | 00:1d:aa:7f:5d:58 | 39% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| 17 | RD2_Test_J... | 00:1d:aa:f3:16:d0 | 39% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| 18 | AP900-PQC-... | 00:1d:aa:7e:87:c8 | 34% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 19 | AP900 PQC ... | 00:1d:aa:9c:f0:58 | 39% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 20 | AP902-PQC-... | 00:1d:aa:67:05:10 | 39% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 21 | DrayTek-LA... | 02:1d:aa:7e:87:c8 | 34% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| 22 | AP910C-PQC... | 00:1d:aa:7f:54:14 | 0% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |

Each item is explained as follows:

| Item | Description |
|-------------------------------|--|
| Enable AP Monitor Mode | This function can help to get and keep the records of APs detected by such device after clicking Scan. In general, only the available AP will be detected by Vigor device. Once the AP is unavailable, it will be deleted from the Access Point List immediately. However, if such function is enabled, the system will keep the record of the AP (once detected by Vigor device) until it is available for Vigor device again. |
| SSID | Display the SSID of the AP scanned by VigorAP 902. |
| BSSID | Display the MAC address of the AP scanned by VigorAP 902. |
| RSSI | Display the signal strength of the access point. RSSI is the abbreviation of Received Signal Strength Indication. |
| Channel | Display the wireless channel used for the AP that is scanned by VigorAP 902. |
| Encryption | Display the encryption mode for the scanned AP. |
| Authentication | Display the authentication type that the scanned AP applied. |
| Mode | Display the wireless connection mode that the scanned AP used. |

| | |
|---------------------------|---|
| Ch. Width | Display the channel width that the scanned AP used. |
| Scan | It is used to discover all the connected AP. The results will be shown on the box above this button |
| Channel Statistics | It displays the statistics for the channels used by APs. |

3.5.7 WMM Configuration

WMM is an abbreviation of Wi-Fi Multimedia. It defines the priority levels for four access categories derived from 802.1d (prioritization tabs). The categories are designed with specific types of traffic, voice, video, best effort and low priority data. There are four accessing categories - AC_BE , AC_BK, AC_VI and AC_VO for WMM.

Wireless LAN (2.4GHz) >> WMM Configuration

WMM Configuration
[Set to Factory Default](#)

WMM Capable Enable Disable
 APSD Capable Enable Disable

WMM Parameters of Access Point

| | Aifsn | CWMin | CWMax | Txop | ACM | AckPolicy |
|-------|-------|-------|-------|------|--------------------------|--------------------------|
| AC_BE | 3 | 15 | 63 | 0 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_BK | 7 | 15 | 1023 | 0 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_VI | 1 | 7 | 15 | 94 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_VO | 1 | 3 | 7 | 47 | <input type="checkbox"/> | <input type="checkbox"/> |

WMM Parameters of Station

| | Aifsn | CWMin | CWMax | Txop | ACM |
|-------|-------|-------|-------|------|--------------------------|
| AC_BE | 3 | 15 | 1023 | 0 | <input type="checkbox"/> |
| AC_BK | 7 | 15 | 1023 | 0 | <input type="checkbox"/> |
| AC_VI | 2 | 7 | 15 | 94 | <input type="checkbox"/> |
| AC_VO | 2 | 3 | 7 | 47 | <input type="checkbox"/> |

Available settings are explained as follows:

| Item | Description |
|---------------------|---|
| WMM Capable | To apply WMM parameters for wireless data transmission, please click the Enable radio button. |
| APSD Capable | APSD (automatic power-save delivery) is an enhancement over the power-save mechanisms supported by Wi-Fi networks. It allows devices to take more time in sleeping state and consume less power to improve the performance by minimizing transmission latency. The default setting is Disable . |
| Aifsn | It controls how long the client waits for each data transmission. Please specify the value ranging from 1 to 15. Such parameter will influence the time delay for WMM accessing categories. For the service of voice or video image, please set small value for AC_VI and AC_VO categories For the service of e-mail or web browsing, please set large value for AC_BE and AC_BK categories. |
| CWMin/CWMax | CWMin means contention Window-Min and CWMax means contention Window-Max. Please specify the value ranging from 1 to 15. Be aware that CWMax value must be greater than CWMin or equals to CWMin value. Both values will influence the time delay for WMM accessing categories. The difference between AC_VI and AC_VO categories must be smaller; however, the difference between AC_BE and AC_BK categories must be greater. |

| | |
|------------------|--|
| Txop | It means transmission opportunity. For WMM categories of AC_VI and AC_VO that need higher priorities in data transmission, please set greater value for them to get highest transmission opportunity. Specify the value ranging from 0 to 65535. |
| ACM | It is an abbreviation of Admission control Mandatory. It can restrict stations from using specific category class if it is checked. Note: VigorAP 902 provides standard WMM configuration in the web page. If you want to modify the parameters, please refer to the Wi-Fi WMM standard specification. |
| AckPolicy | “Uncheck” (default value) the box means the AP will answer the response request while transmitting WMM packets through wireless connection. It can assure that the peer must receive the WMM packets. “Check” the box means the AP will not answer any response request for the transmitting packets. It will have better performance with lower reliability. |

After finishing this web page configuration, please click **OK** to save the settings.

3.5.8 Bandwidth Management

The downstream or upstream from FTP, HTTP or some P2P applications will occupy large of bandwidth and affect the applications for other programs. Please use Bandwidth Management to make the bandwidth usage more efficient.

Wireless LAN (2.4GHz) >> Bandwidth Management

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|------------------------------------|-------------------------------------|---------------|------------------------|
| SSID | | DrayTek-LAN-A | |
| Per Station Bandwidth Limit | | | |
| Enable | <input checked="" type="checkbox"/> | | |
| Upload Limit | User defined | K | bps (Default unit : K) |
| Download Limit | 64K | | bps |
| Auto Adjustment | <input checked="" type="checkbox"/> | | |
| Total Upload Limit | User defined | K | bps (Default unit : K) |
| Total Download Limit | User defined | K | bps (Default unit : K) |

Note:
 1. Download : Traffic going to any station. Upload : Traffic being sent from a wireless station.
 2. Allow auto adjustment could make the best utilization of available bandwidth.

OK Cancel

Available settings are explained as follows:

| Item | Description |
|-----------------------------|--|
| SSID | Display the specific SSID name. |
| Enable | Check this box to enable the bandwidth management for clients. |
| Upload Limit | Define the maximum speed of the data uploading which will be used for the wireless stations connecting to Vigor device with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Download Limit | Define the maximum speed of the data downloading which will be used for the wireless station connecting to Vigor device with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Auto Adjustment | Check this box to have the bandwidth limit determined by the system automatically. |
| Total Upload Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data uploading. |
| Total Download Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data downloading. |

After finishing this web page configuration, please click **OK** to save the settings.

3.5.9 Airtime Fairness

Airtime fairness is essential in wireless networks that must support critical enterprise applications.

Most of the applications are either symmetric or require more downlink than uplink capacity; telephony and email send the same amount of data in each direction, while video streaming and web surfing involve more traffic sent from access points to clients than the other way around. This is essential for ensuring predictable performance and quality-of-service, as well as allowing 802.11n and legacy clients to coexist on the same network. Without airtime fairness, offices using mixed mode networks risk having legacy clients slow down the entire network or letting the fastest client(s) crowd out other users.


With airtime fairness, every client at a given quality-of-service level has equal access to the network's airtime.

The wireless channel can be accessed by only one wireless station at the same time.

The principle behind the IEEE802.11 channel access mechanisms is that each station has **equal probability** to access the channel. When wireless stations have similar data rate, this principle leads to a fair result. In this case, stations get similar channel access time which is called airtime.

However, when stations have various data rate (e.g., 11g, 11n), the result is not fair. The slow stations (11g) work in their slow data rate and occupy too much airtime, whereas the fast stations (11n) become much slower.

Take the following figure as an example, both Station A(11g) and Station B(11n) transmit data packets through VigorAP 902. Although they have equal probability to access the wireless channel, Station B(11n) gets only a little airtime and waits too much because Station A(11g) spends longer time to send one packet. In other words, Station B(fast rate) is obstructed by Station A(slow rate).

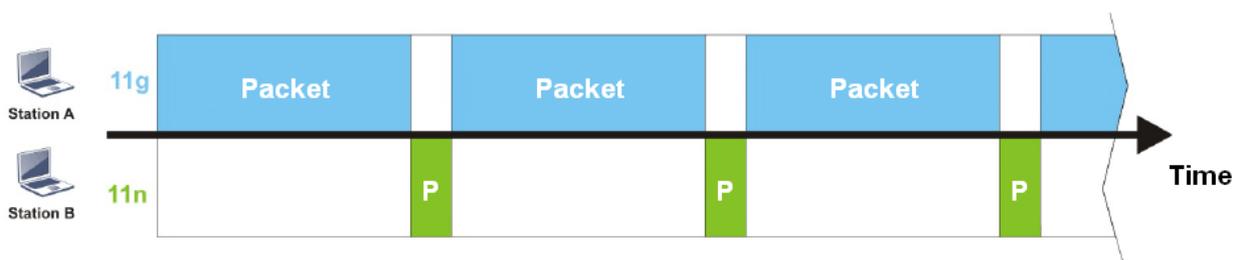

To improve this problem, Airtime Fairness is added for VigorAP 902. Airtime Fairness function tries to assign *similar airtime* to each station (A/B) by controlling TX traffic. In the following figure, Station B(11n) has higher probability to send data packets than Station A(11g). By this way, Station B(fast rate) gets fair airtime and it's speed is not limited by Station A(slow rate).



It is similar to automatic Bandwidth Limit. The dynamic bandwidth limit of each station depends on instant active station number and airtime assignment. Please note that Airtime Fairness of 2.4GHz and 5GHz are independent. But stations of different SSIDs function together, because they all use the same wireless channel. IN SPECIFIC ENVIRONMENTS, this function can reduce the bad influence of slow wireless devices and improve the overall wireless performance.

Suitable environment:

- (1) Many wireless stations.
- (2) All stations mainly use download traffic.
- (3) The performance bottleneck is wireless connection.

Wireless LAN (2.4GHz) >> Airtime Fairness

Enable **Airtime Fairness**
 Triggering Client Number (2 ~ 64, Default: 2)

Note: Please enable or disable this function according to the real situation and user experience. It is NOT suitable for all environments. You could check [Diagnostics >> Station Airtime](#) Graph first.

Available settings are explained as follows:

| Item | Description |
|--------------------------------|--|
| Enable Airtime Fairness | <p>Try to assign similar airtime to each wireless station by controlling TX traffic.</p> <p>Airtime Fairness – Click the link to display the following screen of airtime fairness note.</p> <div style="border: 1px solid gray; padding: 5px; margin: 5px 0;"> <p>Airtime Fairness Note:</p> <ul style="list-style-type: none"> * Airtime is the time where a wireless station occupies the wireless channel. Airtime Fairness function tries to assign similar airtime to each station by controlling TX traffic. IN SPECIFIC ENVIRONMENTS, this function can reduce the bad influence of slow wireless devices and improve the overall wireless performance. * Suitable environment : (1) Many wireless stations. (2) All stations mainly use download traffic. (3) The performance bottleneck is wireless connection. * Triggering Client Number: Airtime Fairness function is applied only when active station number achieves this number. </div> <p>Triggering Client Number –Airtime Fairness function is applied only when active station number achieves this number.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

Note: Airtime Fairness function and Bandwidth Limit function should be mutually exclusive. So their webs have extra actions to ensure these two functions are not enabled simultaneously.

3.5.10 Station Control

Station Control is used to specify the duration for the wireless client to connect and reconnect VigorAP. If such function is not enabled, the wireless client can connect VigorAP until it shuts down.

Such feature is especially useful for free Wi-Fi service. For example, a coffee shop offers free Wi-Fi service for its guests for one hour every day. Then, the connection time can be set as “1 hour” and reconnection time can be set as “1 day”. Thus, the guest can finish his job within one hour and will not occupy the wireless network for a long time.

Note: Up to 300 Wireless Station records are supported by VigorAP.


Wireless LAN (2.4GHz) >> Station Control

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------------------------|--------|
| SSID | | DrayTek-LAN-A | |
| Enable | | <input type="checkbox"/> | |
| Connection Time | | 1 hour | |
| Reconnection Time | | 1 hour | |
| Display All Station Control List | | | |

Note: Once the feature is enabled, the connection time quota will apply to each wireless client (identified by MAC address).

OK Cancel

Available settings are explained as follows:
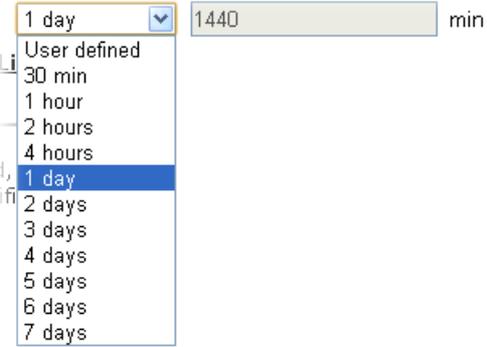
| Item | Description |
|--|--|
| SSID | Display the SSID that the wireless station will use it to connect with Vigor router. |
| Enable | Check the box to enable the station control function. |
| Connection Time / Reconnection Time | Use the drop down list to choose the duration for the wireless client connecting /reconnecting to Vigor device. Or, type the duration manually when you choose User defined .  |
| Display All Station | All the wireless stations connecting to Vigor router by using |

| | |
|---------------------|---|
| Control List | such SSID will be listed on Station Control List. |
|---------------------|---|

After finishing all the settings here, please click **OK** to save the configuration.

3.5.11 Roaming

The network signal for a single wireless access point might be limited by its coverage range. Therefore, if you want to expand the wireless network in a large exhibition with a quick method, you can install multiple access points with enabling the Roaming feature for each AP to reach the purpose of expanding wireless signals seamlessly.

These access points connecting for each other shall be verified by pre-authentication. This page allows you to enable the roaming feature and the pre-authentication.

Wireless LAN (2.4GHz) >> Roaming

AP-assisted Client Roaming Parameters

| | | |
|---|-----|--------------------------|
| <input type="checkbox"/> Minimum Basic Rate | 1 | Mbps |
| <input checked="" type="radio"/> Disable RSSI Requirement | | |
| <input checked="" type="radio"/> Strictly Minimum RSSI | -73 | dBm (42%) (Default: -73) |
| <input checked="" type="radio"/> Minimum RSSI | -66 | dBm (60%) (Default: -66) |
| with Adjacent AP RSSI over | 5 | dB (Default: 5) |

Fast Roaming(WPA2/802.1x)

| | | |
|-----------------------------------|----|---------------------------------|
| <input type="checkbox"/> Enable | | |
| PMK Caching : Cache Period | 10 | minutes (10 ~ 600, Default: 10) |
| Pre-Authentication | | |

OK Cancel

Available settings are explained as follows:


| Item | Description |
|--|---|
| AP-assisted Client Roaming Parameters | <p>When the link rate of wireless station is too low or the signal received by the wireless station is too worse, VigorAP 902 will automatically detect (based on the link rate and RSSI requirement) and cut off the network connection for that wireless station to assist it to connect another Wireless AP to get better signal.</p> <p>Minimum Basic Rate – Check the box to use the drop down list to specify a basic rate (Mbps). When the link rate of the wireless station is below such value, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Disable RSSI Requirement - If it is selected, VigorAP will not terminate the network connection based on RSSI.</p> <p>Strictly Minimum RSSI - VigorAP uses RSSI (received signal strength indicator) to decide to terminate the network connection of wireless station. When the signal strength is below the value (dBm) set here, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Minimum RSSI - When the signal strength of the wireless station is below the value (dBm) set here and adjacent AP (must be DrayTek AP and support such feature too) with higher signal strength value (defined in the field of With Adjacent AP RSSI</p> |

| | |
|--|---|
| | <p>over) is detected by VigorAP 902, VigorAP 902 will terminate the network connection for that wireless station. Later, the wireless station can connect to the adjacent AP (with better RSSI).</p> <ul style="list-style-type: none"> ● With Adjacent AP RSSI over – Specify a value as a threshold. |
| <p>Fast Roaming (WPA2/802.1x)</p> | <p>Enable – Check the box to enable fast roaming configuration.</p> <p>PMK Cache Period - Set the expire time of WPA2 PMK (Pairwise master key) cache. PMK Cache manages the list from the BSSIDs in the associated SSID with which it has pre-authenticated. Such feature is available for WPA2/802.1 mode.</p> <p>Pre-Authentication - Enables a station to authenticate to multiple APs for roaming securer and faster. With the pre-authentication procedure defined in IEEE 802.11i specification, the pre-four-way-handshake can reduce handoff delay perceivable by a mobile node. It makes roaming faster and more secure. (Only valid in WPA2)</p> <p>Enable - Enable IEEE 802.1X Pre-Authentication.</p> <p>Disable - Disable IEEE 802.1X Pre-Authentication.</p> |


After finishing this web page configuration, please click **OK** to save the settings.

3.5.12 Band Steering

Band Steering detects if the wireless clients are capable of 5GHz operation, and steers them to that frequency. It helps to leave 2.4GHz band available for legacy clients, and improves users experience by reducing channel utilization.

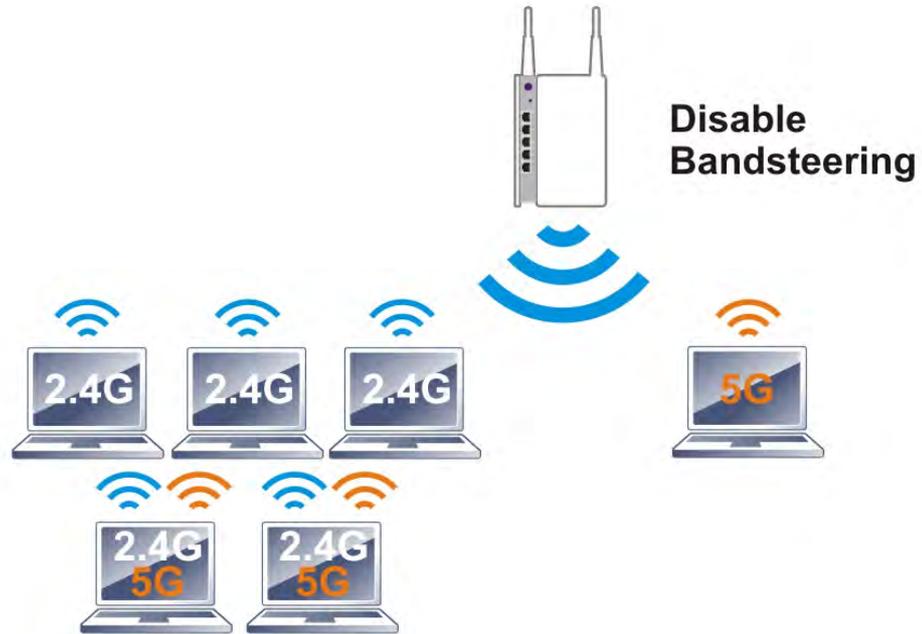

If dual-band is detected, the AP will let the wireless client connect to less congested wireless LAN, such as 5GHz to prevent from network congestion.

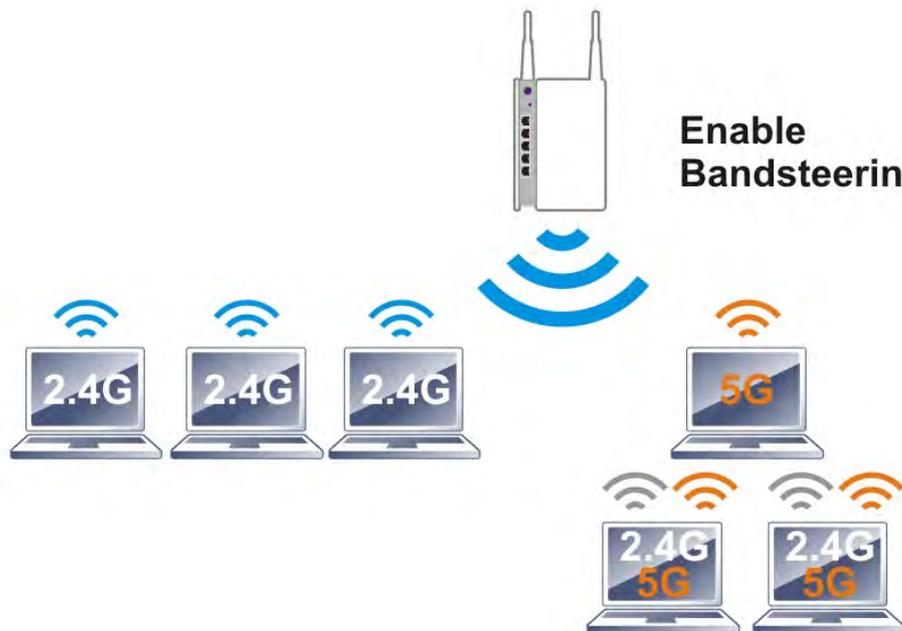

Note: To make Band Steering work successfully, SSID and security on 2.4GHz also MUST be broadcasted on 5GHz.

Open **Wireless LAN (2.4GHz)>>Band Steering** to get the following web page:

Wireless LAN (2.4GHz) >> Band Steering

Enable **Band Steering**

Check Time for WLAN Client 5G Capability seconds (1 ~ 60, Default: 15)

5GHz Minimum RSSI dBm (%) (Default: -78)

(Only do band steering when 5GHz signal is better than Minimum RSSI)


Note: Please setup at least one pair of 2.4GHz and 5GHz Wireless LAN with the same SSID and security.

Available settings are explained as follows:

| Item | Description |
|-----------------------------|---|
| Enable Band Steering | <p>If it is enabled, VigorAP will detect if the wireless client is capable of dual-band or not within the time limit.</p> <p>Check Time... – If the wireless station does not have the capability of 5GHz network connection, the system shall wait and check for several seconds (15 seconds, in default) to make the 2.4GHz network connection. Specify the time limit for VigorAP to detect the wireless client.</p> <p>5GHz Minimum RSSI – The wireless station has the capability of 5GHz network connection, yet the signal performance might not be satisfied. Therefore, when the signal strength is below the value set here while the wireless station connecting to VigorAP 902, VigorAP will allow the client to connect to 2.4GHz network.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

Below shows how Band Steering works.

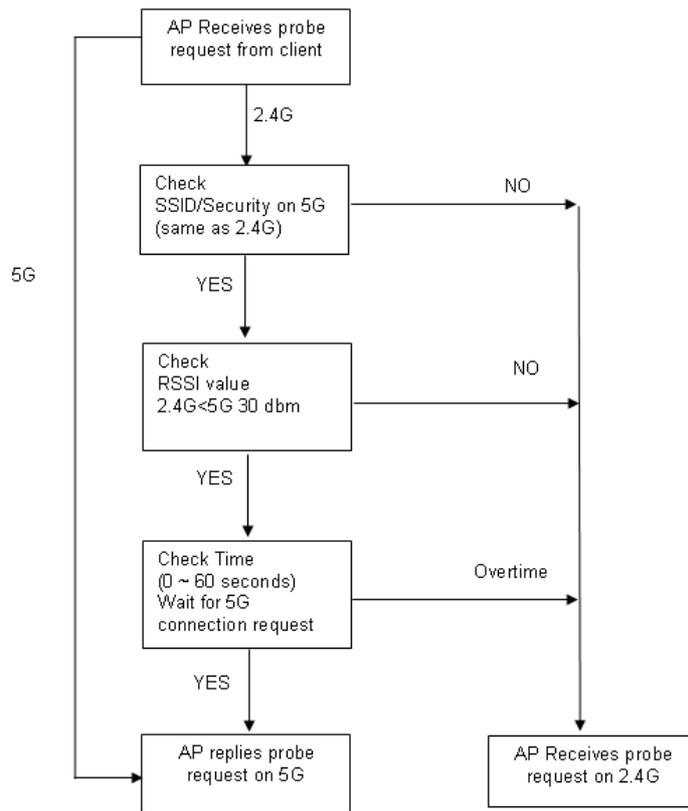

How to Use Band Steering?

1. Open **Wireless LAN(2.4GHz)>>Band Steering**.
2. Check the box of **Enable Band Steering** and use the default value (15) for check time setting.

Wireless LAN (2.4GHz) >> Band Steering

Enable **Band Steering**

Check Time for WLAN Client 5G Capability seconds (1 ~ 60, Default: 15)

5GHz Minimum RSSI dBm (%) (Default: -78)

(Only do band steering when 5GHz signal is better than Minimum RSSI)

Note: Please setup at least one pair of 2.4GHz and 5GHz Wireless LAN with the same SSID and security.

3. Click **OK** to save the settings.
4. Open **Wireless LAN (2.4GHz)>>General Setup** and **Wireless LAN (5GHz)>>General Setup**. Configure SSID as *ap902-BandSteering* for both pages. Click **OK** to save the settings.

Wireless LAN (2.4GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Limit Client (3-64) (default: 64)

Mode :

| | Hide SSID | SSID | Isolate Member | VLAN ID (0:Untagged) | MAC Clone |
|---|--------------------------|----------------------|--------------------------|--------------------------------|--------------------------|
| 1 | <input type="checkbox"/> | ap902-BandSteering | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |
| 2 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |
| 3 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |
| 4 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |

Hide SSID: Prevent SSID from being scanned.

Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.

MAC Clone: Set the MAC address of SSID 1. The MAC addresses of other SSIDs and the Wireless client will also change based on this MAC address. Please notice that the last byte of this MAC address must be a

Same value for 2.4GHz and 5GHz

Wireless LAN (5GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Limit Client (3-64) (default: 64)

Mode :

| | Hide SSID | SSID | Isolate Member | VLAN ID (0:Untagged) |
|---|--------------------------|----------------------|--------------------------|--------------------------------|
| 1 | <input type="checkbox"/> | ap902-BandSteering | <input type="checkbox"/> | <input type="text" value="0"/> |
| 2 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 3 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 4 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> |

Hide SSID: Prevent SSID from being scanned.

Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.

Channel :

Details : 20MHz / 40MHz Ext Ch: 40 , 80MHz Center Ch: 42

- Open **Wireless LAN (2.4GHz)>>Security** and **Wireless LAN (5GHz)>>Security**. Configure Security as *12345678* for both pages. Click **OK** to save the settings.

Wireless LAN (2.4GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------|--------|
| SSID | | | |
| ap902-BandSteering | | | |
| Mode | | | |
| Mixed(WPA+WPA2)/PSK | | | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | | |
| <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | | | |
| Pass Phrase | | | |
| <input type="text" value="12345678"/> | | | |
| Key Renewal Interval | | | |
| <input type="text" value="3600"/> seconds | | | |
| WEP | | | |
| <input type="radio"/> Key 1 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 2 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 3 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 4 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| 802.1x WEP | | | |
| <input type="radio"/> Disable <input type="radio"/> Enable | | | |

Same value for 2.4GHz and 5GHz

Wireless LAN (5GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------|--------|
| SSID | | | |
| ap902-BandSteering | | | |
| Mode | | | |
| Mixed(WPA+WPA2)/PSK | | | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | | |
| <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | | | |
| Pass Phrase | | | |
| <input type="text" value="12345678"/> | | | |
| Key Renewal Interval | | | |
| <input type="text" value="3600"/> seconds | | | |
| PMK Cache Period | | | |
| <input type="text" value="10"/> minutes | | | |
| Pre-Authentication | | | |
| <input checked="" type="radio"/> Disable <input type="radio"/> Enable | | | |
| WEP | | | |
| <input checked="" type="radio"/> Key 1 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 2 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 3 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 4 : <input type="text"/> <input type="text" value="Hex"/> | | | |

- Now, VigorAP 902 will let the wireless clients connect to less congested wireless LAN, such as 5GHz to prevent from network congestion.

3.5.13 Station List

Station List provides the knowledge of connecting wireless clients now along with its status code. Each tab (general, advanced, control, neighbor) will display different status information (including MAC address, Vendor, SSID, Auth, Encrypt, Tx/Rx Rate, Hostname, RSSI, Link Speed, BW, PSM, WMM, PHMd, MCS, Connection Time, Reconnection Time, Approx. Distance, Visit Time, and so on).

General

Display general information (e.g., MAC Address, SSID, Auth, Encrypt, TX/RX Rate) for the station.

Wireless LAN (2.4GHz) >> Station List

Station List

| | | | | | | | General | Advanced | Control | Neighbor |
|-------|-------------------|----------|--------------|------------------|------|------------|---------|----------|---------|----------|
| Index | MAC Address | Vendor | RSSI | Approx. Distance | SSID | Visit Time | | | | |
| 1 | DA:A1:19:E2:65:AD | | 5% (-88dBm) | 141.25m | | 0d:0h: | | | | |
| 2 | 00:50:7F:F0:BD:2B | DrayTek | 52% (-69dBm) | 15.85m | | 0d:0h: | | | | |
| 3 | 00:50:7F:37:6D:E5 | DrayTek | 47% (-71dBm) | 19.95m | | 0d:0h: | | | | |
| 4 | 1C:4B:D6:8B:9C:00 | Azurewav | 18% (-83dBm) | 79.43m | | 0d:1h: | | | | |
| 5 | 00:15:AF:A5:24:A0 | Azurewav | 26% (-79dBm) | 50.12m | | 0d:0h: | | | | |
| 6 | B0:34:95:22:50:FD | Apple | 47% (-71dBm) | 19.95m | | 0d:0h: | | | | |
| 7 | B4:52:7E:D6:68:9D | Sony | 20% (-82dBm) | 70.79m | | 0d:0h: | | | | |
| 8 | 00:1F:3C:51:9C:55 | Intel | 39% (-74dBm) | 28.18m | | 0d:1h: | | | | |

Refresh

Add to Access Control:

Client's MAC Address : : : : : :

- Note:**
1. Approx. Distance is calculated by actual signal strength of device detected. Inaccuracy might occur based on barrier encountered.
 2. Due to the differences in signal strength for different devices, the calculated value of approximate distance also might be different.
 3. Trademarks and brand names are the properties of their respective owners.

Add

Available settings are explained as follows:

| Item | Description |
|------------------------------|---|
| MAC Address | Display the MAC Address for the connecting client. |
| Hostname | Display the host name of the connecting client. |
| SSID | Display the SSID that the wireless client connects to. |
| Auth | Display the authentication that the wireless client uses for connection with such AP. |
| Encrypt | Display the encryption mode used by the wireless client. |
| Tx Rate/Rx Rate | Display the transmission /receiving rate for packets. |
| Refresh | Click this button to refresh the status of station list. |
| Add to Access Control | Client's MAC Address - For additional security of wireless access, the Access Control facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. |

| | |
|------------|---|
| Add | Click this button to add current typed MAC address into Access Control . |
|------------|---|

Advanced

Display more information (e.g., AID, PSM, WMM, RSSI PhMd, BW, MCS, Rate) for the station.

Control


Display connection and reconnection time of the wireless stations.

Neighbor

Display more information for the neighboring wireless stations.

3.6 Wireless LAN (2.4GHz) Settings for Station-Infrastructure Mode

When you choose **Station-Infrastructure** as the operation mode, the Wireless LAN menu items will include General Setup, Site Survey, Statistics and WPS.

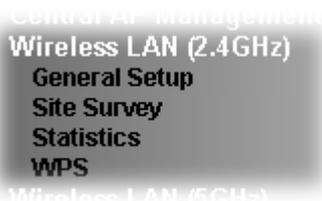

3.6.1 General Setup

By clicking the **General Setup**, a new web page will appear so that you could configure the wireless profile and choose proper mode. Please refer to the following figure for more information.

Wireless LAN (2.4GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Mode :

Profile List

| Profile | SSID | Channel | Authentication | Encryption |
|-------------------------------|--------|---------|----------------|------------|
| <input type="radio"/> PROF001 | 665413 | Auto | OPEN | WEP |

Packet-OVERDRIVE

Tx Burst

Note :

1. Tx Burst only supports 11g mode.

2. The same technology must also be supported in AP to boost WLAN performance.



MAC Clone

Note :

1. Please notice that the last byte of this MAC address must be a multiple of 8.

Available settings are explained as follows:

| Item | Description |
|----------------------------|---|
| Enable Wireless LAN | Check the box to enable wireless function. |
| Mode | At present, VigorAP 902 can connect to 11 b only, 11 g only, 11 n only, Mixed (11b+11g), Mixed (11b+11g+11n) and Mixed (11g+11n) stations simultaneously. Simply choose Mixed (11b+11g+11n) mode. |
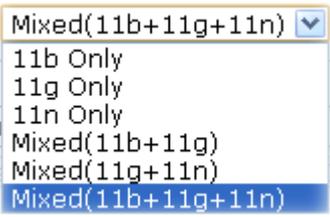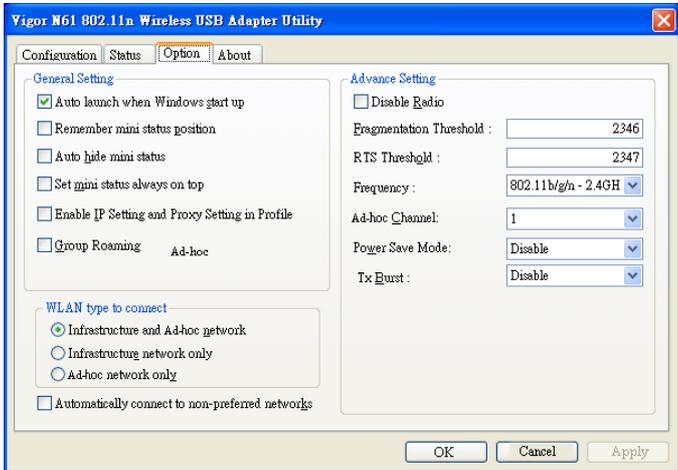
| | |
|-------------------------|--|
| |  |
| Add | Click this button to add new wireless profiles. |
| Delete | Click this button to delete the selected wireless profile. |
| Edit | Click this button to modify the existing wireless profile. |
| Connect | Click this button to connect the wireless station to AP with the selected profile. |
| Packet-OVERDRIVE | <p>This feature can enhance the performance in data transmission about 40%* more (by checking Tx Burst). It is active only when both sides of Access Point and Station (in wireless client) invoke this function at the same time. That is, the wireless client must support this feature and invoke the function, too.</p> <p>Note: Vigor N61 wireless adapter supports this function. Therefore, you can use and install it into your PC for matching with Packet-OVERDRIVE (refer to the following picture of Vigor N61 wireless utility window, choose Enable for TxBURST on the tab of Option).</p>  |
| Mac Clone | Check this box and manually enter the MAC address for Station mode driver. |

After finishing this web page configuration, please click **OK** to save the settings.


Add a New Wireless Profile


To add a new wireless profile for the stations, click **Add**. The following dialog box will appear.

| System Configuration | |
|----------------------|---|
| Profile Name | PROF001 |
| SSID | |
| Network Type | Infrastructure |
| Power Saving Mode | <input checked="" type="radio"/> CAM (Constantly Awake Mode) <input type="radio"/> Power Saving Mode |
| RTS Threshold | <input type="checkbox"/> Used 2347 |
| Fragment Threshold | <input type="checkbox"/> Used 2346 |
| Security Policy | |
| Security Mode | OPEN |
| WEP | |
| WEP Key Length | 64 bit (10 hex digits / 5 ascii keys) |
| WEP Key Entry Method | Hexadecimal |
| WEP Keys | WEP Key 1 : |
| | WEP Key 2 : |
| | WEP Key 3 : |
| | WEP Key 4 : |
| Default Key | Key 1 |

OK Cancel

Available settings are explained as follows:

| Item | Description |
|--------------------------|--|
| Profile Name | Type a name for the new profile. |
| SSID | Type the name for such access point that can be used for connection by the stations. |
| Network Type | <p>Infrastructure - In this mode, you can connect the access point to Ethernet device such as TV and Game player to enable the Ethernet device as a wireless station and join to a wireless network through an access point or AP router.</p> <p>802.11 Ad Hoc – An ad-hoc network is a network where wireless stations can communicate with peer to peer (P2P).</p>  |
| Power Saving Mode | <p>Choose the power saving mode for such device.</p> <p>CAM – Choose this item if it is not necessary to perform</p> |
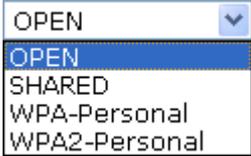
| | | | | | | | | | | | |
|---------------------------|--|------------------------|--|---------------|--------------|------------|--|----------------|---|-------------|----------------------|
| | <p>power saving job.</p> <p>Power Saving Mode – Choose this item to get into the power saving status when there is no data passing through the access point.</p> | | | | | | | | | | |
| RTS Threshold | Set the RTS threshold of wireless radio. Do not modify default value if you don't know what it is, default value is 2347. | | | | | | | | | | |
| Fragment Threshold | Set the Fragment threshold of wireless radio. Do not modify default value if you don't know what it is, default value is 2346. | | | | | | | | | | |
| Security Mode | <p>802.11 standard defines two mechanisms for authentication of wireless LAN clients: Open Authentication and Shared Key Authentication.</p> <p>Choose one of the security modes from the drop down list. If you choose OPEN or SHARED, you have to type WEP information.</p> <p>OPEN – Open authentication is basically null authentication algorithm, which means that there is no verification of the user.</p> <p>SHARED – It works similar to Open authentication with only one major difference. If you choose OPEN with WEP encryption key, the WEP keys is used to encrypt and decrypt the data but not for authentication. In Shared key authentication, WEP encryption will be used for authentication.</p>  <p>If you choose WPA-Personal or WPA2-Personal, the corresponding WPA settings will be listed as follows. You have to choose the WPA algorithms and type the pass phrase for such security mode.</p> <table border="1" data-bbox="639 1440 1362 1523"> <tr> <td colspan="2">Security Policy</td> </tr> <tr> <td>Security Mode</td> <td>WPA-Personal</td> </tr> </table> <table border="1" data-bbox="639 1581 1362 1704"> <tr> <td colspan="2">WPA</td> </tr> <tr> <td>WPA Algorithms</td> <td><input checked="" type="radio"/> TKIP <input type="radio"/> AES</td> </tr> <tr> <td>Pass Phrase</td> <td><input type="text"/></td> </tr> </table> <p>WPA Algorithms – Choose Temporal Key Integrity Protocol (TKIP) or AES for data encryption.</p> <p>Pass Phrase – Please type 8 to 63 alphanumerical characters here.</p> | Security Policy | | Security Mode | WPA-Personal | WPA | | WPA Algorithms | <input checked="" type="radio"/> TKIP <input type="radio"/> AES | Pass Phrase | <input type="text"/> |
| Security Policy | | | | | | | | | | | |
| Security Mode | WPA-Personal | | | | | | | | | | |
| WPA | | | | | | | | | | | |
| WPA Algorithms | <input checked="" type="radio"/> TKIP <input type="radio"/> AES | | | | | | | | | | |
| Pass Phrase | <input type="text"/> | | | | | | | | | | |

WEP


WEP Key Length - WEP (Wired Equivalent Privacy) is a common encryption mode. It is safe enough for home and personal use. However, if you need higher level of security, please consider using WPA encryption (see next section).

Some wireless clients do not support WPA, but support WEP. Therefore WEP is still a good choice for you if you have such kind of client in your network environment.



WEP Key Entry Method - There are two types of WEP key length: 64-bit and 128-bit. Using 128-bit is safer than 64-bit, but it will reduce some data transfer performance.

There are two types of key method: ASCII and Hex. When you select a key format, the number of characters of key will be displayed. For example, if you select 64-bit as key length, and Hex as key format, you'll see the message at the right of Key Format is 'Hex (10 characters)' which means the length of WEP key is 10 characters.




WEP Keys (Key 1 – Key 4) - Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(~) except '#' and ','. Such feature is available for **WEP** mode.

Default Key – Choose one of the key settings.

Below shows an example for a wireless profile created.

Wireless LAN (2.4GHz) >> General Setup

General Setting (IEEE 802.11)

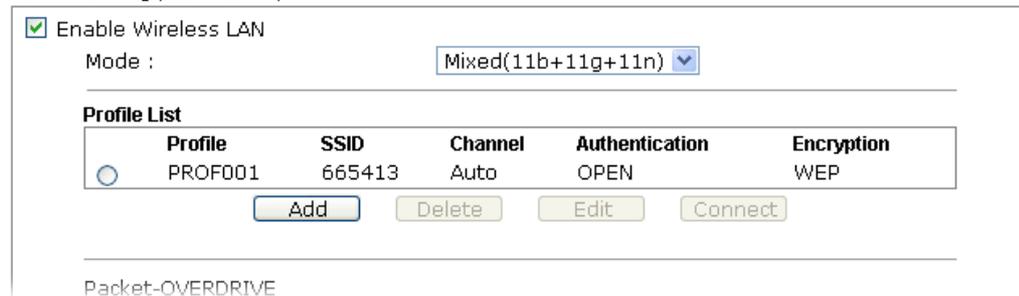

| Profile | SSID | Channel | Authentication | Encryption |
|-------------------------------|--------|---------|----------------|------------|
| <input type="radio"/> PROF001 | 665413 | Auto | OPEN | WEP |

3.6.2 Site Survey

The page will list the access points nearby as VigorAP 902 is set to Station mode. You can select one of the access points to associate.

Wireless LAN (2.4GHz) >> Station Site Survey

Site Survey

| SSID | BSSID | RSSI | Channel | Encryption | Authentication |
|------|-------|------|---------|------------|----------------|
|------|-------|------|---------|------------|----------------|

Available settings are explained as follows:

| Item | Description |
|-----------------------|---|
| SSID | Display the SSID name of the access point. |
| BSSID | Display the BSSID (MAC Address) of the access point. |
| RSSI | Display the signal strength of the access point. RSSI is the abbreviation of Receive Signal Strength Indication. |
| Channel | Display the channel number of the access point. |
| Encryption | Display the encryption setting of the access points. If you have selected the access point with security setting, you have to go to 2-7 Wireless Security to set the same security with the access point you want to associate. |
| Authentication | Display the authentication type of the access point. |
| Scan | Search the stations connected to such access point. |
| Connect | Connect to the wireless AP that you choose. |
| Add Profile | The system will add a profile automatically for you to connect with the wireless AP that you choose. |

Wireless LAN >> Station Site Survey

Site Survey

| | SSID | BSSID | RSSI | Channel | Encryption | Authentication |
|-----------------------|---------------|-------------------|------|---------|------------|---------------------|
| <input type="radio"/> | staffs_5F | 00-1D-AA-C5-59-40 | 81% | 1 | TKIP/AES | Mixed(WPA+WPA2)/PSK |
| <input type="radio"/> | staffs | 02-1D-AA-C5-59-40 | 86% | 1 | TKIP/AES | Mixed(WPA+WPA2)/PSK |
| <input type="radio"/> | guest_5F | 06-1D-AA-C5-59-40 | 81% | 1 | TKIP/AES | Mixed(WPA+WPA2)/PSK |
| <input type="radio"/> | staffs_4F | 0A-1D-AA-C5-59-40 | 86% | 1 | TKIP/AES | Mixed(WPA+WPA2)/PSK |
| <input type="radio"/> | staffs_6F | 00-1D-AA-7F-4D-24 | 50% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK |
| <input type="radio"/> | staffs | 02-1D-AA-78-4D-24 | 55% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK |
| <input type="radio"/> | v2860 PQC ... | 02-1D-AA-86-BA-D0 | 20% | 11 | AES | WPA2/PSK |
| <input type="radio"/> | v2925 pqc ... | 00-1D-AA-7F-5D-8C | 29% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK |
| <input type="radio"/> | DrayTek | 00-1D-AA-7F-5D-58 | 44% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK |
| <input type="radio"/> | | 00-1D-AA-B6-1B-B8 | 91% | 11 | WEP | |
| <input type="radio"/> | RD2_Guest0... | 00-1D-AA-E6-0D-82 | 39% | 10 | NONE | |
| <input type="radio"/> | mars | 00-1D-AA-E4-86-D8 | 24% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK |
| <input type="radio"/> | TEST_001 | 00-50-7F-52-2F-58 | 24% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK |
| <input type="radio"/> | DrayTek-LA... | 00-1D-AA-9D-1F-B8 | 24% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK |

3.6.3 Statistics

This page displays the statistics for data transmission and receiving between the access point and the stations.

Wireless LAN >> Station Statistics

Transmit Statistics

| | |
|--|------|
| Frames Transmitted Successfully | 2407 |
| Frames Transmitted Successfully Without Retry | 2407 |
| Frames Transmitted Successfully After Retry(s) | 0 |
| Frames Fail To Receive ACK After All Retries | 0 |
| RTS Frames Successfully Receive CTS | 0 |
| RTS Frames Fail To Receive CTS | 0 |

Receive Statistics

| | |
|---------------------------------------|-------|
| Frames Received Successfully | 18249 |
| Frames Received With CRC Error | 71873 |
| Frames Dropped Due To Out-of-Resource | 0 |
| Duplicate Frames Received | 19 |

[Reset Counters](#)

Click **Reset Counters** if required.

3.6.4 WPS (Wi-Fi Protected Setup)

Wi-Fi Protected Setup (WPS) is the simplest way to build connection between wireless network clients and the access point. You don't have to select encryption mode and input a long encryption passphrase every time when you need to setup a wireless client. You only have to press a button on wireless client and the access point, and the WPS will do the setup for you.

VigorAP 902 supports two types of WPS: Push-Button Configuration (PBC), and PIN code. If you want to use PBC, you have to switch VigorAP 902 to WPS mode and push a specific button on the wireless client to start WPS mode. You can push Reset/WPS button of this VigorAP 902, or click **PBC Start** button in the web configuration interface to do this; if you want to use PIN code, you have to provide the PIN code of the wireless client you wish to connect to this access point and then switch the wireless client to WPS mode.

Note: WPS function of VigorAP 902 will not work for those wireless AP/clients do not support WPS.

To use WPS function to set encrypted connection between VigorAP 902 and WPS-enabled wireless AP, please open **Wireless LAN >>WPS**. The following information will be displayed:

Wireless LAN (2.4GHz) >> Wi-Fi Protected Setup (STA)

WPS AP site survey

| No. | SSID | BSSID | RSSI | ch. | Auth. | Encrypt | ver. | Status |
|-----|-------------------|--------------|------|---|------------------------------|-----------|------|---------|
| ● | staffs_5F | 001DAABDE608 | 76% | 1 | Mixed(WPA+WPA2)/PSK TKIP/AES | TKIP/AES | 1.0 | Unconf. |
| ● | mars | 001DAAE486D8 | 29% | 13 | Mixed(WPA+WPA2)/PSK TKIP/AES | TKIP/AES | 1.0 | Unconf. |
| ● | RD2_Test_Johnny00 | 001DAAE1D458 | 44% | 8 | Mixed(WPA+WPA2)/PSK TKIP/AES | TKIP/AES | 1.0 | Conf. |
| ● | 2862_kyeh_test | 001DAAEA38A0 | 24% | 9 | Mixed(WPA+WPA2)/PSK TKIP/AES | TKIP/AES | 1.0 | Conf. |
| ● | RD8_Robin | 001DAADF0CF0 | 39% | 11 | Mixed(WPA+WPA2)/PSK TKIP/AES | TKIP/AES | 1.0 | Unconf. |
| ● | B BBBB | 001DAAE60E50 | 0% | 3 | undefined | undefined | ? | ? |
| ● | WEP | 16 | 2% | UUID:000010000000000000000000000000001daae60e50 | RF Band:2.4G/5G | | ? | ? |
| ● | 2860 kaylee 2.4G | 001DAA80BC90 | 15% | 9 | Mixed(WPA+WPA2)/PSK TKIP/AES | TKIP/AES | 1.0 | Unconf. |
| ● | v2133_D1 | 001DAAEEC1C0 | 0% | 6 | Mixed(WPA+WPA2)/PSK TKIP/AES | TKIP/AES | 1.0 | Conf. |
| ● | v2820 PQC ting | 00507FEDE2D8 | 0% | 6 | WPA/PSK | TKIP | 1.0 | Unconf. |
| ● | Jackson_2133 | 001DAAEEC1A8 | 5% | 6 | OPEN | NONE | 1.0 | Conf. |

Refresh

Device Configure

Configure via Push Button

Configure via Client PinCode

Status: Idle

Available settings are explained as follows:

| Item | Description |
|-------------------------------|--|
| SSID | Display the SSID name of the access point. |
| BSSID | Display the BSSID (MAC Address) of the access point. |
| RSSI | Display the signal strength of the access point. RSSI is the abbreviation of Receive Signal Strength Indication. |
| Ch. (Channel) | Display the channel number of the access point. |
| Auth. (Authentication) | Display the authentication type of the access point. |
| Encrypt (Encryption) | Display the encryption setting of the access points. If you have selected the access point with security setting, you have to go to 2-7 Wireless Security to set the same security with the access point you want to associate. |
| Ver. (Version) | Display the version of WPS. |
| Status | Display the status of WPS access point. |
| Refresh | Click this button to refresh the AP site survey. |
| Start PBC | Click Start PBC to make a WPS connection within 2 minutes. |
| Start PIN | When using PinCode method, it is required to enter PIN Code (Personal Identification Number Code, 8-digit numbers) into Registrar. When the wireless station is Enrollee, the users can use Renew PIN to re-generate a new PIN code. |
| Renew PIN | Click this button to re-generate a new PIN code. |

Note: When you're using PBC type WPS setup, you must press **PBC** button (hardware or software) of wireless client within 2 minutes. If you didn't press **PBC** button of wireless client within this time period, please press **PBC** button (hardware or software) of this access point again.

3.7 Wireless LAN Settings for AP Bridge-Point to Point/AP Bridge-Point to Multi-Point Mode

When you choose AP Bridge-Point to Point or Point-to Multi-Point Mode as the operation mode, the Wireless LAN menu items will include General Setup, Advanced Setting, AP Discovery, and WDS AP Status.



AP Bridge-Point to Point allows VigorAP 902 to connect to **another** VigorAP 902 which uses the same mode. All wired Ethernet clients of both VigorAP 902s will be connected together.

Point-to Multi-Point Mode allows AP 902 to connect up to **four** AP 902s which uses the same mode. All wired Ethernet clients of every VigorAP 902 will be connected together.

3.7.1 General Setup

By clicking the **General Setup**, a new web page will appear so that you could configure security, Tx Burst and choose proper mode. Please refer to the following figure for more information.

Wireless LAN (2.4GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Mode :

Channel :

Extension Channel :

Note: Enter the configuration of APs which AP902 want to connect.

PHY Mode : HTMIX

Security :

Disabled WEP TKIP AES


Key :

Peer MAC Address :

: : : : :

Available settings are explained as follows:

| Item | Description |
|----------------------------|--|
| Enable Wireless LAN | Check the box to enable wireless function. |
| Mode | At present, VigorAP 902 can connect to 11b only, 11g only, 11n only, Mixed (11b+11g), Mixed (11g+11n) and Mixed (11b+11g+11n) stations simultaneously. Simply choose Mixed (11b+11g+11n) mode. |
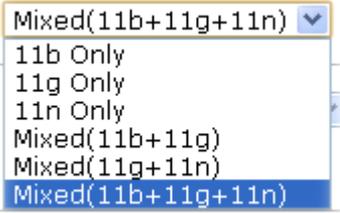
| | |
|--------------------------|--|
| |  |
| Channel | Means the channel of frequency of the wireless LAN. The default channel is 11. You may switch channel if the selected channel is under serious interference. If you have no idea of choosing the frequency, please select AutoSelect to let system determine for you. |
| Extension Channel | With 802.11n, there is one option to double the bandwidth per channel. The available extension channel options will be varied according to the Channel selected above. |
| Rate | If you choose 11g Only, 11b Only or 11n Only, such feature will be available for you to set data transmission rate. |
| PHY Mode | Data will be transmitted via HTMIX mode. Each access point should be setup to the same PHY Mode for connecting with each other. |
| Security | Select WEP, TKIP or AES as the encryption algorithm. Type the key number if required. |
| Peer MAC Address | Type the peer MAC address for the access point that VigorAP 902 connects to. |

After finishing this web page configuration, please click **OK** to save the settings.

3.7.2 Advanced Setting



This page is to determine which algorithm will be selected for wireless transmission rate.

Wireless LAN (2.4GHz) >> Advanced Setting

| | |
|--------------------------------|--|
| Channel Width | <input type="radio"/> 20 MHz <input checked="" type="radio"/> Auto 20/40 MHz <input type="radio"/> 40 MHz |
| Packet-OVERDRIVE™ Tx Burst | <input type="radio"/> Enable <input checked="" type="radio"/> Disable (For 11g mode only) |
| Antenna | <input checked="" type="radio"/> 2T2R <input type="radio"/> 1T1R |
| Tx Power | <input checked="" type="radio"/> 100% <input type="radio"/> 80% <input type="radio"/> 60% <input type="radio"/> 30% <input type="radio"/> 20% <input type="radio"/> 10% |
| Rate Adaptation Algorithm | <input checked="" type="radio"/> New <input type="radio"/> Old |
| Fragment Length (256 - 2346) | <input type="text" value="2346"/> bytes |
| RTS Threshold (1 - 2347) | <input type="text" value="2347"/> bytes |
| Country Code | <input type="text"/> (Reference) |
| Auto Channel Filtered Out List | <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 |
| Isolate 2.4GHz and 5GHz bands | <input checked="" type="radio"/> Enable <input type="radio"/> Disable |
| Isolate members with IP | <input type="radio"/> Enable <input checked="" type="radio"/> Disable |
| MAC Clone | <input type="radio"/> Enable <input checked="" type="radio"/> Disable <input type="text"/> |
| MAC Clone: | Set the MAC address of SSIDs and the Wireless client. Please notice that the last byte of this MAC address must be a multiple of 8. |

Available settings are explained as follows:

| Item | Description |
|-------------------------|---|
| Channel Width | <p>20 MHz - AP will use 20MHz for data transmission and receiving between the AP and the stations.</p> <p>Auto 20/40 MHz - AP will scan for nearby wireless AP, and then use 20MHz if the number of AP is more than 10, or use 40MHz if it's not.</p> <p>40 MHz - AP will use 40MHz for data transmission and receiving between the AP and the stations.</p> |
| Packet-OVERDRIVE | <p>This feature can enhance the performance in data transmission about 40%* more (by checking Tx Burst). It is active only when both sides of Access Point and Station (in wireless client) invoke this function at the same time. That is, the wireless client must support this feature and invoke the function, too.</p> <p>Note: Vigor N61 wireless adapter supports this function. Therefore, you can use and install it into your PC for matching with Packet-OVERDRIVE (refer to the following picture of Vigor N61 wireless utility window, choose Enable for TxBURST on the tab of Option).</p> |
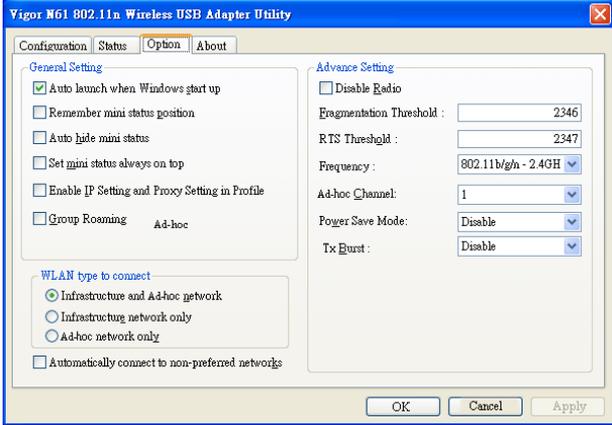
| | |
|---------------------------------------|--|
| |  |
| Antenna | <p>VigorAP can be attached with two antennas to have good data transmission via wireless connection. However, if you have only one antenna attached, please choose 1T1R.</p>  |
| Tx Power | <p>The default setting is the maximum (100%). Lowering down the value may degrade range and throughput of wireless.</p>  |
| Rate Adaptation Algorithm | <p>Wireless transmission rate is adapted dynamically. Usually, performance of “new” algorithm is better than “old”.</p> |
| Fragment Length | <p>Set the Fragment threshold of wireless radio. Do not modify default value if you don’t know what it is, default value is 2346.</p> |
| RTS Threshold | <p>Minimize the collision (unit is bytes) between hidden stations to improve wireless performance. Set the RTS threshold of wireless radio. Do not modify default value if you don’t know what it is, default value is 2347.</p> |
| Country Code | <p>VigorAP broadcasts country codes by following the 802.11d standard. However, some wireless stations will detect / scan the country code to prevent conflict occurred. If conflict is detected, wireless station will be warned and is unable to make network connection. Therefore, changing the country code to ensure successful network connection will be necessary for some clients.</p> |
| Auto Channel Filtered Out List | <p>The selected wireless channels will be discarded if AutoSelect is selected as Channel selection mode in Wireless LAN>>General Setup.</p> |
| Isolate 2.4GHz and 5GHz bands | <p>The default setting is “Enable”. It means that the wireless client using 2.4GHz band is unable to connect to the wireless client with 5GHz band, and vice versa.</p> |

| | |
|--------------------------------|--|
| | <p>For WLAN 2.4GHz and 5GHz set with the same SSID name:</p> <ul style="list-style-type: none"> No matter such function is enabled or disabled, clients using WLAN 2.4GHz and 5GHz can communicate for each other if Isolate Member (in Wireless LAN>>General Setup) is NOT enabled for such SSID. Yet, if the function of Isolate Member (in Wireless LAN>>General Setup) is enabled for such SSID, clients using WLAN 2.4GHz and 5GHz will be unable to communicate with each other. |
| Isolate members with IP | <p>The default setting is “Disable”.</p> <p>If it is enabled, VigorAP will isolate different wireless clients according to their IP address(es).</p> |
| MAC Clone | <p>Click Enable and manually enter the MAC address of the device with SSID 1. The MAC address of other SSIDs will change based on this MAC address.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.7.3 AP Discovery

VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. Based on the scanning result, users will know which channel is clean for usage. Also, it can be used to facilitate finding an AP for a WDS link. Notice that during the scanning process (about 5 seconds), no client is allowed to connect to VigorAP 902.

This page is used to scan the existence of the APs on the wireless LAN. Yet, only the AP which is in the same channel of VigorAP 902 can be found. Please click **Scan** to discover all the connected APs.

Wireless LAN (2.4GHz) >> Access Point Discovery

Access Point List

Enable AP Monitor Mode

| Select | Index | SSID | BSSID | RSSI | Channel | Encryption | Authentication | Mode | Ch. Width | Last Detected |
|-----------------------|-------|---------------|-------------------|------|---------|------------|---------------------|---------|-----------|------------------|
| <input type="radio"/> | 1 | staffs_5F | 00:1d:aa:3d:af:d6 | 70% | 1 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 | Oct 21, 16:11:32 |
| <input type="radio"/> | 2 | Michael_2G | 00:1d:aa:fe:fa:58 | 15% | 1 | NONE | | 11b/g/n | 40 | Oct 21, 16:08:32 |
| <input type="radio"/> | 3 | RD2_Kyle_2... | 00:1d:aa:c3:3f:00 | 65% | 6 | NONE | | 11b/g/n | 40 | Oct 21, 16:11:32 |
| <input type="radio"/> | 4 | RD8_ACS_TE... | 00:1d:aa:f7:a9:00 | 20% | 6 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 | Oct 21, 16:11:32 |
| <input type="radio"/> | 5 | DrayTek-LA... | 00:50:7f:f0:d5:c0 | 34% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 | Oct 21, 16:11:32 |
| <input type="radio"/> | 6 | staffs_6F | 00:1d:aa:55:87:38 | 39% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 | Oct 21, 16:11:32 |
| <input type="radio"/> | 7 | staffs | 02:1d:aa:50:87:38 | 39% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 | Oct 21, 16:11:32 |
| <input type="radio"/> | 33 | DrayTek | 00:1d:aa:ea:98:68 | 0% | 6 | NONE | | 11b/g/n | 40 | Oct 21, 15:28:32 |
| <input type="radio"/> | 34 | DrayTek-LA... | 02:1d:aa:9e:2b:38 | 0% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 | Oct 21, 15:28:32 |
| <input type="radio"/> | 35 | DrayTek | 00:1d:aa:f5:ae:c0 | 15% | 6 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 | Oct 21, 15:48:32 |
| <input type="radio"/> | 36 | DrayTek | 00:1d:aa:74:da:38 | 24% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 | Oct 21, 16:11:32 |

[Scan](#)

See [Channel Statistics](#)

Note: During the scanning process (about 5 seconds), no station is allowed to connect with the AP.

AP's MAC Address : : : : :

AP's SSID

Add to **WDS Settings**:

Available settings are explained as follows:

| Item | Description |
|-------------------------------|---|
| Enable AP Monitor Mode | <p>This function can help to get and keep the records of APs detected by such device after clicking Scan.</p> <p>In general, only the available AP will be detected by Vigor device. Once the AP is unavailable, it will be deleted from the Access Point List immediately. However, if such function is enabled, the system will keep the record of the AP (once detected by Vigor device) until it is available for Vigor device again.</p> |
| SSID | Display the SSID of the AP scanned by VigorAP 902. |
| BSSID | Display the MAC address of the AP scanned by VigorAP 902. |
| RSSI | Display the signal strength of the access point. RSSI is the abbreviation of Received Signal Strength Indication. |
| Channel | Display the wireless channel used for the AP that is scanned by VigorAP 902. |
| Encryption | Display the encryption mode for the scanned AP. |
| Authentication | Display the authentication type that the scanned AP applied. |
| Mode | Display the wireless connection mode that the scanned AP used. |
| Ch. Width | Display the channel width that the scanned AP used. |
| Scan | It is used to discover all the connected AP. The results will be shown on the box above this button |
| Channel Statistics | It displays the statistics for the channels used by APs. |
| AP's MAC Address | If you want the found AP applying the WDS settings, please type in the AP's MAC address. |
| AP's SSID | To specify an AP to be applied with WDS settings, you can specify MAC address or SSID for the AP. Here is the place that you can type the SSID of the AP. |
| Add | Type the MAC address of the AP. Click Add . Later, the MAC address of the AP will be added and be shown on WDS settings page. |

3.7.4 WDS AP Status

VigorAP 902 can display the status such as MAC address, physical mode, power save and bandwidth for the working AP connected with WDS. Click **Refresh** to get the newest information.

Wireless LAN >> WDS AP Status


WDS AP List

| AID | MAC Address | 802.11 Physical Mode | Power Save | Bandwidth |
|-----|-------------------|----------------------|------------|-----------|
| 1 | 00:50:7F:C9:76:0C | CCK | OFF | 20M |

Refresh

3.8 Wireless LAN (2.4GHz) Settings for AP Bridge-WDS Mode

When you choose AP Bridge-WDS as the operation mode, the Wireless LAN menu items will include General Setup, Security, Access Control, WPS, Advanced Setting, AP Discovery, WDS AP Status, WMM Configuration, Bandwidth Management, Airtime Fairness, Station Control, Roaming, Band Steering and Station List.

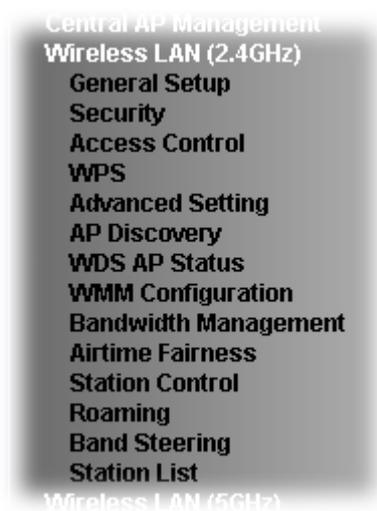

3.8.1 General Setup

By clicking the **General Setup**, a new web page will appear so that you could configure security, Tx Burst and choose proper mode. Please refer to the following figure for more information.

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Client Limit (3 ~ 64, default: 64)

Enable Client Limit per SSID (3 ~ 64, default: 64)

Mode :

Channel :

Extension Channel :

Enable 2 Subnet (Simulate 2 APs)

| | Enable | Hide SSID | SSID | Subnet | Isolate LAN | Isolate Member(0:Untagged) | VLAN ID |
|---|--------------------------|--------------------------|--|------------------------------------|--------------------------|----------------------------|--------------------------------|
| 1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="MK-902-mamie"/> | <input type="text" value="LAN-A"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="DrayTek-LAN-B"/> | <input type="text" value="LAN-A"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 3 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text"/> | <input type="text" value="LAN-A"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 4 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text"/> | <input type="text" value="LAN-A"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |


Hide SSID: Prevent SSID from being scanned.
Isolate LAN: Wireless clients (stations) with the same SSID cannot access wired PCs on LAN.
Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.
Note: Enter the configuration of APs which AP902 want to connect.
 Remote AP should always use LAN-A or SSID1 MAC address to connect AP902 WDS.

PHY Mode : HTMIX

| | |
|--|--|
| 1. Subnet <input type="text" value="LAN-A"/> Security: <input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES Key : <input type="text"/> Peer MAC Address : <input type="text"/> : <input type="text"/> | 3. Subnet <input type="text" value="LAN-A"/> Security: <input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES Key : <input type="text"/> Peer MAC Address : <input type="text"/> : <input type="text"/> |
| 2. Subnet <input type="text" value="LAN-A"/> Security: <input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES Key : <input type="text"/> Peer MAC Address : <input type="text"/> : <input type="text"/> | 4. Subnet <input type="text" value="LAN-A"/> Security: <input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES Key : <input type="text"/> Peer MAC Address : <input type="text"/> : <input type="text"/> |

Available settings are explained as follows:

| Item | Description |
|-------------------------------------|--|
| Enable Wireless LAN | Check the box to enable wireless function. |
| Enable Client Limit | Check the box to set the maximum number of wireless stations which try to connect Internet through VigorAP. The number you can set is from 3 to 64. |
| Enable Client Limit per SSID | Define the maximum number of wireless stations per SSID which try to connect to Internet through Vigor device. The number you can set is from 3 to 64. |
| Mode | At present, VigorAP 902 can connect to 11b only, 11g only, 11n only, Mixed (11b+11g), Mixed (11g+11n) and Mixed (11b+11g+11n) stations simultaneously. Simply choose Mixed (11b+11g+11n) mode. |
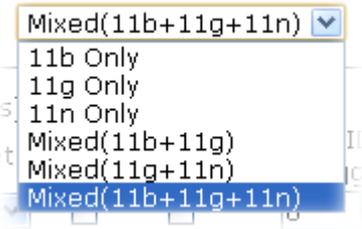
| | |
|---|--|
| |  |
| Channel | Means the channel of frequency of the wireless LAN. You may switch channel if the selected channel is under serious interference. If you have no idea of choosing the frequency, please select AutoSelect to let system determine for you. |
| Extension Channel | With 802.11n, there is one option to double the bandwidth per channel. The available extension channel options will be varied according to the Channel selected above. Configure the extension channel you want. |
| Enable 2 Subnet (Simulate 2 APs) | <p>Check the box to enable the function for two independent subnets. Once you enable this function, LAN-A and LAN-B would be independent. Next, you can connect one router in LAN-A, and another router in LAN-B. Such mechanism can make you feeling that you have two independent AP/subnet functions in one VigorAP 902.</p> <p>If you disable this function, LAN-A and LAN-B ports are in the same domain. You could only connect one router (no matter connecting to LAN-A or LAN-B) in this environment.</p> |
| Enable | Check the box to enable the SSID configuration. |
| Hide SSID | Check it to prevent from wireless sniffing and make it harder for unauthorized clients or STAs to join your wireless LAN. Depending on the wireless utility, the user may only see the information except SSID or just cannot see any thing about VigorAP 902 while site surveying. The system allows you to set four sets of SSID for different usage. |
| SSID | Set a name for VigorAP 902 to be identified. Default settings are DrayTek-LAN-A and DrayTek-LAN-B. When Enable 2 Subnet is enabled, you can specify subnet interface (LAN-A or LAN-B) for each SSID by using the drop down menu. |
| Subnet | Choose LAN-A or LAN-B for each SSID. If you choose LAN-A, the wireless clients connecting to this SSID could only communicate with LAN-A. |
| Isolate LAN | Check this box to make the wireless clients (stations) with the same SSID not accessing for wired PC in LAN. |
| Isolate Member | Check this box to make the wireless clients (stations) with the same SSID not accessing for each other. |
| VLAN ID | <p>Type the value for such SSID. Packets transferred from such SSID to LAN will be tagged with the number.</p> <p>If your network uses VLANs, you can assign the SSID to a VLAN on your network. Client devices that associate using the SSID are grouped into this VLAN. The VLAN ID range is</p> |

| | |
|-------------------------|---|
| | from 3 to 4095. The VLAN ID is 0 by default, it means disabling the VLAN function for the SSID. |
| Rate | If you choose 11g Only, 11b Only or 11n Only, such feature will be available for you to set data transmission rate. |
| PHY Mode | Data will be transmitted via HTMIX mode. Each access point should be setup to the same PHY Mode for connecting with each other. |
| Subnet | Choose LAN-A or LAN-B for each SSID. |
| Security | Select Disabled, WEP, TKIP or AES as the encryption algorithm. |
| Peer MAC Address | Four peer MAC addresses are allowed to be entered in this page at one time. |

After finishing this web page configuration, please click **OK** to save the settings.

3.8.2 Security


This page allows you to set security with different modes for SSID 1, 2, 3 and 4 respectively. After configuring the correct settings, please click **OK** to save and invoke it.


By clicking the **Security Settings**, a new web page will appear so that you could configure the settings.

Wireless LAN (2.4GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|----------------------|----------------------|----------------------------------|
| SSID: MK-902-mamie | | | |
| Mode: <input type="text" value="Mixed(WPA+WPA2)/PSK"/> | | | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms: <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | | | |
| Pass Phrase: <input type="text" value="*****"/> | | | |
| Key Renewal Interval: <input type="text" value="3600"/> seconds | | | |
| EAPOL Key Retry: <input checked="" type="radio"/> Enable <input type="radio"/> Disable | | | |
| WEP | | | |
| <input checked="" type="radio"/> Key 1 : | <input type="text"/> | <input type="text"/> | <input type="text" value="Hex"/> |
| <input type="radio"/> Key 2 : | <input type="text"/> | <input type="text"/> | <input type="text" value="Hex"/> |
| <input type="radio"/> Key 3 : | <input type="text"/> | <input type="text"/> | <input type="text" value="Hex"/> |
| <input type="radio"/> Key 4 : | <input type="text"/> | <input type="text"/> | <input type="text" value="Hex"/> |
| 802.1x WEP: <input type="radio"/> Disable <input type="radio"/> Enable | | | |

Available settings are explained as follows:
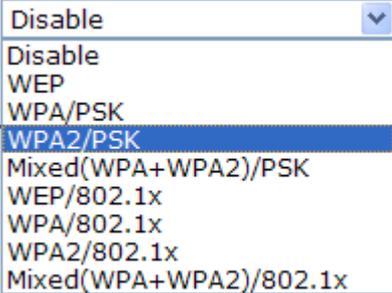
| Item | Description |
|-------------|--|
| Mode | <p>There are several modes provided for you to choose.</p>  <p>Disable - The encryption mechanism is turned off.</p> <p>WEP - Accepts only WEP clients and the encryption key should be entered in WEP Key.</p> <p>WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK - Accepts only WPA clients and the encryption key should be entered in PSK. The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WEP/802.1x - The built-in RADIUS client feature enables VigorAP 902 to assist the remote dial-in user or a wireless station and the RADIUS server in performing mutual</p> |

| | |
|-----------------------------|--|
| | <p>authentication. It enables centralized remote access authentication for network management.</p> <p>The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication. Select WPA, WPA2 or Auto as WPA mode.</p> <p>WPA/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WPA2/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> |
| WPA Algorithms | Select TKIP, AES or TKIP/AES as the algorithm for WPA. Such feature is available for WPA2/802.1x, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Pass Phrase | Either 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). Such feature is available for WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Key Renewal Interval | WPA uses shared key for authentication to the network. However, normal network operations use a different encryption key that is randomly generated. This randomly generated key that is periodically replaced. Enter the renewal security time (seconds) in the column. Smaller interval leads to greater security but lower performance. Default is 3600 seconds. Set 0 to disable re-key. Such feature is available for WPA2/802.1, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| EAPOL Key Retry | EAPOL means Extensible Authentication Protocol over LAN. Click Enable to make sure that the key will be installed and used once in order to prevent key reinstallation attack. |
| Key 1 – Key 4 | <p>Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(-) except '#' and ','. Such feature is available for WEP mode.</p>  |
| 802.1x WEP | <p>Disable - Disable the WEP Encryption. Data sent to the AP will not be encrypted.</p> <p>Enable - Enable the WEP Encryption.</p> <p>Such feature is available for WEP/802.1x mode.</p> |

Click the link of **RADIUS Server** to access into the following page for more settings.

Radius Server

Use internal RADIUS Server

IP Address

Port

Shared Secret

Session Timeout second(s)

Available settings are explained as follows:

| Item | Description |
|-----------------------------------|--|
| Use internal RADIUS Server | There is a RADIUS server built in VigorAP 902 which is used to authenticate the wireless client connecting to the access point. Check this box to use the internal RADIUS server for wireless security. Besides, if you want to use the external RADIUS server for authentication, do not check this box. Please refer to the section, 3.13 RADIUS Server to configure settings for internal server of VigorAP 902. |
| IP Address | Enter the IP address of external RADIUS server. |
| Port | The UDP port number that the external RADIUS server is using. The default value is 1812, based on RFC 2138. |
| Shared Secret | The external RADIUS server and client share a secret that is used to authenticate the messages sent between them. Both sides must be configured to use the same shared secret. |
| Session Timeout | Set the maximum time of service provided before re-authentication. Set to zero to perform another authentication immediately after the first authentication has successfully completed. (The unit is second.) |

After finishing this web page configuration, please click **OK** to save the settings.

3.8.3 Access Control

For additional security of wireless access, the **Access Control** facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. By clicking the **Access Control**, a new web page will appear, as depicted below, so that you could edit the clients' MAC addresses to control their access rights (deny or allow).

Wireless LAN (2.4GHz) >> Access Control

Available settings are explained as follows:

| Item | Description |
|-----------------------------|---|
| Policy | Select to enable any one of the following policy or disable the policy. Choose Activate MAC address filter to type in the MAC addresses for other clients in the network manually. Choose Blocked MAC address filter , so that all of the devices with the MAC addresses listed on the MAC Address Filter table will be blocked and cannot access into VigorAP 902. <div style="border: 1px solid black; padding: 2px; margin-top: 5px;"> Activate MAC address filter ▼ Disable Activate MAC address filter Blocked MAC address filter </div> |
| MAC Address Filter | Display all MAC addresses that are edited before. |
| Client's MAC Address | Manually enter the MAC address of wireless client. |
| Add | Add a new MAC address into the list. |
| Delete | Delete the selected MAC address in the list. |
| Edit | Edit the selected MAC address in the list. |
| Cancel | Give up the access control set up. |

| | |
|----------------|--|
| Backup | Click it to store the settings (MAC addresses on MAC Address Filter table) on this page as a file. |
| Restore | Click it to restore the settings (MAC addresses on MAC Address Filter table) from an existed file. |

After finishing this web page configuration, please click **OK** to save the settings.

3.8.4 WPS

Open **Wireless LAN>>WPS** to configure the corresponding settings.

Wireless LAN (2.4GHz) >> WPS (Wi-Fi Protected Setup)

Enable WPS

Wi-Fi Protected Setup Information

| | |
|------------------------|---------------------|
| WPS Configured | Yes |
| WPS SSID | DrayTek-LAN-A |
| WPS Auth Mode | Mixed(WPA+WPA2)/PSK |
| WPS Encryp Type | TKIP/AES |

Device Configure

| | |
|-------------------------------------|---|
| Configure via Push Button | <input type="button" value="Start PBC"/> |
| Configure via Client PinCode | <input type="text"/> <input type="button" value="Start PIN"/> |

Status: Not used

Note: WPS can help your wireless client automatically connect to the Access point.

: WPS is Disabled.

: WPS is Enabled.

: Waiting for WPS requests from wireless clients.

Available settings are explained as follows:

| Item | Description |
|-------------------------------------|---|
| Enable WPS | Check this box to enable WPS setting. |
| WPS Configured | Display related system information for WPS. If the wireless security (encryption) function of VigorAP 902 is properly configured, you can see 'Yes' message here. |
| WPS SSID | Display current selected SSID. |
| WPS Auth Mode | Display current authentication mode of the VigorAP 902r. Only WPA2/PSK and WPA/PSK support WPS. |
| WPS Encryp Type | Display encryption mode (None, WEP, TKIP, AES, etc.) of VigorAP 902. |
| Configure via Push Button | Click Start PBC to invoke Push-Button style WPS setup procedure. VigorAP 902 will wait for WPS requests from wireless clients about two minutes. Both ACT and 2.4G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes) |
| Configure via Client PinCode | Type the PIN code specified in wireless client you wish to connect, and click Start PIN button. Both ACT and 2.4G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes). |

3.8.5 Advanced Setting



This page is to determine which algorithm will be selected for wireless transmission rate.

Wireless LAN (2.4GHz) >> Advanced Setting

| | |
|--------------------------------|--|
| Channel Width | <input type="radio"/> 20 MHz <input checked="" type="radio"/> Auto 20/40 MHz <input type="radio"/> 40 MHz |
| Packet-OVERDRIVE™ Tx Burst | <input type="radio"/> Enable <input checked="" type="radio"/> Disable (For 11g mode only) |
| Antenna | <input checked="" type="radio"/> 2T2R <input type="radio"/> 1T1R |
| Tx Power | <input checked="" type="radio"/> 100% <input type="radio"/> 80% <input type="radio"/> 60% <input type="radio"/> 30% <input type="radio"/> 20% <input type="radio"/> 10% |
| Rate Adaptation Algorithm | <input checked="" type="radio"/> New <input type="radio"/> Old |
| Fragment Length (256 - 2346) | <input type="text" value="2346"/> bytes |
| RTS Threshold (1 - 2347) | <input type="text" value="2347"/> bytes |
| Country Code | <input type="text"/> (Reference) |
| Auto Channel Filtered Out List | <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 |
| Isolate 2.4GHz and 5GHz bands | <input checked="" type="radio"/> Enable <input type="radio"/> Disable |
| Isolate members with IP | <input type="radio"/> Enable <input checked="" type="radio"/> Disable |
| MAC Clone | <input type="radio"/> Enable <input checked="" type="radio"/> Disable <input type="text"/> |
| MAC Clone: | Set the MAC address of SSIDs and the Wireless client. Please notice that the last byte of this MAC address must be a multiple of 8. |

Available settings are explained as follows:

| Item | Description |
|-------------------------|---|
| Channel Width | <p>20 MHz- the AP will use 20MHz for data transmission and receiving between the AP and the stations.</p> <p>Auto 20/40 MHz- the AP will scan for nearby wireless AP, and then use 20MHz if the number of AP is more than 10, or use 40MHz if it's not.</p> <p>40 MHz- the AP will use 40MHz for data transmission and receiving between the AP and the stations.</p> |
| Packet-OVERDRIVE | <p>This feature can enhance the performance in data transmission about 40%* more (by checking Tx Burst). It is active only when both sides of Access Point and Station (in wireless client) invoke this function at the same time. That is, the wireless client must support this feature and invoke the function, too.</p> <p>Note: Vigor N61 wireless adapter supports this function. Therefore, you can use and install it into your PC for matching with Packet-OVERDRIVE (refer to the following picture of Vigor N61 wireless utility window, choose Enable for TxBURST on the tab of Option).</p> |
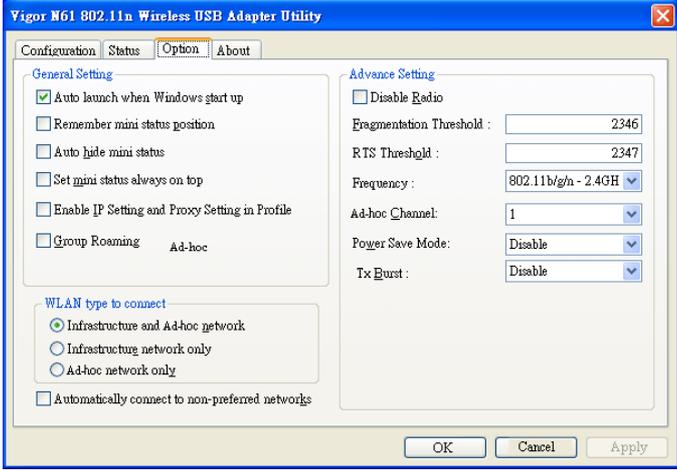
| | |
|--|--|
| |  |
| <p>Antenna</p> | <p>VigorAP can be attached with two antennas to have good data transmission via wireless connection. However, if you have only one antenna attached, please choose 1T1R.</p>  |
| <p>Tx Power</p> | <p>The default setting is the maximum (100%). Lowering down the value may degrade range and throughput of wireless.</p>  |
| <p>Rate Adaptation Algorithm</p> | <p>Wireless transmission rate is adapted dynamically. Usually, performance of “new” algorithm is better than “old”.</p> |
| <p>Fragment Length</p> | <p>Set the Fragment threshold of wireless radio. Do not modify default value if you don’t know what it is, default value is 2346.</p> |
| <p>RTS Threshold</p> | <p>Minimize the collision (unit is bytes) between hidden stations to improve wireless performance. Set the RTS threshold of wireless radio. Do not modify default value if you don’t know what it is, default value is 2347.</p> |
| <p>Country Code</p> | <p>VigorAP broadcasts country codes by following the 802.11d standard. However, some wireless stations will detect / scan the country code to prevent conflict occurred. If conflict is detected, wireless station will be warned and is unable to make network connection. Therefore, changing the country code to ensure successful network connection will be necessary for some clients.</p> |
| <p>Auto Channel Filtered Out List</p> | <p>The selected wireless channels will be discarded if AutoSelect is selected as Channel selection mode in Wireless LAN>>General Setup.</p> |
| <p>Isolate 2.4GHz and 5GHz bands</p> | <p>The default setting is “Enable”. It means that the wireless client using 2.4GHz band is unable to connect to the wireless</p> |

| | |
|--------------------------------|--|
| | <p>client with 5GHz band, and vice versa.</p> <p>For WLAN 2.4GHz and 5GHz set with the same SSID name:</p> <ul style="list-style-type: none"> ● No matter such function is enabled or disabled, clients using WLAN 2.4GHz and 5GHz can communicate for each other if Isolate Member (in Wireless LAN>>General Setup) is NOT enabled for such SSID. ● Yet, if the function of Isolate Member (in Wireless LAN>>General Setup) is enabled for such SSID, clients using WLAN 2.4GHz and 5GHz will be unable to communicate with each other. |
| Isolate members with IP | <p>The default setting is “Disable”.</p> <p>If it is enabled, VigorAP will isolate different wireless clients according to their IP address(es).</p> |
| MAC Clone | <p>Click Enable and manually enter the MAC address of the device with SSID 1. The MAC address of other SSIDs will change based on this MAC address.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.8.6 AP Discovery

VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. Based on the scanning result, users will know which channel is clean for usage. Also, it can be used to facilitate finding an AP for a WDS link. Notice that during the scanning process (about 5 seconds), no client is allowed to connect to Vigor.

This page is used to scan the existence of the APs on the wireless LAN. Yet, only the AP which is in the same channel of VigorAP 902 can be found. Please click **Scan** to discover all the connected APs.

Wireless LAN (2.4GHz) >> Access Point Discovery

Access Point List

Enable AP Monitor Mode

| Select | Index | SSID | BSSID | RSSI | Channel | Encryption | Authentication | Mode | Ch. Width | Last Detected |
|-----------------------|-------|---------------|-------------------|------|---------|------------|---------------------|---------|-----------|------------------|
| <input type="radio"/> | 1 | staffs_5F | 00:1d:aa:3d:af:d6 | 86% | 1 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 | Oct 21, 16:24:03 |
| <input type="radio"/> | 2 | Michael_2G | 00:1d:aa:fe:fa:58 | 39% | 11 | NONE | | 11b/g/n | 20 | Oct 21, 16:18:32 |
| <input type="radio"/> | 3 | RD2_Kyle_2... | 00:1d:aa:c3:3f:00 | 65% | 6 | NONE | | 11b/g/n | 40 | Oct 21, 16:24:03 |
| <input type="radio"/> | 4 | RD8_ACS_TE... | 00:1d:aa:f7:a9:00 | 24% | 6 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 | Oct 21, 16:24:03 |
| <input type="radio"/> | 5 | DrayTek-LA... | 00:50:7f:f0:d5:c0 | 5% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 | Oct 21, 16:24:03 |
| <input type="radio"/> | 6 | staffs_6F | 00:1d:aa:55:87:38 | 15% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 | Oct 21, 16:18:32 |
| <input type="radio"/> | 7 | staffs | 02:1d:aa:50:87:38 | 10% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 | Oct 21, 16:18:32 |
| <input type="radio"/> | 8 | guests | 02:1d:aa:51:87:38 | 39% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 | Oct 21, 16:24:03 |
| <input type="radio"/> | 9 | staffs | 02:1d:aa:9d:68:ac | 44% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 | Oct 21, 16:24:03 |
| <input type="radio"/> | 10 | guests | 0a:1d:aa:9d:68:ac | 44% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 | Oct 21, 16:24:03 |
| <input type="radio"/> | 35 | DrayTek | 00:1d:aa:74:da:38 | 20% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 | Oct 21, 16:18:32 |
| <input type="radio"/> | 36 | DrayTek | 00:1d:aa:74:da:38 | 20% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 | Oct 21, 16:24:03 |
| <input type="radio"/> | 37 | And-900-5G | 00:1d:aa:9d:0d:9c | 5% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 | Oct 21, 16:18:32 |
| <input type="radio"/> | 38 | V2862_RD2_... | 00:1d:aa:ea:38:a0 | 24% | 11 | WEP | | 11b/g | 20 | Oct 21, 16:18:32 |

See [Channel Statistics](#)

Note: During the scanning process (about 5 seconds), no station is allowed to connect with the AP.

AP's MAC Address

AP's SSID

Add to WDS Settings:

Each item is explained as follows:

| Item | Description |
|-------------------------------|--|
| Enable AP Monitor Mode | This function can help to get and keep the records of APs detected by such device after clicking Scan. In general, only the available AP will be detected by Vigor device. Once the AP is unavailable, it will be deleted from the Access Point List immediately. However, if such function is enabled, the system will keep the record of the AP (once detected by Vigor device) until it is available for Vigor device again. |
| SSID | Display the SSID of the AP scanned by VigorAP 902. |
| BSSID | Display the MAC address of the AP scanned by VigorAP 902. |
| RSSI | Display the signal strength of the access point. RSSI is the abbreviation of Received Signal Strength Indication. |
| Channel | Display the wireless channel used for the AP that is scanned by VigorAP 902. |
| Encryption | Display the encryption mode for the scanned AP. |
| Authentication Mode | Display the authentication type that the scanned AP applied. |
| Mode | Display the wireless connection mode that the scanned AP used. |
| Ch. Width | Display the channel width that the scanned AP used. |
| Scan | It is used to discover all the connected AP. The results will be shown on the box above this button |
| Channel Statistics | It displays the statistics for the channels used by APs. |
| AP's MAC Address | If you want the found AP applying the WDS settings, please type in the AP's MAC address. |
| AP's SSID | To specify an AP to be applied with WDS settings, you can specify MAC address or SSID for the AP. Here is the place that you can type the SSID of the AP. |
| Add | Click Repeater for the specified AP. Next, click Add . Later, the MAC address of the AP will be added and be shown on WDS settings page. |

3.8.7 WDS AP Status

VigorAP 902 can display the status such as MAC address, physical mode, power save and bandwidth for the working AP connected with WDS. Click **Refresh** to get the newest information.

Wireless LAN (2.4GHz) >> WDS AP Status

WDS AP List

| AID | MAC Address | 802.11 Physical Mode | Power Save | Bandwidth |
|-----|-------------------|----------------------|------------|-----------|
| 1 | 00:50:7F:C9:76:0C | CCK | OFF | 20M |

Refresh

3.8.8 WMM Configuration

WMM is an abbreviation of Wi-Fi Multimedia. It defines the priority levels for four access categories derived from 802.1d (prioritization tabs). The categories are designed with specific types of traffic, voice, video, best effort and low priority data. There are four accessing categories - AC_BE , AC_BK, AC_VI and AC_VO for WMM.

Wireless LAN (2.4GHz) >> WMM Configuration

WMM Configuration | [Set to Factory Default](#) |

WMM Capable Enable Disable
 APSD Capable Enable Disable

WMM Parameters of Access Point

| | Aifsn | CWMin | CWMax | Txop | ACM | AckPolicy |
|-------|-------|-------|-------|------|--------------------------|--------------------------|
| AC_BE | 3 | 15 | 63 | 0 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_BK | 7 | 15 | 1023 | 0 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_VI | 1 | 7 | 15 | 94 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_VO | 1 | 3 | 7 | 47 | <input type="checkbox"/> | <input type="checkbox"/> |

WMM Parameters of Station

| | Aifsn | CWMin | CWMax | Txop | ACM |
|-------|-------|-------|-------|------|--------------------------|
| AC_BE | 3 | 15 | 1023 | 0 | <input type="checkbox"/> |
| AC_BK | 7 | 15 | 1023 | 0 | <input type="checkbox"/> |
| AC_VI | 2 | 7 | 15 | 94 | <input type="checkbox"/> |
| AC_VO | 2 | 3 | 7 | 47 | <input type="checkbox"/> |

Available settings are explained as follows:

| Item | Description |
|---------------------|--|
| WMM Capable | To apply WMM parameters for wireless data transmission, please click the Enable radio button. |
| APSD Capable | APSD (automatic power-save delivery) is an enhancement over the power-save mechanisms supported by Wi-Fi networks. It allows devices to take more time in sleeping state and consume less power to improve the performance by minimizing transmission latency. The default setting is Disable . |
| Aifsn | It controls how long the client waits for each data transmission. Please specify the value ranging from 1 to 15. Such parameter will influence the time delay for WMM accessing categories. For the service of voice or video image, please set small value for AC_VI and AC_VO categories For the service of e-mail or web browsing, please set large value for AC_BE and AC_BK categories. |
| CWMin/CWMax | CWMin means contention Window-Min and CWMax means contention Window-Max. Please specify the value ranging from 1 to 15. Be aware that CWMax value must be greater than CWMin or equals to CWMin value. Both values will influence the time delay for WMM accessing categories. The difference between AC_VI and AC_VO categories must be smaller; however, the difference between AC_BE and AC_BK categories |

| | |
|------------------|--|
| | must be greater. |
| Txop | It means transmission opportunity. For WMM categories of AC_VI and AC_VO that need higher priorities in data transmission, please set greater value for them to get highest transmission opportunity. Specify the value ranging from 0 to 65535. |
| ACM | It is an abbreviation of Admission control Mandatory. It can restrict stations from using specific category class if it is checked. Note: VigorAP 902 provides standard WMM configuration in the web page. If you want to modify the parameters, please refer to the Wi-Fi WMM standard specification. |
| AckPolicy | “Uncheck” (default value) the box means the AP will answer the response request while transmitting WMM packets through wireless connection. It can assure that the peer must receive the WMM packets. “Check” the box means the AP will not answer any response request for the transmitting packets. It will have better performance with lower reliability. |

After finishing this web page configuration, please click **OK** to save the settings.

3.8.9 Bandwidth Management

The downstream or upstream from FTP, HTTP or some P2P applications will occupy large of bandwidth and affect the applications for other programs. Please use Bandwidth Management to make the bandwidth usage more efficient.

Wireless LAN (2.4GHz) >> Bandwidth Management

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|------------------------------------|-------------------------------------|--------|------------------------|
| SSID DrayTek-LAN-A | | | |
| Per Station Bandwidth Limit | | | |
| Enable | <input checked="" type="checkbox"/> | | |
| Upload Limit | User defined | K | bps (Default unit : K) |
| Download Limit | 64K | | bps |
| Auto Adjustment | <input checked="" type="checkbox"/> | | |
| Total Upload Limit | User defined | K | bps (Default unit : K) |
| Total Download Limit | 10M | | bps |

Note:
 1. Download : Traffic going to any station. Upload : Traffic being sent from a wireless station.
 2. Allow auto adjustment could make the best utilization of available bandwidth.

OK Cancel

Available settings are explained as follows:

| Item | Description |
|-----------------------------|---|
| SSID | Display the specific SSID name. |
| Enable | Check this box to enable the bandwidth management for clients. |
| Upload Limit | Define the maximum speed of the data uploading which will be used for the wireless stations connecting to VigorAP with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Download Limit | Define the maximum speed of the data downloading which will be used for the wireless station connecting to VigorAP with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Auto Adjustment | Check this box to have the bandwidth limit determined by the system automatically. |
| Total Upload Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data uploading. |
| Total Download Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data downloading. |

After finishing this web page configuration, please click **OK** to save the settings.

3.8.10 Airtime Fairness

Airtime fairness is essential in wireless networks that must support critical enterprise applications.

Most of the applications are either symmetric or require more downlink than uplink capacity; telephony and email send the same amount of data in each direction, while video streaming and web surfing involve more traffic sent from access points to clients than the other way around. This is essential for ensuring predictable performance and quality-of-service, as well as allowing 802.11n and legacy clients to coexist on the same network. Without airtime fairness, offices using mixed mode networks risk having legacy clients slow down the entire network or letting the fastest client(s) crowd out other users.


With airtime fairness, every client at a given quality-of-service level has equal access to the network's airtime.

The wireless channel can be accessed by only one wireless station at the same time.

The principle behind the IEEE802.11 channel access mechanisms is that each station has **equal probability** to access the channel. When wireless stations have similar data rate, this principle leads to a fair result. In this case, stations get similar channel access time which is called airtime.

However, when stations have various data rate (e.g., 11g, 11n), the result is not fair. The slow stations (11g) work in their slow data rate and occupy too much airtime, whereas the fast stations (11n) become much slower.

Take the following figure as an example, both Station A(11g) and Station B(11n) transmit data packets through VigorAP 902. Although they have equal probability to access the wireless channel, Station B(11n) gets only a little airtime and waits too much because Station A(11g) spends longer time to send one packet. In other words, Station B(fast rate) is obstructed by Station A(slow rate).

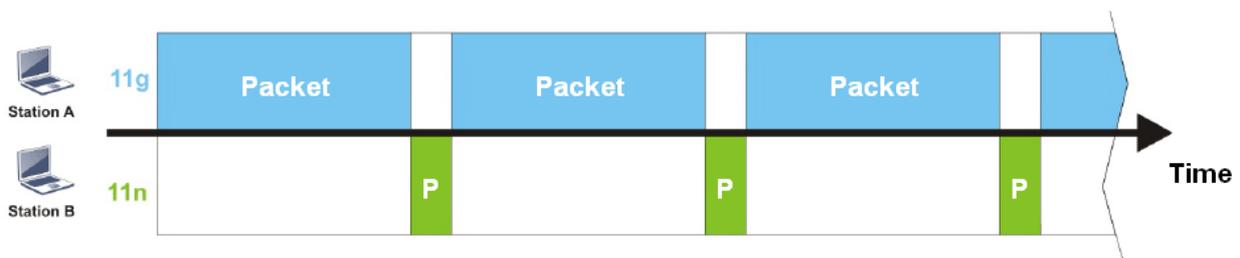

To improve this problem, Airtime Fairness is added for VigorAP 902. Airtime Fairness function tries to assign *similar airtime* to each station (A/B) by controlling TX traffic. In the following figure, Station B(11n) has higher probability to send data packets than Station A(11g). By this way, Station B(fast rate) gets fair airtime and it's speed is not limited by Station A(slow rate).



It is similar to automatic Bandwidth Limit. The dynamic bandwidth limit of each station depends on instant active station number and airtime assignment. Please note that Airtime Fairness of 2.4GHz and 5GHz are independent. But stations of different SSIDs function together, because they all use the same wireless channel. IN SPECIFIC ENVIRONMENTS, this function can reduce the bad influence of slow wireless devices and improve the overall wireless performance.

Suitable environment:


- (1) Many wireless stations.
- (2) All stations mainly use download traffic.
- (3) The performance bottleneck is wireless connection.

Wireless LAN (2.4GHz) >> Airtime Fairness

Enable **Airtime Fairness**
 Triggering Client Number (2 ~ 64, Default: 2)

Note: Please enable or disable this function according to the real situation and user experience. It is NOT suitable for all environments. You could check [Diagnostics >> Station Airtime](#) Graph first.

Available settings are explained as follows:
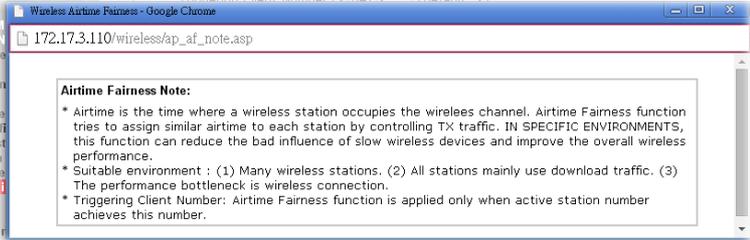
| Item | Description |
|--------------------------------|--|
| Enable Airtime Fairness | <p>Try to assign similar airtime to each wireless station by controlling TX traffic.</p> <p>Airtime Fairness – Click the link to display the following screen of airtime fairness note.</p>  <p>Triggering Client Number –Airtime Fairness function is applied only when active station number achieves this number.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

Note: Airtime Fairness function and Bandwidth Limit function should be mutually exclusive. So their webs have extra actions to ensure these two functions are not enabled simultaneously.

3.8.11 Station Control

Station Control is used to specify the duration for the wireless client to connect and reconnect VigorAP. If such function is not enabled, the wireless client can connect VigorAP until it shuts down.

Such feature is especially useful for free Wi-Fi service. For example, a coffee shop offers free Wi-Fi service for its guests for one hour every day. Then, the connection time can be set as “1 hour” and reconnection time can be set as “1 day”. Thus, the guest can finish his job within one hour and will not occupy the wireless network for a long time.

Note: Up to 300 Wireless Station records are supported by VigorAP.


Wireless LAN (2.4GHz) >> Station Control

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------------------------|--------|
| SSID | | DrayTek-LAN-A | |
| Enable | | <input type="checkbox"/> | |
| Connection Time | | 1 hour | |
| Reconnection Time | | 1 hour | |
| Display All Station Control List | | | |

Note: Once the feature is enabled, the connection time quota will apply to each wireless client (identified by MAC address).

OK Cancel

Available settings are explained as follows:
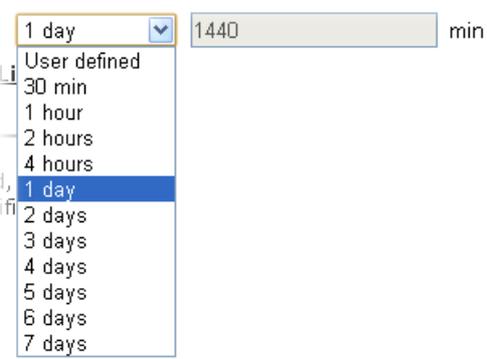
| Item | Description |
|--|--|
| SSID | Display the SSID that the wireless station will use it to connect with Vigor router. |
| Enable | Check the box to enable the station control function. |
| Connection Time / Reconnection Time | Use the drop down list to choose the duration for the wireless client connecting /reconnecting to Vigor router. Or, type the duration manually when you choose User defined .  |
| Display All Station Control List | All the wireless stations connecting to Vigor router by using such SSID will be listed on Station Control List. |

After finishing all the settings here, please click **OK** to save the configuration.

3.8.12 Roaming

The network signal for a single wireless access point might be limited by its coverage range. Therefore, if you want to expand the wireless network in a large exhibition with a quick method, you can install multiple access points with enabling the Roaming feature for each AP to reach the purpose of expanding wireless signals seamlessly.

These access points connecting for each other shall be verified by pre-authentication. This page allows you to enable the roaming feature and the pre-authentication.

Wireless LAN (2.4GHz) >> Roaming

AP-assisted Client Roaming Parameters

| | | |
|---|-----|--------------------------|
| <input type="checkbox"/> Minimum Basic Rate | 1 | Mbps |
| <input checked="" type="radio"/> Disable RSSI Requirement | | |
| <input checked="" type="radio"/> Strictly Minimum RSSI | -73 | dBm (42%) (Default: -73) |
| <input checked="" type="radio"/> Minimum RSSI | -66 | dBm (60%) (Default: -66) |
| with Adjacent AP RSSI over | 5 | dB (Default: 5) |

Fast Roaming(WPA2/802.1x)

| | |
|-----------------------------------|------------------------------------|
| <input type="checkbox"/> Enable | |
| PMK Caching : Cache Period | 10 minutes (10 ~ 600, Default: 10) |
| Pre-Authentication | |

OK Cancel

Available settings are explained as follows:


| Item | Description |
|--|---|
| AP-assisted Client Roaming Parameters | <p>When the link rate of wireless station is too low or the signal received by the wireless station is too worse, VigorAP 902 will automatically detect (based on the link rate and RSSI requirement) and cut off the network connection for that wireless station to assist it to connect another Wireless AP to get better signal.</p> <p>Minimum Basic Rate – Check the box to use the drop down list to specify a basic rate (Mbps). When the link rate of the wireless station is below such value, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Disable RSSI Requirement - If it is selected, VigorAP will not terminate the network connection based on RSSI.</p> <p>Strictly Minimum RSSI - VigorAP uses RSSI (received signal strength indicator) to decide to terminate the network connection of wireless station. When the signal strength is below the value (dBm) set here, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Minimum RSSI - When the signal strength of the wireless station is below the value (dBm) set here and adjacent AP (must be DrayTek AP and support such feature too) with higher signal strength value (defined in the field of With Adjacent AP RSSI over) is detected by VigorAP 902, VigorAP 902 will terminate the network connection for that wireless station. Later, the</p> |

| | |
|--|--|
| | <p>wireless station can connect to the adjacent AP (with better RSSI).</p> <ul style="list-style-type: none"> ● With Adjacent AP RSSI over – Specify a value as a threshold. |
| <p>Fast Roaming (WPA2/802.1x)</p> | <p>Enable – Check the box to enable fast roaming configuration.</p> <p>PMK Cache Period - Set the expire time of WPA2 PMK (Pairwise master key) cache. PMK Cache manages the list from the BSSIDs in the associated SSID with which it has pre-authenticated. Such feature is available for WPA2/802.1x mode.</p> <p>Pre-Authentication - Enables a station to authenticate to multiple APs for roaming securer and faster. With the pre-authentication procedure defined in IEEE 802.11i specification, the pre-four-way-handshake can reduce handoff delay perceivable by a mobile node. It makes roaming faster and more secure. (Only valid in WPA2)</p> <p>Enable - Enable IEEE 802.1X Pre-Authentication.</p> <p>Disable - Disable IEEE 802.1X Pre-Authentication.</p> |


After finishing this web page configuration, please click **OK** to save the settings.

3.8.13 Band Steering

Band Steering detects if the wireless clients are capable of 5GHz operation, and steers them to that frequency. It helps to leave 2.4GHz band available for legacy clients, and improves users experience by reducing channel utilization.

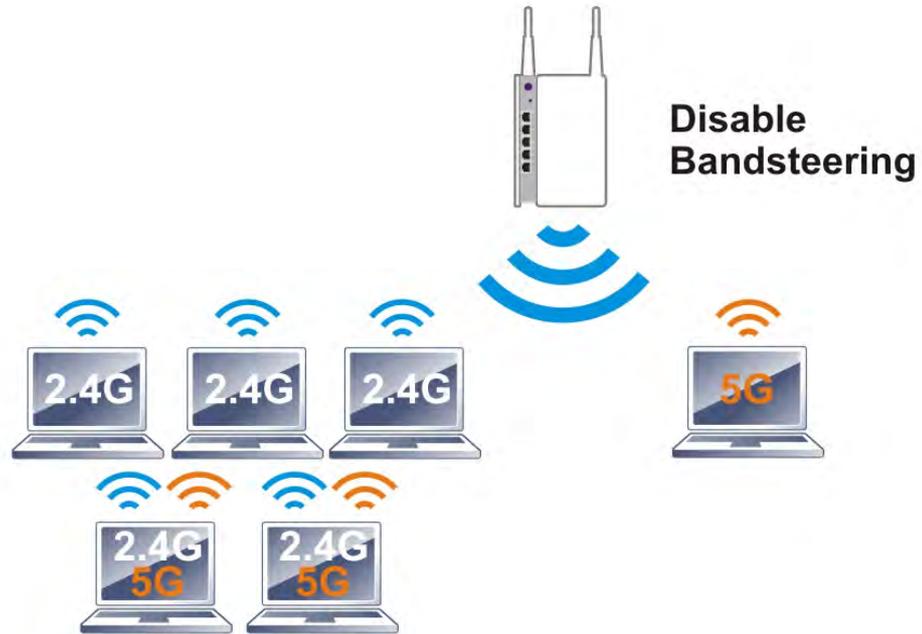

If dual-band is detected, the AP will let the wireless client connect to less congested wireless LAN, such as 5GHz to prevent from network congestion.

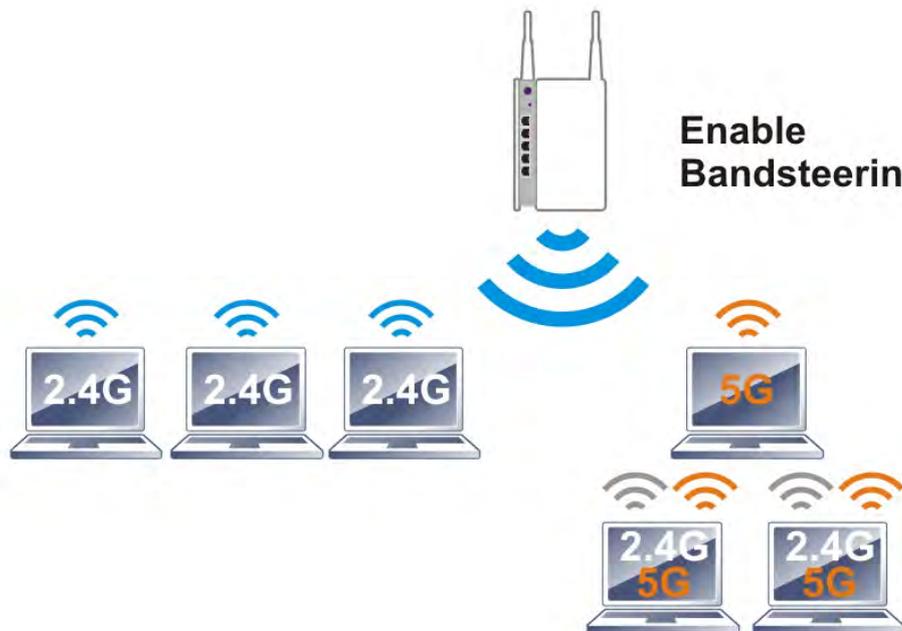

Note: To make Band Steering work successfully, SSID and security on 2.4GHz also MUST be broadcasted on 5GHz.

Open **Wireless LAN (2.4GHz)>>Band Steering** to get the following web page:

Wireless LAN (2.4GHz) >> Band Steering

Enable **Band Steering**
 Check Time for WLAN Client 5G Capability seconds (1 ~ 60, Default: 15)
 5GHz Minimum RSSI dBm (%) (Default: -78)
 (Only do band steering when 5GHz signal is better than Minimum RSSI)


Note: Please setup at least one pair of 2.4GHz and 5GHz Wireless LAN with the same SSID and security.

Available settings are explained as follows:

| Item | Description |
|-----------------------------|--|
| Enable Band Steering | <p>If it is enabled, VigorAP will detect if the wireless client is capable of dual-band or not within the time limit.</p> <p>Check Time.... – If the wireless station does not have the capability of 5GHz network connection, the system shall wait and check for several seconds (15 seconds, in default) to make the 2.4GHz network connection. Specify the time limit for VigorAP to detect the wireless client.</p> <p>5GHz Minimum RSSI – The wireless station has the capability of 5GHz network connection, yet the signal performance might not be satisfied. Therefore, when the signal strength is below the value set here while the wireless station connecting to VigorAP 902, VigorAP will allow the client to connect to 2.4GHz network.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

Below shows how Band Steering works.

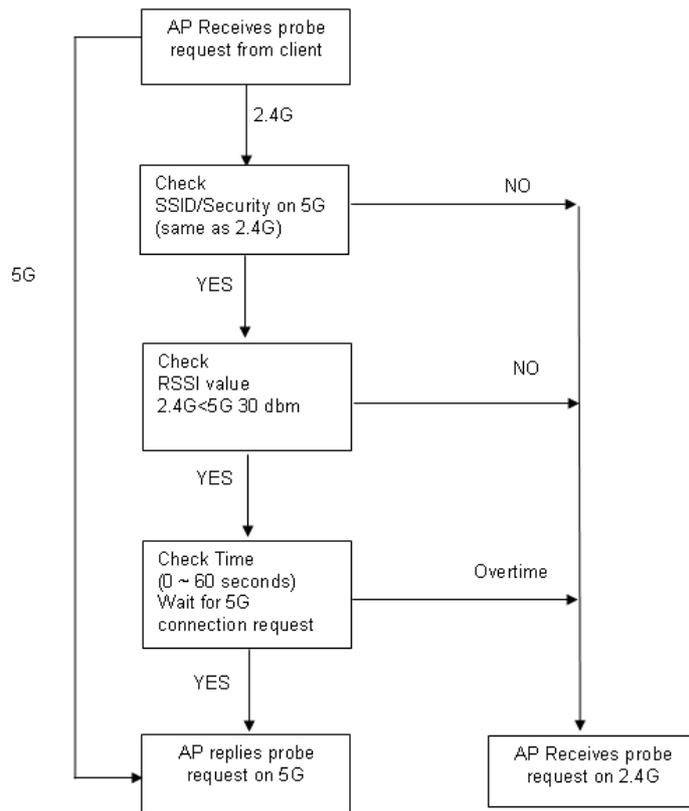

How to Use Band Steering?

1. Open **Wireless LAN(2.4GHz)>>Band Steering**.
2. Check the box of **Enable Band Steering** and use the default value (15) for check time setting.

Wireless LAN (2.4GHz) >> Band Steering

Enable **Band Steering**
Check Time for WLAN Client 5G Capability seconds (1 ~ 60, Default: 15)
 5GHz Minimum RSSI dBm (%) (Default: -78)
(Only do band steering when 5GHz signal is better than Minimum RSSI)

Note: Please setup at least one pair of 2.4GHz and 5GHz Wireless LAN with the same SSID and security.

3. Click **OK** to save the settings.
4. Open **Wireless LAN (2.4GHz)>>General Setup** and **Wireless LAN (5GHz)>>General Setup**. Configure SSID as *ap902-BandSteering* for both pages. Click **OK** to save the settings.

Wireless LAN (2.4GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN
 Enable Limit Client (3-64) (default: 64)

Mode :

| | Hide SSID | SSID | Isolate Member (0:Untagged) | VLAN ID | MAC Clone |
|---|--------------------------|---|-----------------------------|--------------------------------|--------------------------|
| 1 | <input type="checkbox"/> | <input type="text" value="ap902-BandSteering"/> | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |
| 2 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |
| 3 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |
| 4 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |

Hide SSID: Prevent SSID from being scanned.
Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.
MAC Clone: Set the MAC address of SSID 1. The MAC addresses of other SSIDs and the Wireless client will also change based on this MAC address. Please notice that the last byte of this MAC address must be a

Same value for 2.4GHz and 5GHz

Wireless LAN (5GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN
 Enable Limit Client (3-64) (default: 64)

Mode :

| | Hide SSID | SSID | Isolate Member | VLAN ID (0:Untagged) |
|---|--------------------------|---|--------------------------|--------------------------------|
| 1 | <input type="checkbox"/> | <input type="text" value="ap902-BandSteering"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 2 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 3 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 4 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> |

Hide SSID: Prevent SSID from being scanned.
Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.

Channel :
Details : 20MHz / 40MHz Ext Ch: 40 , 80MHz Center Ch: 42

- Open **Wireless LAN (2.4GHz)>>Security** and **Wireless LAN (5GHz)>>Security**. Configure Security as *12345678* for both pages. Click **OK** to save the settings.

Wireless LAN (2.4GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------|--------|
| SSID | | | |
| ap902-BandSteering | | | |
| Mode | | | |
| Mixed(WPA+WPA2)/PSK | | | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | | |
| <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | | | |
| Pass Phrase | | | |
| | | | |
| Key Renewal Interval | | | |
| 3600 seconds | | | |
| WEP | | | |
| <input type="radio"/> Key 1 : <input type="text"/> Hex ▾ | | | |
| <input type="radio"/> Key 2 : <input type="text"/> Hex ▾ | | | |
| <input type="radio"/> Key 3 : <input type="text"/> Hex ▾ | | | |
| <input type="radio"/> Key 4 : <input type="text"/> Hex ▾ | | | |
| 802.1x WEP | | | |
| <input type="radio"/> Disable <input type="radio"/> Enable | | | |

Same value for 2.4GHz and 5GHz

Wireless LAN (5GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------|--------|
| SSID | | | |
| ap902-BandSteering | | | |
| Mode | | | |
| Mixed(WPA+WPA2)/PSK | | | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | | |
| <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | | | |
| Pass Phrase | | | |
| | | | |
| Key Renewal Interval | | | |
| 3600 seconds | | | |
| PMK Cache Period | | | |
| 10 minutes | | | |
| Pre-Authentication | | | |
| <input checked="" type="radio"/> Disable <input type="radio"/> Enable | | | |
| WEP | | | |
| <input checked="" type="radio"/> Key 1 : <input type="text"/> Hex ▾ | | | |
| <input type="radio"/> Key 2 : <input type="text"/> Hex ▾ | | | |
| <input type="radio"/> Key 3 : <input type="text"/> Hex ▾ | | | |
| <input type="radio"/> Key 4 : <input type="text"/> Hex ▾ | | | |

- Now, VigorAP 902 will let the wireless clients connect to less congested wireless LAN, such as 5GHz to prevent from network congestion.

3.8.14 Station List

Station List provides the knowledge of connecting wireless clients now along with its status code.

General

Display general information (e.g., MAC Address, SSID, Auth, Encrypt, TX/RX Rate) for the station.

Wireless LAN (2.4GHz) >> Station List

Station List

| | | | | | | | General | Advanced | Control | Neighbor |
|-------|-------------------|----------|--------------|------------------|------|------------|---------|----------|---------|----------|
| Index | MAC Address | Vendor | RSSI | Approx. Distance | SSID | Visit Time | | | | |
| 1 | DA:A1:19:E2:65:AD | | 5% (-88dBm) | 141.25m | N/A | 0d:0h:▲ | | | | |
| 2 | 00:50:7F:F0:BD:2B | DrayTek | 52% (-69dBm) | 15.85m | N/A | 0d:0h: | | | | |
| 3 | 00:50:7F:37:6D:E5 | DrayTek | 47% (-71dBm) | 19.95m | N/A | 0d:0h: | | | | |
| 4 | 1C:4B:D6:8B:9C:00 | Azurewav | 18% (-83dBm) | 79.43m | N/A | 0d:1h: | | | | |
| 5 | 00:15:AF:A5:24:A0 | Azurewav | 26% (-79dBm) | 50.12m | N/A | 0d:0h: | | | | |
| 6 | B0:34:95:22:50:FD | Apple | 47% (-71dBm) | 19.95m | N/A | 0d:0h: | | | | |
| 7 | B4:52:7E:D6:68:9D | Sony | 20% (-82dBm) | 70.79m | N/A | 0d:0h: | | | | |
| 8 | 00:1F:3C:51:9C:55 | Intel | 39% (-74dBm) | 28.18m | N/A | 0d:1h:▼ | | | | |

Add to Access Control :

Client's MAC Address : : : : : :

Note:

1. Approx. Distance is calculated by actual signal strength of device detected. Inaccuracy might occur based on barrier encountered.
2. Due to the differences in signal strength for different devices, the calculated value of approximate distance also might be different.
3. Trademarks and brand names are the properties of their respective owners.

Available settings are explained as follows:

| Item | Description |
|------------------------------|---|
| MAC Address | Display the MAC Address for the connecting client. |
| Hostname | Display the host name of the connecting client. |
| SSID | Display the SSID that the wireless client connects to. |
| Auth | Display the authentication that the wireless client uses for connection with such AP. |
| Encrypt | Display the encryption mode used by the wireless client. |
| Tx Rate/Rx Rate | Display the transmission /receiving rate for packets. |
| Refresh | Click this button to refresh the status of station list. |
| Add to Access Control | Client's MAC Address - For additional security of wireless access, the Access Control facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. |
| Add | Click this button to add current typed MAC address into Access Control . |

Advanced

Display more information (e.g., AID, PSM, WMM, RSSI PhMd, BW, MCS, Rate) for the station.

Control


Display connection and reconnection time of the wireless stations.

Neighbor

Display more information for the neighboring wireless stations.

3.9 Wireless LAN (2.4GHz) Settings for Universal Repeater Mode

When you choose Universal Repeater as the operation mode, the Wireless LAN menu items will include General Setup, Security, Access Control, WPS, Advanced Setting, AP Discovery, Universal Repeater, WMM Configuration, Bandwidth Management, Airtime Fairness, Station Control, Roaming, Band Steering and Station List.

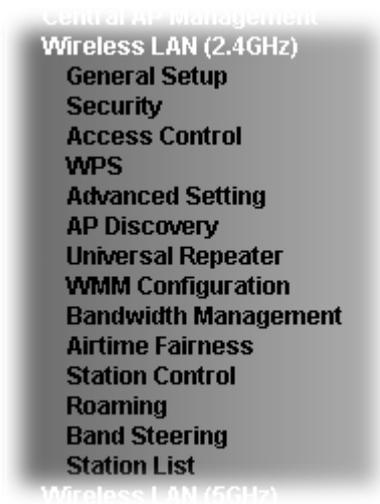

3.9.1 General Setup

By clicking the **General Setup**, a new web page will appear so that you could configure the SSID and the wireless channel.

Please refer to the following figure for more information.

Wireless LAN (2.4GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Client Limit (3 ~ 64, default: 64)

Enable Client Limit per SSID (3 ~ 64, default: 64)

Mode : ▼

Channel : ▼


Extension Channel : ▼

Enable 2 Subnet (Simulate 2 APs)

| | Enable | Hide SSID | SSID | Subnet | Isolate LAN | Isolate Member | VLAN ID (0:Untagged) |
|---|--------------------------|--------------------------|--|--------------------------------------|--------------------------|--------------------------|--------------------------------|
| 1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="MK-902-mamie"/> | <input type="text" value="LAN-A"/> ▼ | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="DrayTek-LAN-B"/> | <input type="text" value="LAN-A"/> ▼ | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 3 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text"/> | <input type="text" value="LAN-A"/> ▼ | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 4 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text"/> | <input type="text" value="LAN-A"/> ▼ | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |

Hide SSID: Prevent SSID from being scanned.
Isolate LAN: Wireless clients (stations) with the same SSID cannot access wired PCs on LAN.
Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.

Available settings are explained as follows:
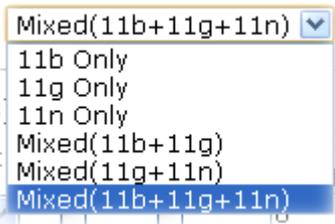
| Item | Description |
|-------------------------------------|---|
| Enable Wireless LAN | Check the box to enable wireless function. |
| Enable Client Limit | Check the box to set the maximum number of wireless stations which try to connect Internet through VigorAP. The number you can set is from 3 to 64. |
| Enable Client Limit per SSID | Define the maximum number of wireless stations per SSID which try to connect to Internet through Vigor device. The number you can set is from 3 to 64. |
| Mode | At present, VigorAP 902 can connect to 11b only, 11g only, 11n only, Mixed (11b+11g), Mixed (11g+11n) and Mixed (11b+11g+11n) stations simultaneously. Simply choose Mixed (11b+11g+11n) mode.  |

| | |
|---|--|
| Channel | Means the channel of frequency of the wireless LAN. You may switch channel if the selected channel is under serious interference. If you have no idea of choosing the frequency, please select AutoSelect to let system determine for you. |
| Rate | If you choose 11g Only or 11b Only, such feature will be available for you to set data transmission rate. |
| Extension Channel | With 802.11n, there is one option to double the bandwidth per channel. The available extension channel options will be varied according to the Channel selected above. Configure the extension channel you want. |
| Enable 2 Subnet (Simulate 2 APs) | <p>Check the box to enable the function for two independent subnets. Once you enable this function, LAN-A and LAN-B would be independent. Next, you can connect one router in LAN-A, and another router in LAN-B. Such mechanism can make you feeling that you have two independent AP/subnet functions in one VigorAP 902.</p> <p>If you disable this function, LAN-A and LAN-B ports are in the same domain. You could only connect one router (no matter connecting to LAN-A or LAN-B) in this environment.</p> |
| Hide SSID | Check it to prevent from wireless sniffing and make it harder for unauthorized clients or STAs to join your wireless LAN. Depending on the wireless utility, the user may only see the information except SSID or just cannot see any thing about VigorAP 902 while site surveying. The system allows you to set four sets of SSID for different usage. |
| SSID | Set a name for VigorAP 902 to be identified. Default settings are DrayTek-LAN-A and DrayTek-LAN-B. When Enable 2 Subnet is enabled, you can specify subnet interface (LAN-A or LAN-B) for each SSID by using the drop down menu. |
| Subnet | Choose LAN-A or LAN-B for each SSID. If you choose LAN-A, the wireless clients connecting to this SSID could only communicate with LAN-A. |
| Isolate LAN | Check this box to make the wireless clients (stations) with the same SSID not accessing for wired PC in LAN. |
| Isolate Member | Check this box to make the wireless clients (stations) with the same SSID not accessing for each other. |
| VLAN ID | <p>Type the value for such SSID. Packets transferred from such SSID to LAN will be tagged with the number.</p> <p>If your network uses VLANs, you can assign the SSID to a VLAN on your network. Client devices that associate using the SSID are grouped into this VLAN. The VLAN ID range is from 3 to 4095. The VLAN ID is 0 by default, it means disabling the VLAN function for the SSID.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.9.2 Security


This page allows you to set security with different modes for SSID 1, 2, 3 and 4 respectively. After configuring the correct settings, please click **OK** to save and invoke it.


By clicking the **Security Settings**, a new web page will appear so that you could configure the settings.

Wireless LAN (2.4GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|---|----------------------|--|--------------------------------------|
| SSID | | MK-902-mamie | |
| Mode | | Mixed(WPA+WPA2)/PSK | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | |
| Pass Phrase | | <input type="text" value="....."/> | |
| Key Renewal Interval | | <input type="text" value="3600"/> seconds | |
| EAPOL Key Retry | | <input checked="" type="radio"/> Enable <input type="radio"/> Disable | |
| WEP | | | |
| <input checked="" type="radio"/> Key 1 : | <input type="text"/> | <input type="text"/> | Hex <input type="button" value="v"/> |
| <input type="radio"/> Key 2 : | <input type="text"/> | <input type="text"/> | Hex <input type="button" value="v"/> |
| <input type="radio"/> Key 3 : | <input type="text"/> | <input type="text"/> | Hex <input type="button" value="v"/> |
| <input type="radio"/> Key 4 : | <input type="text"/> | <input type="text"/> | Hex <input type="button" value="v"/> |
| 802.1x WEP | | <input type="radio"/> Disable <input type="radio"/> Enable | |
| <input type="button" value="OK"/> | | <input type="button" value="Cancel"/> | |

Available settings are explained as follows:
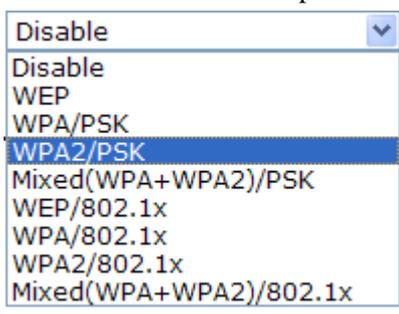
| Item | Description |
|-------------|--|
| Mode | <p>There are several modes provided for you to choose.</p>  <p>Disable - The encryption mechanism is turned off.</p> <p>WEP - Accepts only WEP clients and the encryption key should be entered in WEP Key.</p> <p>WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK - Accepts only WPA clients and the encryption key should be entered in PSK. The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WEP/802.1x - The built-in RADIUS client feature enables VigorAP 902 to assist the remote dial-in user or a wireless station and the RADIUS server in performing mutual</p> |

| | |
|-----------------------------|--|
| | <p>authentication. It enables centralized remote access authentication for network management.</p> <p>The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication. Select WPA, WPA2 or Auto as WPA mode.</p> <p>WPA/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WPA2/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> |
| WPA Algorithms | Select TKIP, AES or TKIP/AES as the algorithm for WPA. Such feature is available for WPA2/802.1x, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Pass Phrase | Type 8-63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). Such feature is available for WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Key Renewal Interval | WPA uses shared key for authentication to the network. However, normal network operations use a different encryption key that is randomly generated. This randomly generated key that is periodically replaced. Enter the renewal security time (seconds) in the column. Smaller interval leads to greater security but lower performance. Default is 3600 seconds. Set 0 to disable re-key. Such feature is available for WPA2/802.1, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| EAPOL Key Retry | EAPOL means Extensible Authentication Protocol over LAN. Click Enable to make sure that the key will be installed and used once in order to prevent key reinstallation attack. |
| Key 1 – Key 4 | <p>Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(~) except '#' and ','. Such feature is available for WEP mode.</p>  |
| 802.1x WEP | <p>Disable - Disable the WEP Encryption. Data sent to the AP will not be encrypted.</p> <p>Enable - Enable the WEP Encryption.</p> <p>Such feature is available for WEP/802.1x mode.</p> |

Click the link of **RADIUS Server** to access into the following page for more settings.

Radius Server

Use internal RADIUS Server

IP Address

Port

Shared Secret

Session Timeout second(s)

Available settings are explained as follows:

| Item | Description |
|-----------------------------------|--|
| Use internal RADIUS Server | There is a RADIUS server built in VigorAP 902 which is used to authenticate the wireless client connecting to the access point. Check this box to use the internal RADIUS server for wireless security. Besides, if you want to use the external RADIUS server for authentication, do not check this box. Please refer to the section, 3.13 RADIUS Server to configure settings for internal server of VigorAP 902. |
| IP Address | Enter the IP address of external RADIUS server. |
| Port | The UDP port number that the external RADIUS server is using. The default value is 1812, based on RFC 2138. |
| Shared Secret | The external RADIUS server and client share a secret that is used to authenticate the messages sent between them. Both sides must be configured to use the same shared secret. |
| Session Timeout | Set the maximum time of service provided before re-authentication. Set to zero to perform another authentication immediately after the first authentication has successfully completed. (The unit is second.) |

After finishing this web page configuration, please click **OK** to save the settings.

3.9.3 Access Control

For additional security of wireless access, the **Access Control** facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. By clicking the **Access Control**, a new web page will appear, as depicted below, so that you could edit the clients' MAC addresses to control their access rights (deny or allow).

Wireless LAN (2.4GHz) >> Access Control

SSID 1 | SSID 2 | SSID 3 | SSID 4

SSID: DrayTek-LAN-A
Policy: Disable

MAC Address Filter

| Index | MAC Address |
|-------|-------------|
| | |

Client's MAC Address : : : : : :

Add Delete Edit Cancel Limit:256 entries

OK Cancel

Backup ACL Cfg : Backup Upload From File: Select... Restore

Available settings are explained as follows:

| Item | Description |
|-----------------------------|---|
| Policy | Select to enable any one of the following policy or disable the policy. Choose Activate MAC address filter to type in the MAC addresses for other clients in the network manually. Choose Blocked MAC address filter , so that all of the devices with the MAC addresses listed on the MAC Address Filter table will be blocked and cannot access into VigorAP 902. <div style="border: 1px solid black; padding: 2px;"> Activate MAC address filter ▼ Disable Activate MAC address filter Blocked MAC address filter </div> |
| MAC Address Filter | Display all MAC addresses that are edited before. |
| Client's MAC Address | Manually enter the MAC address of wireless client. |
| Add | Add a new MAC address into the list. |
| Delete | Delete the selected MAC address in the list. |
| Edit | Edit the selected MAC address in the list. |
| Cancel | Give up the access control set up. |

| | |
|----------------|--|
| Backup | Click it to store the settings (MAC addresses on MAC Address Filter table) on this page as a file. |
| Restore | Click it to restore the settings (MAC addresses on MAC Address Filter table) from an existed file. |

After finishing this web page configuration, please click **OK** to save the settings.

3.9.4 WPS

Open **Wireless LAN>>WPS** to configure the corresponding settings.

Wireless LAN (2.4GHz) >> WPS (Wi-Fi Protected Setup)

Enable WPS 

Wi-Fi Protected Setup Information

| | |
|------------------------|---------------------|
| WPS Configured | Yes |
| WPS SSID | DrayTek-LAN-A |
| WPS Auth Mode | Mixed(WPA+WPA2)/PSK |
| WPS Encryp Type | TKIP/AES |

Device Configure

| | |
|-------------------------------------|---|
| Configure via Push Button | <input type="button" value="Start PBC"/> |
| Configure via Client PinCode | <input type="text"/> <input type="button" value="Start PIN"/> |

Status: Idle

Note: WPS can help your wireless client automatically connect to the Access point.

: WPS is Disabled.

: WPS is Enabled.

: Waiting for WPS requests from wireless clients.

Available settings are explained as follows:

| Item | Description |
|-------------------------------------|---|
| Enable WPS | Check this box to enable WPS setting. |
| WPS Configured | Display related system information for WPS. If the wireless security (encryption) function of VigorAP 902 is properly configured, you can see 'Yes' message here. |
| WPS SSID | Display current selected SSID. |
| WPS Auth Mode | Display current authentication mode of the VigorAP 902. Only WPA2/PSK and WPA/PSK support WPS. |
| WPS Encryp Type | Display encryption mode (None, WEP, TKIP, AES, etc.) of VigorAP 902. |
| Configure via Push Button | Click Start PBC to invoke Push-Button style WPS setup procedure. VigorAP 902 will wait for WPS requests from wireless clients about two minutes. Both ACT and 2.4G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes) |
| Configure via Client PinCode | Type the PIN code specified in wireless client you wish to connect, and click Start PIN button. Both ACT and 2.4G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes). |

3.9.5 Advanced Setting



This page is to determine which algorithm will be selected for wireless transmission rate.

Wireless LAN (2.4GHz) >> Advanced Setting

| | |
|--------------------------------|--|
| Channel Width | <input type="radio"/> 20 MHz <input checked="" type="radio"/> Auto 20/40 MHz <input type="radio"/> 40 MHz |
| Packet-OVERDRIVE™ Tx Burst | <input type="radio"/> Enable <input checked="" type="radio"/> Disable (For 11g mode only) |
| Antenna | <input checked="" type="radio"/> 2T2R <input type="radio"/> 1T1R |
| Tx Power | <input checked="" type="radio"/> 100% <input type="radio"/> 80% <input type="radio"/> 60% <input type="radio"/> 30% <input type="radio"/> 20% <input type="radio"/> 10% |
| Rate Adaptation Algorithm | <input checked="" type="radio"/> New <input type="radio"/> Old |
| Fragment Length (256 - 2346) | <input type="text" value="2346"/> bytes |
| RTS Threshold (1 - 2347) | <input type="text" value="2347"/> bytes |
| Country Code | <input type="text"/> (Reference) |
| Auto Channel Filtered Out List | <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 |
| Isolate 2.4GHz and 5GHz bands | <input checked="" type="radio"/> Enable <input type="radio"/> Disable |
| Isolate members with IP | <input type="radio"/> Enable <input checked="" type="radio"/> Disable |
| MAC Clone | <input type="radio"/> Enable <input checked="" type="radio"/> Disable <input type="text"/> |
| MAC Clone: | Set the MAC address of SSIDs and the Wireless client. Please notice that the last byte of this MAC address must be a multiple of 8. |

Available settings are explained as follows:

| Item | Description |
|-------------------------|---|
| Channel Width | <p>20 MHz- the AP will use 20MHz for data transmission and receiving between the AP and the stations.</p> <p>Auto 20/40 MHz- the AP will scan for nearby wireless AP, and then use 20MHz if the number of AP is more than 10, or use 40MHz if it's not.</p> <p>40 MHz- the AP will use 40MHz for data transmission and receiving between the AP and the stations.</p> |
| Packet-OVERDRIVE | <p>This feature can enhance the performance in data transmission about 40%* more (by checking Tx Burst). It is active only when both sides of Access Point and Station (in wireless client) invoke this function at the same time. That is, the wireless client must support this feature and invoke the function, too.</p> <p>Note: Vigor N61 wireless adapter supports this function. Therefore, you can use and install it into your PC for matching with Packet-OVERDRIVE (refer to the following picture of Vigor N61 wireless utility window, choose Enable for TxBURST on the tab of Option).</p> |
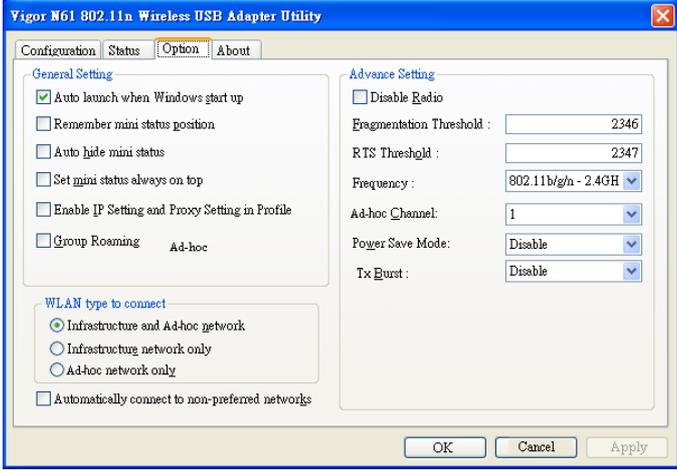
| | |
|--|--|
| |  |
| <p>Antenna</p> | <p>VigorAP can be attached with two antennas to have good data transmission via wireless connection. However, if you have only one antenna attached, please choose 1T1R.</p>  |
| <p>Tx Power</p> | <p>The default setting is the maximum (100%). Lowering down the value may degrade range and throughput of wireless.</p>  |
| <p>Rate Adaptation Algorithm</p> | <p>Wireless transmission rate is adapted dynamically. Usually, performance of “new” algorithm is better than “old”.</p> |
| <p>Fragment Length</p> | <p>Set the Fragment threshold of wireless radio. Do not modify default value if you don’t know what it is, default value is 2346.</p> |
| <p>RTS Threshold</p> | <p>Minimize the collision (unit is bytes) between hidden stations to improve wireless performance. Set the RTS threshold of wireless radio. Do not modify default value if you don’t know what it is, default value is 2347.</p> |
| <p>Country Code</p> | <p>VigorAP broadcasts country codes by following the 802.11d standard. However, some wireless stations will detect / scan the country code to prevent conflict occurred. If conflict is detected, wireless station will be warned and is unable to make network connection. Therefore, changing the country code to ensure successful network connection will be necessary for some clients.</p> |
| <p>Auto Channel Filtered Out List</p> | <p>The selected wireless channels will be discarded if AutoSelect is selected as Channel selection mode in Wireless LAN>>General Setup.</p> |
| <p>Isolate 2.4GHz and 5GHz bands</p> | <p>The default setting is “Enable”. It means that the wireless client using 2.4GHz band is unable to connect to the wireless</p> |

| | |
|--------------------------------|--|
| | <p>client with 5GHz band, and vice versa.</p> <p>For WLAN 2.4GHz and 5GHz set with the same SSID name:</p> <ul style="list-style-type: none"> ● No matter such function is enabled or disabled, clients using WLAN 2.4GHz and 5GHz can communicate for each other if Isolate Member (in Wireless LAN>>General Setup) is NOT enabled for such SSID. ● Yet, if the function of Isolate Member (in Wireless LAN>>General Setup) is enabled for such SSID, clients using WLAN 2.4GHz and 5GHz will be unable to communicate with each other. |
| Isolate members with IP | <p>The default setting is “Disable”.</p> <p>If it is enabled, VigorAP will isolate different wireless clients according to their IP address(es).</p> |
| MAC Clone | <p>Click Enable and manually enter the MAC address of the device with SSID 1. The MAC address of other SSIDs will change based on this MAC address.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.9.6 AP Discovery

VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. Based on the scanning result, users will know which channel is clean for usage. Also, it can be used to facilitate finding an AP for a WDS link. Notice that during the scanning process (about 5 seconds), no client is allowed to connect to Vigor.

This page is used to scan the existence of the APs on the wireless LAN. Yet, only the AP which is in the same channel of VigorAP 902 can be found. Please click **Scan** to discover all the connected APs.

Wireless LAN (2.4GHz) >> Access Point Discovery

Access Point List

Enable AP Monitor Mode

| Select | Index | SSID | BSSID | RSSI | Channel | Encryption | Authentication | Mode | Ch. Width |
|-----------------------|-------|---------------|-------------------|------|---------|------------|---------------------|---------|-----------|
| <input type="radio"/> | 1 | staffs | 02:1d:aa:9c:f6:44 | 5% | 6 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 2 | guests | 06:1d:aa:9c:f6:44 | 0% | 6 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 3 | RD8_24G_wi... | 00:1d:aa:5b:a0:c8 | 29% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 4 | staffs_4F | 00:1d:aa:f8:c8:a8 | 34% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 5 | staffs | 02:1d:aa:f8:c8:a8 | 39% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 6 | gusets | 02:1d:aa:f9:c8:a8 | 34% | 8 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 7 | 910c-james... | 00:1d:aa:7f:5d:9c | 5% | 9 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 8 | Draytek | 00:1d:aa:7f:5d:8c | 15% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 9 | Vigor2925-... | 00:1d:aa:b3:85:c8 | 29% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 10 | AP910C-PQC... | 00:1d:aa:26:8d:30 | 24% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 11 | 2860 PQC k... | 00:1d:aa:85:ba:d0 | 5% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 20 |
| <input type="radio"/> | 12 | V3220n 2.4... | 02:1d:aa:f0:0a:68 | 5% | 11 | NONE | | 11b/g/n | 40 |
| <input type="radio"/> | 13 | V2860-Tang... | 00:1d:aa:be:fc:d0 | 44% | 11 | NONE | | 11b/g/n | 20 |
| <input type="radio"/> | 14 | RD8-Eric-A... | 00:1d:aa:7f:5d:58 | 24% | 11 | WEP | | 11b/g | 20 |
| <input type="radio"/> | 15 | AP800-FREE... | 00:1d:aa:2e:59:28 | 5% | 11 | TKIP/AES | WPA2 | 11b/g/n | 40 |
| <input type="radio"/> | 16 | AP800-Inte... | 00:1d:aa:2e:59:29 | 10% | 11 | TKIP/AES | WPA2 | 11b/g/n | 40 |
| <input type="radio"/> | 17 | AP800-WPA2 | 00:1d:aa:2e:59:2a | 5% | 11 | AES | WPA2/PSK | 11b/g/n | 40 |
| <input type="radio"/> | 18 | AP800-Rout... | 00:1d:aa:2e:59:2b | 10% | 11 | AES | WPA2 | 11b/g/n | 40 |
| <input type="radio"/> | 19 | DrayTek-LA... | 00:50:7f:52:2f:59 | 15% | 11 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11b/g/n | 40 |
| <input type="radio"/> | 20 | FAE-902-Ex... | 00:1d:aa:3d:98:08 | 5% | 11 | AES | WPA2 | 11b/g/n | 40 |

See [Channel Interference](#)

Note: During the scanning process (about 5 seconds), no station is allowed to connect with the AP.

AP's MAC Address

AP's SSID

Select as **Universal Repeater:**

Each item is explained as follows:

| Item | Description |
|-------------------------------|--|
| Enable AP Monitor Mode | This function can help to get and keep the records of APs detected by such device after clicking Scan. In general, only the available AP will be detected by Vigor device. Once the AP is unavailable, it will be deleted from the Access Point List immediately. However, if such function is enabled, the system will keep the record of the AP (once detected by Vigor device) until it is available for Vigor device again. |
| SSID | Display the SSID of the AP scanned by VigorAP 902. |
| BSSID | Display the MAC address of the AP scanned by VigorAP 902. |
| RSSI | Display the signal strength of the access point. RSSI is the abbreviation of Received Signal Strength Indication. |
| Channel | Display the wireless channel used for the AP that is scanned by VigorAP 902. |
| Encryption | Display the encryption mode for the scanned AP. |
| Authentication | Display the authentication type that the scanned AP applied. |
| Mode | Display the wireless connection mode that the scanned AP |

| | |
|-------------------------------------|---|
| | used. |
| Ch. Width | Display the channel width that the scanned AP used. |
| Scan | It is used to discover all the connected AP. The results will be shown on the box above this button |
| Channel Interference | Access into Diagnostics>>Interference Monitor for viewing interference status for channel(s). |
| AP's MAC Address | If you want the found AP applying the WDS settings, please type in the AP's MAC address. |
| AP's SSID | To specify an AP to be applied with WDS settings, you can specify MAC address or SSID for the AP. Here is the place that you can type the SSID of the AP. |
| Select as Universal Repeater | In Universal Repeater mode, WAN would work as station mode and the wireless AP can be selected as a universal repeater. Choose one of the wireless APs from the Scan list. |

After finishing this web page configuration, please click **OK** to save the settings.

3.9.7 Universal Repeater

The access point can act as a wireless repeater; it can be Station and AP at the same time. It can use Station function to connect to a Root AP and use AP function to serve all wireless stations within its coverage.

Note: While using **Universal Repeater** mode, the access point will demodulate the received signal. Please check if this signal is noise for the operating network, then have the signal modulated and amplified again. The output power of this mode is the same as that of WDS and normal AP mode.

Wireless LAN (2.4GHz) >> Universal Repeater

Universal Repeater Parameters

| | |
|--|----------------------------|
| SSID | <input type="text"/> |
| MAC Address (Optional) | <input type="text"/> |
| Channel | 2462MHz (Channel 11) ▾ |
| Security Mode | Open ▾ |
| Encryption Type | None ▾ |
| WEP Keys | |
| <input checked="" type="radio"/> Key 1 : | <input type="text"/> Hex ▾ |
| <input type="radio"/> Key 2 : | <input type="text"/> Hex ▾ |
| <input type="radio"/> Key 3 : | <input type="text"/> Hex ▾ |
| <input type="radio"/> Key 4 : | <input type="text"/> Hex ▾ |




Note: If Channel is modified, the Channel setting of AP would also be changed.

Universal Repeater IP Configuration

| | |
|-----------------|--------|
| Connection Type | DHCP ▾ |
| Device Name | AP902 |

Available settings are explained as follows:

| Item | Description |
|--------------------------------------|---|
| Universal Repeater Parameters | |
| SSID | Set the name of access point that VigorAP 902 wants to connect to. |
| MAC Address (Optional) | Type the MAC address of access point that VigorAP 902 wants to connect to. |
| Channel | Means the channel of frequency of the wireless LAN. The default channel is 11. You may switch channel if the selected channel is under serious interference. If you have no idea of choosing the frequency, please select AutoSelect to let system determine for you. |
| Security Mode | There are several modes provided for you to choose. Each mode will bring up different parameters (e.g., WEP keys, Pass Phrase) for you to configure. <div style="border: 1px solid black; padding: 2px; width: fit-content;"> Open ▾ Open Shared WPA/PSK WPA2/PSK </div> |

| | |
|---|---|
| Encryption Type for Open/Shared | <p>This option is available when Open/Shared is selected as Security Mode.</p> <p>Choose None to disable the WEP Encryption. Data sent to the AP will not be encrypted. To enable WEP encryption for data transmission, please choose WEP.</p>  <p>WEP Keys - Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(~) except '#' and ','.</p>  |
| Encryption Type for WPA/PSK and WPA2/PSK | <p>This option is available when WPA/PSK or WPA2/PSK is selected as Security Mode.</p> <p>Select TKIP or AES as the algorithm for WPA.</p>  |
| Pass Phrase | <p>Either 8~63 ASCII characters, such as 012345678 (or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde...").</p> |
| Universal Repeater IP Configuration | |
| Connection Type | <p>Choose DHCP or Static IP as the connection mode.</p> <p>DHCP – The wireless station will be assigned with an IP from VigorAP.</p> <p>Static IP – The wireless station shall specify a static IP for connecting to Internet via VigorAP.</p>  |
| Device Name | <p>This setting is available when DHCP is selected as Connection Type.</p> <p>Type a name for the router as identification. Simply use the default name.</p> |
| IP Address | <p>This setting is available when Static IP is selected as Connection Type.</p> <p>Type an IP address with the same network segment of the LAN</p> |

| | |
|------------------------|--|
| | IP setting of the router. Such IP shall be different with any IP address in LAN. |
| Subnet Mask | This setting is available when Static IP is selected as Connection Type . Type the subnet mask setting which shall be the same as the one configured in LAN for the router. |
| Default Gateway | This setting is available when Static IP is selected as Connection Type . Type the gateway setting which shall be the same as the default gateway configured in LAN for the router. |

After finishing this web page configuration, please click **OK** to save the settings.

3.9.8 WMM Configuration

WMM is an abbreviation of Wi-Fi Multimedia. It defines the priority levels for four access categories derived from 802.1d (prioritization tabs). The categories are designed with specific types of traffic, voice, video, best effort and low priority data. There are four accessing categories - AC_BE , AC_BK, AC_VI and AC_VO for WMM.

Wireless LAN (2.4GHz) >> WMM Configuration

WMM Configuration | [Set to Factory Default](#) |

WMM Capable Enable Disable
 APSD Capable Enable Disable

WMM Parameters of Access Point

| | Aifsn | CWMin | CWMax | Txop | ACM | AckPolicy |
|-------|-------|-------|-------|------|--------------------------|--------------------------|
| AC_BE | 3 | 15 | 63 | 0 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_BK | 7 | 15 | 1023 | 0 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_VI | 1 | 7 | 15 | 94 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_VO | 1 | 3 | 7 | 47 | <input type="checkbox"/> | <input type="checkbox"/> |

WMM Parameters of Station

| | Aifsn | CWMin | CWMax | Txop | ACM |
|-------|-------|-------|-------|------|--------------------------|
| AC_BE | 3 | 15 | 1023 | 0 | <input type="checkbox"/> |
| AC_BK | 7 | 15 | 1023 | 0 | <input type="checkbox"/> |
| AC_VI | 2 | 7 | 15 | 94 | <input type="checkbox"/> |
| AC_VO | 2 | 3 | 7 | 47 | <input type="checkbox"/> |

Available settings are explained as follows:

| Item | Description |
|---------------------|---|
| WMM Capable | To apply WMM parameters for wireless data transmission, please click the Enable radio button. |
| APSD Capable | APSD (automatic power-save delivery) is an enhancement over the power-save mechanisms supported by Wi-Fi networks. It allows devices to take more time in sleeping state and consume less power to improve the performance by minimizing transmission latency. The default setting is Disable . |
| Aifsn | It controls how long the client waits for each data transmission. Please specify the value ranging from 1 to 15. Such parameter |

| | |
|--------------------|---|
| | will influence the time delay for WMM accessing categories. For the service of voice or video image, please set small value for AC_VI and AC_VO categories For the service of e-mail or web browsing, please set large value for AC_BE and AC_BK categories. |
| CWMin/CWMax | CWMin means contention Window-Min and CWMax means contention Window-Max. Please specify the value ranging from 1 to 15. Be aware that CWMax value must be greater than CWMin or equals to CWMin value. Both values will influence the time delay for WMM accessing categories. The difference between AC_VI and AC_VO categories must be smaller; however, the difference between AC_BE and AC_BK categories must be greater. |
| Txop | It means transmission opportunity. For WMM categories of AC_VI and AC_VO that need higher priorities in data transmission, please set greater value for them to get highest transmission opportunity. Specify the value ranging from 0 to 65535. |
| ACM | It is an abbreviation of Admission control Mandatory. It can restrict stations from using specific category class if it is checked. Note: VigorAP 902 provides standard WMM configuration in the web page. If you want to modify the parameters, please refer to the Wi-Fi WMM standard specification. |
| AckPolicy | “Uncheck” (default value) the box means the AP will answer the response request while transmitting WMM packets through wireless connection. It can assure that the peer must receive the WMM packets. “Check” the box means the AP will not answer any response request for the transmitting packets. It will have better performance with lower reliability. |

After finishing this web page configuration, please click **OK** to save the settings.

3.9.9 Bandwidth Management

The downstream or upstream from FTP, HTTP or some P2P applications will occupy large of bandwidth and affect the applications for other programs. Please use Bandwidth Management to make the bandwidth usage more efficient.

Wireless LAN (2.4GHz) >> Bandwidth Management

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|------------------------------------|--------|-------------------------------------|--------|
| SSID | | DrayTek-LAN-A | |
| Per Station Bandwidth Limit | | | |
| Enable | | <input checked="" type="checkbox"/> | |
| Upload Limit | 64K | | bps |
| Download Limit | 256K | | bps |
| Auto Adjustment | | <input type="checkbox"/> | |

Note :
 1. Download : Traffic going to any station. Upload : Traffic being sent from a wireless station.
 2. Allow auto adjustment could make the best utilization of available bandwidth.

OK Cancel

Available settings are explained as follows:

| Item | Description |
|-----------------------------|---|
| SSID | Display the specific SSID name. |
| Enable | Check this box to enable the bandwidth management for clients. |
| Upload Limit | Define the maximum speed of the data uploading which will be used for the wireless stations connecting to VigorAP with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Download Limit | Define the maximum speed of the data downloading which will be used for the wireless station connecting to VigorAP with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Auto Adjustment | Check this box to have the bandwidth limit determined by the system automatically. |
| Total Upload Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data uploading. |
| Total Download Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data downloading. |

After finishing this web page configuration, please click **OK** to save the settings.

3.9.10 Airtime Fairness

Airtime fairness is essential in wireless networks that must support critical enterprise applications.

Most of the applications are either symmetric or require more downlink than uplink capacity; telephony and email send the same amount of data in each direction, while video streaming and web surfing involve more traffic sent from access points to clients than the other way around. This is essential for ensuring predictable performance and quality-of-service, as well as allowing 802.11n and legacy clients to coexist on the same network. Without airtime fairness, offices using mixed mode networks risk having legacy clients slow down the entire network or letting the fastest client(s) crowd out other users.


With airtime fairness, every client at a given quality-of-service level has equal access to the network's airtime.

The wireless channel can be accessed by only one wireless station at the same time.

The principle behind the IEEE802.11 channel access mechanisms is that each station has **equal probability** to access the channel. When wireless stations have similar data rate, this principle leads to a fair result. In this case, stations get similar channel access time which is called airtime.

However, when stations have various data rate (e.g., 11g, 11n), the result is not fair. The slow stations (11g) work in their slow data rate and occupy too much airtime, whereas the fast stations (11n) become much slower.

Take the following figure as an example, both Station A(11g) and Station B(11n) transmit data packets through VigorAP 902. Although they have equal probability to access the wireless channel, Station B(11n) gets only a little airtime and waits too much because Station A(11g) spends longer time to send one packet. In other words, Station B(fast rate) is obstructed by Station A(slow rate).

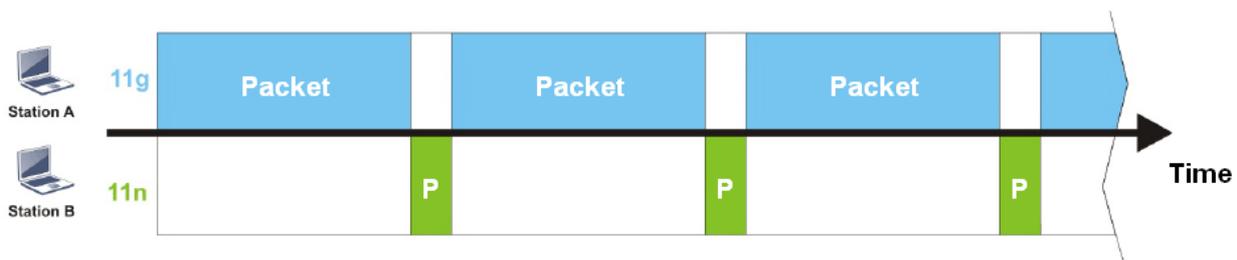

To improve this problem, Airtime Fairness is added for VigorAP 902. Airtime Fairness function tries to assign *similar airtime* to each station (A/B) by controlling TX traffic. In the following figure, Station B(11n) has higher probability to send data packets than Station A(11g). By this way, Station B(fast rate) gets fair airtime and it's speed is not limited by Station A(slow rate).



It is similar to automatic Bandwidth Limit. The dynamic bandwidth limit of each station depends on instant active station number and airtime assignment. Please note that Airtime Fairness of 2.4GHz and 5GHz are independent. But stations of different SSIDs function together, because they all use the same wireless channel. IN SPECIFIC ENVIRONMENTS, this function can reduce the bad influence of slow wireless devices and improve the overall wireless performance.

Suitable environment:

- (1) Many wireless stations.
- (2) All stations mainly use download traffic.
- (3) The performance bottleneck is wireless connection.

Wireless LAN (2.4GHz) >> Airtime Fairness

Enable **Airtime Fairness**
 Triggering Client Number (2 ~ 64, Default: 2)

Note: Please enable or disable this function according to the real situation and user experience. It is NOT suitable for all environments. You could check **Diagnostics >> Station Airtime** Graph first.

OK Cancel

Available settings are explained as follows:

| Item | Description |
|--------------------------------|---|
| Enable Airtime Fairness | <p>Try to assign similar airtime to each wireless station by controlling TX traffic.</p> <p>Airtime Fairness – Click the link to display the following screen of airtime fairness note.</p> <p>Triggering Client Number –Airtime Fairness function is applied only when active station number achieves this number.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

Note: Airtime Fairness function and Bandwidth Limit function should be mutually exclusive. So their webs have extra actions to ensure these two functions are not enabled simultaneously.

3.9.11 Station Control

Station Control is used to specify the duration for the wireless client to connect and reconnect VigorAP. If such function is not enabled, the wireless client can connect VigorAP until it shuts down.

Such feature is especially useful for free Wi-Fi service. For example, a coffee shop offers free Wi-Fi service for its guests for one hour every day. Then, the connection time can be set as “1 hour” and reconnection time can be set as “1 day”. Thus, the guest can finish his job within one hour and will not occupy the wireless network for a long time.

Note: Up to 300 Wireless Station records are supported by VigorAP.


Wireless LAN (2.4GHz) >> Station Control

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------------------------|--------|
| SSID | | DrayTek-LAN-A | |
| Enable | | <input type="checkbox"/> | |
| Connection Time | | 1 hour | |
| Reconnection Time | | 1 hour | |
| Display All Station Control List | | | |

Note: Once the feature is enabled, the connection time quota will apply to each wireless client (identified by MAC address).

OK Cancel

Available settings are explained as follows:
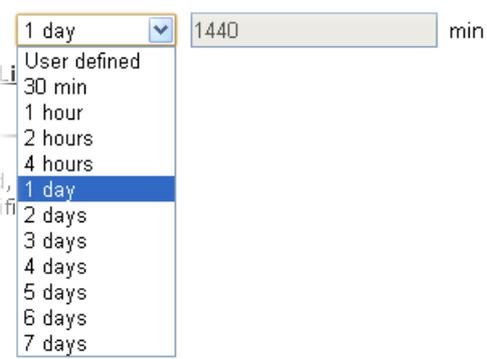
| Item | Description |
|--|--|
| SSID | Display the SSID that the wireless station will use it to connect with Vigor router. |
| Enable | Check the box to enable the station control function. |
| Connection Time / Reconnection Time | Use the drop down list to choose the duration for the wireless client connecting /reconnecting to Vigor router. Or, type the duration manually when you choose User defined .  |
| Display All Station Control List | All the wireless stations connecting to Vigor router by using such SSID will be listed on Station Control List. |

After finishing all the settings here, please click **OK** to save the configuration.

3.9.12 Roaming

The network signal for a single wireless access point might be limited by its coverage range. Therefore, if you want to expand the wireless network in a large exhibition with a quick method, you can install multiple access points with enabling the Roaming feature for each AP to reach the purpose of expanding wireless signals seamlessly.

These access points connecting for each other shall be verified by pre-authentication. This page allows you to enable the roaming feature and the pre-authentication.

Wireless LAN (2.4GHz) >> Roaming

AP-assisted Client Roaming Parameters

| | | |
|---|-----|--------------------------|
| <input type="checkbox"/> Minimum Basic Rate | 1 | Mbps |
| <input checked="" type="radio"/> Disable RSSI Requirement | | |
| <input checked="" type="radio"/> Strictly Minimum RSSI | -73 | dBm (42%) (Default: -73) |
| <input checked="" type="radio"/> Minimum RSSI | -66 | dBm (60%) (Default: -66) |
| with Adjacent AP RSSI over | 5 | dB (Default: 5) |

Fast Roaming(WPA2/802.1x)

| | |
|-----------------------------------|------------------------------------|
| <input type="checkbox"/> Enable | |
| PMK Caching : Cache Period | 10 minutes (10 ~ 600, Default: 10) |
| Pre-Authentication | |

OK Cancel

Available settings are explained as follows:


| Item | Description |
|--|---|
| AP-assisted Client Roaming Parameters | <p>When the link rate of wireless station is too low or the signal received by the wireless station is too worse, VigorAP 902 will automatically detect (based on the link rate and RSSI requirement) and cut off the network connection for that wireless station to assist it to connect another Wireless AP to get better signal.</p> <p>Minimum Basic Rate – Check the box to use the drop down list to specify a basic rate (Mbps). When the link rate of the wireless station is below such value, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Disable RSSI Requirement - If it is selected, VigorAP will not terminate the network connection based on RSSI.</p> <p>Strictly Minimum RSSI - VigorAP uses RSSI (received signal strength indicator) to decide to terminate the network connection of wireless station. When the signal strength is below the value (dBm) set here, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Minimum RSSI - When the signal strength of the wireless station is below the value (dBm) set here and adjacent AP (must be DrayTek AP and support such feature too) with higher signal strength value (defined in the field of With Adjacent AP RSSI over) is detected by VigorAP 902, VigorAP 902 will terminate the network connection for that wireless station. Later, the wireless station can connect to the adjacent AP (with better</p> |

| | |
|--|---|
| | <p>RSSI).</p> <ul style="list-style-type: none"> ● With Adjacent AP RSSI over – Specify a value as a threshold. |
| <p>Fast Roaming (WPA2/802.1x)</p> | <p>Enable – Check the box to enable fast roaming configuration.</p> <p>PMK Cache Period - Set the expire time of WPA2 PMK (Pairwise master key) cache. PMK Cache manages the list from the BSSIDs in the associated SSID with which it has pre-authenticated. Such feature is available for WPA2/802.1 mode.</p> <p>Pre-Authentication - Enables a station to authenticate to multiple APs for roaming securer and faster. With the pre-authentication procedure defined in IEEE 802.11i specification, the pre-four-way-handshake can reduce handoff delay perceivable by a mobile node. It makes roaming faster and more secure. (Only valid in WPA2)</p> <p>Enable - Enable IEEE 802.1X Pre-Authentication.</p> <p>Disable - Disable IEEE 802.1X Pre-Authentication.</p> |


After finishing this web page configuration, please click **OK** to save the settings.

3.9.13 Band Steering

Band Steering detects if the wireless clients are capable of 5GHz operation, and steers them to that frequency. It helps to leave 2.4GHz band available for legacy clients, and improves users experience by reducing channel utilization.

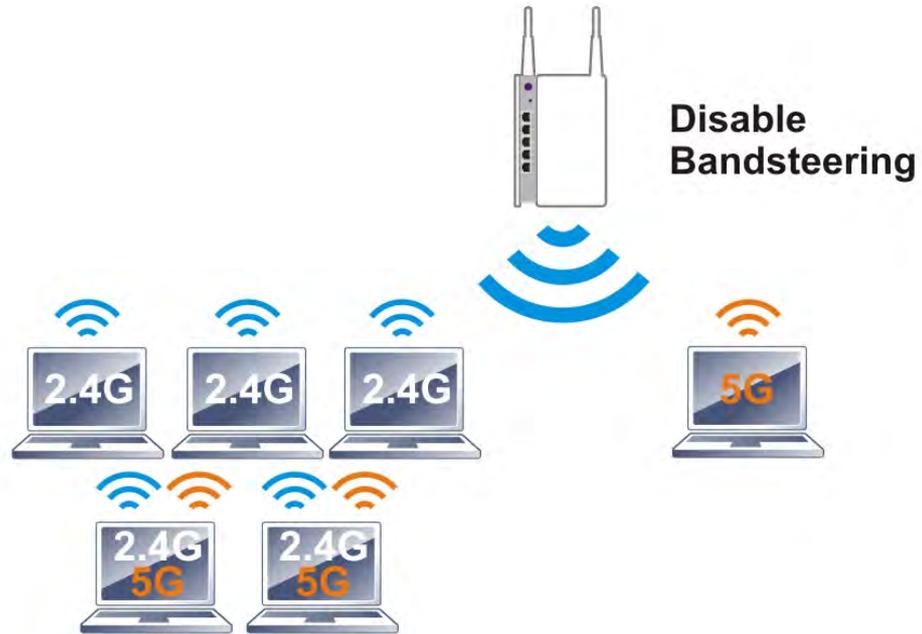

If dual-band is detected, the AP will let the wireless client connect to less congested wireless LAN, such as 5GHz to prevent from network congestion.

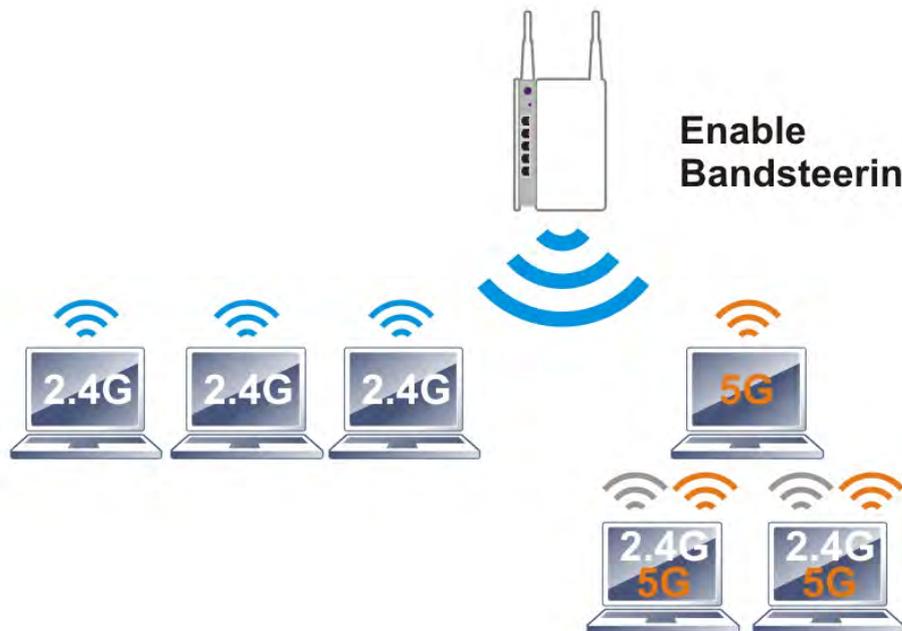

Note: To make Band Steering work successfully, SSID and security on 2.4GHz also MUST be broadcasted on 5GHz.

Open **Wireless LAN (2.4GHz)>>Band Steering** to get the following web page:

Wireless LAN (2.4GHz) >> Band Steering

Enable **Band Steering**
 Check Time for WLAN Client 5G Capability seconds (1 ~ 60, Default: 15)
 5GHz Minimum RSSI dBm (%) (Default: -78)
 (Only do band steering when 5GHz signal is better than Minimum RSSI)


Note: Please setup at least one pair of 2.4GHz and 5GHz Wireless LAN with the same SSID and security.

Available settings are explained as follows:

| Item | Description |
|-----------------------------|--|
| Enable Band Steering | <p>If it is enabled, VigorAP will detect if the wireless client is capable of dual-band or not within the time limit.</p> <p>Check Time.... – If the wireless station does not have the capability of 5GHz network connection, the system shall wait and check for several seconds (15 seconds, in default) to make the 2.4GHz network connection. Specify the time limit for VigorAP to detect the wireless client.</p> <p>5GHz Minimum RSSI - The wireless station has the capability of 5GHz network connection, yet the signal performance might not be satisfied. Therefore, when the signal strength is below the value set here while the wireless station connecting to VigorAP 902, VigorAP will allow the client to connect to 2.4GHz network.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

Below shows how Band Steering works.

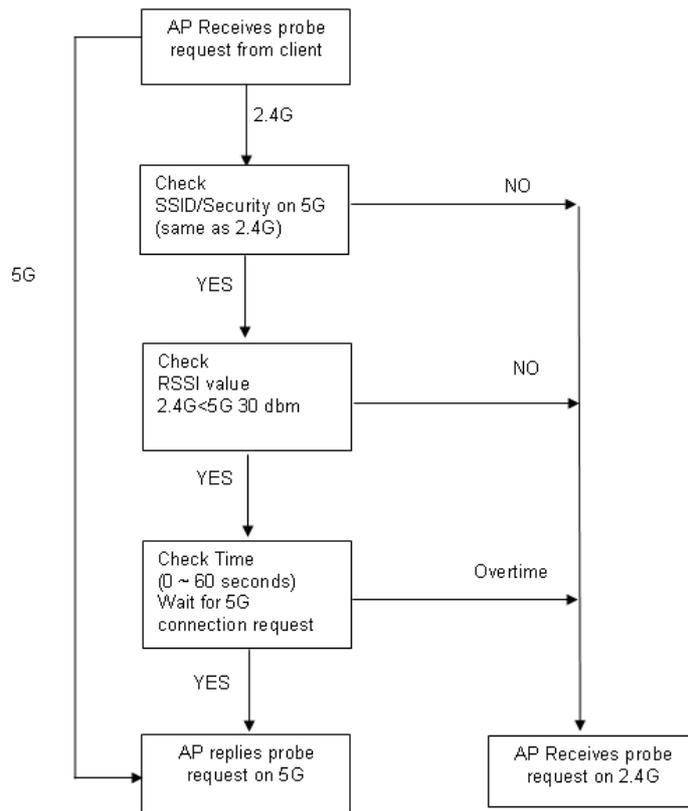

How to Use Band Steering?

1. Open **Wireless LAN(2.4GHz)>>Band Steering**.
2. Check the box of **Enable Band Steering** and use the default value (15) for check time setting.

Wireless LAN (2.4GHz) >> Band Steering

Enable Band Steering

Check Time for WLAN Client 5G Capability seconds (1 ~ 60, Default: 15)

5GHz Minimum RSSI dBm (%) (Default: -78)

(Only do band steering when 5GHz signal is better than Minimum RSSI)

Note: Please setup at least one pair of 2.4GHz and 5GHz Wireless LAN with the same SSID and security.

3. Click **OK** to save the settings.
4. Open **Wireless LAN (2.4GHz)>>General Setup** and **Wireless LAN (5GHz)>>General Setup**. Configure SSID as *ap902-BandSteering* for both pages. Click **OK** to save the settings.

Wireless LAN (2.4GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Limit Client (3-64) (default: 64)

Mode :

| | Hide SSID | SSID | Isolate Member (0:Untagged) | VLAN ID | MAC Clone |
|---|--------------------------|----------------------|-----------------------------|--------------------------------|--------------------------|
| 1 | <input type="checkbox"/> | ap902-BandSteering | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |
| 2 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |
| 3 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |
| 4 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> | <input type="checkbox"/> |

Hide SSID: Prevent SSID from being scanned.
Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.
MAC Clone: Set the MAC address of SSID 1. The MAC addresses of other SSIDs and the Wireless client will also change based on this MAC address. Please notice that the last byte of this MAC address must be a

Same value for 2.4GHz and 5GHz

Wireless LAN (5GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Limit Client (3-64) (default: 64)

Mode :

| | Hide SSID | SSID | Isolate Member | VLAN ID (0:Untagged) |
|---|--------------------------|----------------------|--------------------------|--------------------------------|
| 1 | <input type="checkbox"/> | ap902-BandSteering | <input type="checkbox"/> | <input type="text" value="0"/> |
| 2 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 3 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 4 | <input type="checkbox"/> | <input type="text"/> | <input type="checkbox"/> | <input type="text" value="0"/> |

Hide SSID: Prevent SSID from being scanned.
Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.

Channel :
 Details : 20MHz / 40MHz Ext Ch: 40 , 80MHz Center Ch: 42

- Open **Wireless LAN (2.4GHz)>>Security** and **Wireless LAN (5GHz)>>Security**. Configure Security as *12345678* for both pages. Click **OK** to save the settings.

Wireless LAN (2.4GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------|--------|
| SSID | | | |
| ap902-BandSteering | | | |
| Mode | | | |
| Mixed(WPA+WPA2)/PSK | | | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | | |
| <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | | | |
| Pass Phrase | | | |
| <input type="text" value="12345678"/> | | | |
| Key Renewal Interval | | | |
| <input type="text" value="3600"/> seconds | | | |
| WEP | | | |
| <input type="radio"/> Key 1 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 2 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 3 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 4 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| 802.1x WEP | | | |
| <input type="radio"/> Disable <input type="radio"/> Enable | | | |

Same value for 2.4GHz and 5GHz

Wireless LAN (5GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------|--------|
| SSID | | | |
| ap902-BandSteering | | | |
| Mode | | | |
| Mixed(WPA+WPA2)/PSK | | | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | | |
| <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | | | |
| Pass Phrase | | | |
| <input type="text" value="12345678"/> | | | |
| Key Renewal Interval | | | |
| <input type="text" value="3600"/> seconds | | | |
| PMK Cache Period | | | |
| <input type="text" value="10"/> minutes | | | |
| Pre-Authentication | | | |
| <input checked="" type="radio"/> Disable <input type="radio"/> Enable | | | |
| WEP | | | |
| <input checked="" type="radio"/> Key 1 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 2 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 3 : <input type="text"/> <input type="text" value="Hex"/> | | | |
| <input type="radio"/> Key 4 : <input type="text"/> <input type="text" value="Hex"/> | | | |

- Now, VigorAP 902 will let the wireless clients connect to less congested wireless LAN, such as 5GHz to prevent from network congestion.

3.9.14 Station List

Station List provides the knowledge of connecting wireless clients now along with its status code. Each tab (general, advanced, control, neighbor) will display different status information (including MAC address, Vendor, SSID, Auth, Encrypt, Tx/Rx Rate, Hostname, RSSI, Link Speed, BW, PSM, WMM, PHMd, MCS, Connection Time, Reconnection Time, Approx. Distance, Visit Time, and so on).

General

Display general information (e.g., MAC Address, SSID, Auth, Encrypt, TX/RX Rate) for the station.

Wireless LAN (2.4GHz) >> Station List

Station List

| | | | | | | | General | Advanced | Control | Neighbor |
|-------|-------------------|----------|--------------|------------------|------|------------|---------|----------|---------|----------|
| Index | MAC Address | Vendor | RSSI | Approx. Distance | SSID | Visit Time | | | | |
| 1 | DA:A1:19:E2:65:AD | | 5% (-88dBm) | 141.25m | | 0d:0h: | | | | |
| 2 | 00:50:7F:F0:BD:2B | DrayTek | 52% (-69dBm) | 15.85m | | 0d:0h: | | | | |
| 3 | 00:50:7F:37:6D:E5 | DrayTek | 47% (-71dBm) | 19.95m | | 0d:0h: | | | | |
| 4 | 1C:4B:D6:8B:9C:00 | Azurewav | 18% (-83dBm) | 79.43m | | 0d:1h: | | | | |
| 5 | 00:15:AF:A5:24:A0 | Azurewav | 26% (-79dBm) | 50.12m | | 0d:0h: | | | | |
| 6 | B0:34:95:22:50:FD | Apple | 47% (-71dBm) | 19.95m | | 0d:0h: | | | | |
| 7 | B4:52:7E:D6:68:9D | Sony | 20% (-82dBm) | 70.79m | | 0d:0h: | | | | |
| 8 | 00:1F:3C:51:9C:55 | Intel | 39% (-74dBm) | 28.18m | | 0d:1h: | | | | |

Refresh

Add to Access Control:

Client's MAC Address : : : : : :

- Note:**
1. Approx. Distance is calculated by actual signal strength of device detected. Inaccuracy might occur based on barrier encountered.
 2. Due to the differences in signal strength for different devices, the calculated value of approximate distance also might be different.
 3. Trademarks and brand names are the properties of their respective owners.

Add

Available settings are explained as follows:

| Item | Description |
|------------------------------|---|
| MAC Address | Display the MAC Address for the connecting client. |
| Hostname | Display the host name of the connecting client. |
| SSID | Display the SSID that the wireless client connects to. |
| Auth | Display the authentication that the wireless client uses for connection with such AP. |
| Encrypt | Display the encryption mode used by the wireless client. |
| Tx Rate/Rx Rate | Display the transmission /receiving rate for packets. |
| Refresh | Click this button to refresh the status of station list. |
| Add to Access Control | Client's MAC Address - For additional security of wireless access, the Access Control facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. |

| | |
|------------|---|
| Add | Click this button to add current typed MAC address into Access Control . |
|------------|---|

Advanced

Display more information (e.g., AID, PSM, WMM, RSSI PhMd, BW, MCS, Rate) for the station.

Control


Display connection and reconnection time of the wireless stations.

Neighbor

Display more information for the neighboring wireless stations.

3.10 Wireless LAN (5GHz) Settings for AP Mode

The AP mode allows wireless clients to connect to access point and exchange data with the devices connected to the wired network.

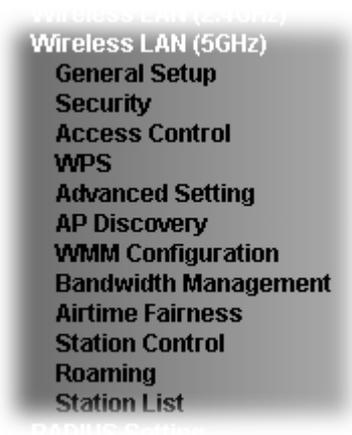

3.10.1 General Setup

By clicking the **General Setup**, a new web page will appear so that you could configure the general settings for wireless connection such as specifying SSID, selecting the wireless channel, isolate LAN connection and so on.

Wireless LAN (5GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Client Limit (3 ~ 64, default: 64)

Enable Client Limit per SSID (3 ~ 64, default: 64)

Mode : (v)

Channel : (Active Channel: 100)

Details : [DFS] 20 MHz, 40 MHz (ExtCh: 104), 80 MHz (CentCh: 106)


Enable 2 Subnet (Simulate 2 APs)

| | Enable | Hide SSID | SSID | Subnet | Isolate Member | VLAN ID (0:Untagged) |
|---|-------------------------------------|--------------------------|--|--|--------------------------|--------------------------------|
| 1 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="MK-902-mamie"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="text" value="0"/> |
| 2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="DrayTek5G-LAN-B"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="text" value="0"/> |
| 3 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="text" value="0"/> |
| 4 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="text" value="0"/> |

Hide SSID: Prevent SSID from being scanned.
Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.

Available settings are explained as follows:

| Item | Description |
|----------------------------|---|
| Enable Wireless LAN | Check the box to enable wireless function. |
| Enable Client Limit | Check the box to set the maximum number of wireless stations which try to connect Internet through VigorAP. The number you can set is from 3 to 64. |
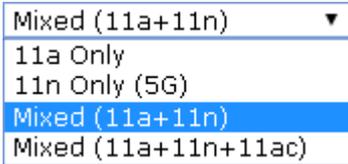
| | |
|---|--|
| Enable Client Limit per SSID | Define the maximum number of wireless stations per SSID which try to connect to Internet through Vigor device. The number you can set is from 3 to 64. |
| Mode | <p>At present, VigorAP 902 can be connected by 11a only, 11n only (5G), Mixed (11a+11n) and Mixed (11a+11n+ac) stations simultaneously. Simply choose Mixed (11a+11n+ac) mode.</p>  |
| Channel | Means the channel of frequency of the wireless LAN. The default channel is 36 . You may switch channel if the selected channel is under serious interference. |
| Enable 2 Subnet (Simulate 2 APs) | <p>Check the box to enable the function for two independent subnets. Once you enable this function, LAN-A and LAN-B would be independent. Next, you can connect one router in LAN-A, and another router in LAN-B. Such mechanism can make you feeling that you have two independent AP/subnet functions in one VigorAP 902.</p> <p>If you disable this function, LAN-A and LAN-B ports are in the same domain. You could only connect one router (no matter connecting to LAN-A or LAN-B) in this environment.</p> |
| Hide SSID | Check it to prevent from wireless sniffing and make it harder for unauthorized clients or STAs to join your wireless LAN. Depending on the wireless utility, the user may only see the information except SSID or just cannot see any thing about VigorAP 902 while site surveying. The system allows you to set four sets of SSID for different usage. |
| SSID | Set a name for VigorAP 902 to be identified. Default settings are Draytek_5G-LANA and Draytek_5G-LANB. When Enable 2 Subnet is enabled, you can specify subnet interface (LAN-A or LAN-B) for each SSID by using the drop down menu. |
| Subnet | Choose LAN-A or LAN-B for each SSID. If you choose LAN-A, the wireless clients connecting to this SSID could only communicate with LAN-A. |
| Isolate Member | Check this box to make the wireless clients (stations) with the same SSID not accessing for each other. |
| VLAN ID | <p>Type the value for such SSID. Packets transferred from such SSID to LAN will be tagged with the number.</p> <p>If your network uses VLANs, you can assign the SSID to a VLAN on your network. Client devices that associate using the SSID are grouped into this VLAN. The VLAN ID range is from 3 to 4095. The VLAN ID is 0 by default, it means disabling the VLAN function for the SSID.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.10.2 Security


This page allows you to set security with different modes for SSID 1, 2, 3 and 4 respectively. After configuring the correct settings, please click **OK** to save and invoke it.

By clicking the **Security Settings**, a new web page will appear so that you could configure the settings.


Wireless LAN (5GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|---|--------|--|------------------------------------|
| SSID | | MK-902-mamie | |
| Mode | | Mixed(WPA+WPA2)/PSK | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | |
| Pass Phrase | | <input type="password" value="....."/> | |
| Key Renewal Interval | | <input type="text" value="3600"/> seconds | |
| EAPOL Key Retry | | <input checked="" type="radio"/> Enable <input type="radio"/> Disable | |
| WEP | | | |
| <input checked="" type="radio"/> Key 1 : | | <input type="password"/> | <input type="button" value="Hex"/> |
| <input type="radio"/> Key 2 : | | <input type="password"/> | <input type="button" value="Hex"/> |
| <input type="radio"/> Key 3 : | | <input type="password"/> | <input type="button" value="Hex"/> |
| <input type="radio"/> Key 4 : | | <input type="password"/> | <input type="button" value="Hex"/> |
| 802.1x WEP | | <input type="radio"/> Disable <input checked="" type="radio"/> Enable | |

Available settings are explained as follows:
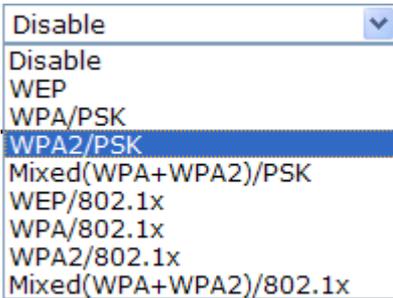
| Item | Description |
|-------------|--|
| Mode | <p>There are several modes provided for you to choose.</p>  <p>Disable - The encryption mechanism is turned off.</p> <p>WEP - Accepts only WEP clients and the encryption key should be entered in WEP Key.</p> <p>WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK - Accepts only WPA clients and the encryption key should be entered in PSK. The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WEP/802.1x - The built-in RADIUS client feature enables VigorAP 902 to assist the remote dial-in user or a wireless station and the RADIUS server in performing mutual</p> |

| | |
|-----------------------------|--|
| | <p>authentication. It enables centralized remote access authentication for network management.</p> <p>The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication. Select WPA, WPA2 or Auto as WPA mode.</p> <p>WPA/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WPA2/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> |
| WPA Algorithms | Select TKIP, AES or TKIP/AES as the algorithm for WPA. Such feature is available for WPA2/802.1x, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Pass Phrase | Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). Such feature is available for WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Key Renewal Interval | WPA uses shared key for authentication to the network. However, normal network operations use a different encryption key that is randomly generated. This randomly generated key that is periodically replaced. Enter the renewal security time (seconds) in the column. Smaller interval leads to greater security but lower performance. Default is 3600 seconds. Set 0 to disable re-key. Such feature is available for WPA2/802.1, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| EAPOL Key Retry | EAPOL means Extensible Authentication Protocol over LAN. Click Enable to make sure that the key will be installed and used once in order to prevent key reinstallation attack. |
| PMK Cache Period | Set the expire time of WPA2 PMK (Pairwise master key) cache. PMK Cache manages the list from the BSSIDs in the associated SSID with which it has pre-authenticated. Such feature is available for WPA2/802.1 mode. |
| Pre-Authentication | <p>Enables a station to authenticate to multiple APs for roaming securer and faster. With the pre-authentication procedure defined in IEEE 802.11i specification, the pre-four-way-handshake can reduce handoff delay perceivable by a mobile node. It makes roaming faster and more secure. (Only valid in WPA2)</p> <p>Enable - Enable IEEE 802.1X Pre-Authentication. Disable - Disable IEEE 802.1X Pre-Authentication.</p> |
| Key 1 – Key 4 | Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 |

| | |
|-------------------|---|
| | <p>ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(~) except '#' and ','. Such feature is available for WEP mode.</p>  |
| 802.1x WEP | <p>Disable - Disable the WEP Encryption. Data sent to the AP will not be encrypted.</p> <p>Enable - Enable the WEP Encryption.</p> <p>Such feature is available for WEP/802.1x mode.</p> |

Click the link of **RADIUS Server** to access into the following page for more settings.

RADIUS Server

Use internal RADIUS Server

IP Address

Port

Shared Secret

Session Timeout

Available settings are explained as follows:

| Item | Description |
|-----------------------------------|---|
| Use internal RADIUS Server | <p>There is a RADIUS server built in VigorAP 902 which is used to authenticate the wireless client connecting to the access point. Check this box to use the internal RADIUS server for wireless security.</p> <p>Besides, if you want to use the external RADIUS server for authentication, do not check this box.</p> <p>Please refer to the section, 3.13 RADIUS Server to configure settings for internal server of VigorAP 902.</p> |
| IP Address | Enter the IP address of external RADIUS server. |
| Port | The UDP port number that the external RADIUS server is using. The default value is 1812, based on RFC 2138. |
| Shared Secret | The external RADIUS server and client share a secret that is used to authenticate the messages sent between them. Both sides must be configured to use the same shared secret. |
| Session Timeout | Set the maximum time of service provided before re-authentication. Set to zero to perform another authentication immediately after the first authentication has successfully completed. (The unit is second.) |

After finishing this web page configuration, please click **OK** to save the settings.

3.10.3 Access Control

For additional security of wireless access, the **Access Control** facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. By clicking the **Access Control**, a new web page will appear, as depicted below, so that you could edit the clients' MAC addresses to control their access rights (deny or allow).

Wireless LAN (5GHz) >> Access Control

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|---|--------|
| SSID: DrayTek5G-LAN-A Policy: <input type="button" value="Disable"/> | | | |
| MAC Address Filter | | | |
| Index | | MAC Address | |
| <div style="border: 1px solid gray; height: 100px; width: 100%;"></div> | | | |
| Client's MAC Address : <input type="text"/> | | | |
| <input type="button" value="Add"/> <input type="button" value="Delete"/> <input type="button" value="Edit"/> <input type="button" value="Cancel"/> Limit:256 entries | | | |
| <input type="button" value="OK"/> <input type="button" value="Cancel"/> | | | |
| Backup ACL Cfg : <input type="button" value="Backup"/> | | Upload From File: <input type="button" value="選擇檔案"/> 未選擇檔案 <input type="button" value="Restore"/> | |

Available settings are explained as follows:

| Item | Description |
|-----------------------------|---|
| Policy | Select to enable any one of the following policy or disable the policy. Choose Activate MAC address filter to type in the MAC addresses for other clients in the network manually. Choose Blocked MAC address filter , so that all of the devices with the MAC addresses listed on the MAC Address Filter table will be blocked and cannot access into VigorAP 902. <div style="border: 1px solid gray; padding: 5px; margin-top: 10px;"> <input type="button" value="Activate MAC address filter"/> <input type="button" value="Disable"/> <input type="button" value="Activate MAC address filter"/> <input type="button" value="Blocked MAC address filter"/> </div> |
| MAC Address Filter | Display all MAC addresses that are edited before. |
| Client's MAC Address | Manually enter the MAC address of wireless client. |
| Add | Add a new MAC address into the list. |
| Delete | Delete the selected MAC address in the list. |
| Edit | Edit the selected MAC address in the list. |
| Cancel | Give up the access control set up. |
| Backup | Click it to store the settings (MAC addresses on MAC Address |

| | |
|----------------|--|
| | Filter table) on this page as a file. |
| Restore | Click it to restore the settings (MAC addresses on MAC Address Filter table) from an existed file. |

After finishing this web page configuration, please click **OK** to save the settings.

3.10.4 WPS

Open **Wireless LAN>>WPS** to configure the corresponding settings.

Wireless LAN (5GHz) >> WPS (Wi-Fi Protected Setup)

Enable WPS 

Wi-Fi Protected Setup Information

| | |
|-------------------------|---------------------|
| WPS Configured | Yes |
| WPS SSID | DrayTek5G-LAN-A |
| WPS Auth Mode | Mixed(WPA+WPA2)/PSK |
| WPS Encrypt Type | TKIP/AES |

Device Configure

| | |
|-------------------------------------|---|
| Configure via Push Button | <input type="button" value="Start PBC"/> |
| Configure via Client PinCode | <input type="text"/> <input type="button" value="Start PIN"/> |

Status: Not used

Note: WPS can help your wireless client automatically connect to the Access point.

: WPS is Disabled.

: WPS is Enabled.

: Waiting for WPS requests from wireless clients.

Available settings are explained as follows:

| Item | Description |
|-------------------------------------|---|
| Enable WPS | Check this box to enable WPS setting. |
| WPS Configured | Display related system information for WPS. If the wireless security (encryption) function of VigorAP 902 is properly configured, you can see 'Yes' message here. |
| WPS SSID | Display current selected SSID. |
| WPS Auth Mode | Display current authentication mode of the VigorAP 902. Only WPA2/PSK and WPA/PSK support WPS. |
| WPS Encryp Type | Display encryption mode (None, WEP, TKIP, AES, etc.) of VigorAP 902. |
| Configure via Push Button | Click Start PBC to invoke Push-Button style WPS setup procedure. VigorAP 902 will wait for WPS requests from wireless clients about two minutes. Both ACT and 5G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes) |
| Configure via Client PinCode | Type the PIN code specified in wireless client you wish to connect, and click Start PIN button. Both ACT and 5G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes). |

3.10.5 Advanced Setting


This page is to determine which algorithm will be selected for wireless transmission rate.

Wireless LAN (5GHz) >> Advanced Setting

| | |
|--------------------------------|--|
| Channel Width | <input type="radio"/> 20 MHz <input type="radio"/> Auto 20/40 MHz <input checked="" type="radio"/> Auto 20/40/80 MHz |
| Tx Power | <input checked="" type="radio"/> 100% <input type="radio"/> 80% <input type="radio"/> 60% <input type="radio"/> 30% <input type="radio"/> 20% <input type="radio"/> 10% |
| Rate Adaptation Algorithm | <input checked="" type="radio"/> New <input type="radio"/> Old |
| Fragment Length (256 - 2346) | <input type="text" value="2346"/> bytes |
| RTS Threshold (1 - 2347) | <input type="text" value="2347"/> bytes |
| Country Code | <input type="text" value=""/> (Reference) |
| Auto Channel Filtered Out List | <input type="checkbox"/> 36 <input type="checkbox"/> 40 <input type="checkbox"/> 44 <input type="checkbox"/> 48 <input type="checkbox"/> 52 <input type="checkbox"/> 56 <input type="checkbox"/> 60 <input type="checkbox"/> 64 <input type="checkbox"/> 100 <input type="checkbox"/> 104 <input type="checkbox"/> 108 <input type="checkbox"/> 112 <input type="checkbox"/> 116 <input type="checkbox"/> 120 <input type="checkbox"/> 124 <input type="checkbox"/> 128 <input type="checkbox"/> 132 <input type="checkbox"/> 136 <input type="checkbox"/> 140 |
| Isolate 2.4GHz and 5GHz bands | <input checked="" type="radio"/> Enable <input type="radio"/> Disable |
| Isolate members with IP | <input type="radio"/> Enable <input checked="" type="radio"/> Disable |

OK Cancel

Available settings are explained as follows:

| Item | Description |
|----------------------------------|--|
| Channel Width | <p>20 MHz- the AP will use 20MHz for data transmission and receiving between the AP and the stations.</p> <p>Auto 20/40 MHz- the AP will scan for nearby wireless AP, and then use 20MHz if the number of AP is more than 10, or use 40MHz if it's not.</p> <p>Auto 20/40/80 MHz- the AP will use 20MHz or 40MHz or 80MHz for data transmission and receiving according to the station capability. Such channel can increase the performance for data transmission.</p> |
| Tx Power | <p>The default setting is the maximum (100%). Lowering down the value may degrade range and throughput of wireless.</p>  |
| Rate Adaptation Algorithm | <p>Wireless transmission rate is adapted dynamically. Usually, performance of “new” algorithm is better than “old”.</p> |
| Fragment Length | <p>Set the Fragment threshold of wireless radio. Do not modify default value if you don't know what it is, default value is 2346.</p> |
| RTS Threshold | <p>Minimize the collision (unit is bytes) between hidden stations to improve wireless performance.</p> <p>Set the RTS threshold of wireless radio. Do not modify default value if you don't know what it is, default value is 2347.</p> |
| Country Code | <p>VigorAP broadcasts country codes by following the 802.11d</p> |

| | |
|---------------------------------------|--|
| | standard. However, some wireless stations will detect / scan the country code to prevent conflict occurred. If conflict is detected, wireless station will be warned and is unable to make network connection. Therefore, changing the country code to ensure successful network connection will be necessary for some clients. |
| Auto Channel Filtered Out List | The selected wireless channels will be discarded if AutoSelect is selected as Channel selection mode in Wireless LAN>>General Setup . |
| Isolate 2.4GHz and 5GHz bands | <p>The default setting is “Enable”. It means that the wireless client using 2.4GHz band is unable to connect to the wireless client with 5GHz band, and vice versa.</p> <p>For WLAN 2.4GHz and 5GHz set with the same SSID name:</p> <ul style="list-style-type: none"> ● No matter such function is enabled or disabled, clients using WLAN 2.4GHz and 5GHz can communicate for each other if Isolate Member (in Wireless LAN>>General Setup) is NOT enabled for such SSID. ● Yet, if the function of Isolate Member (in Wireless LAN>>General Setup) is enabled for such SSID, clients using WLAN 2.4GHz and 5GHz will be unable to communicate with each other. |
| Isolate members with IP | <p>The default setting is “Disable”.</p> <p>If it is enabled, VigorAP will isolate different wireless clients according to their IP address(es).</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.10.6 AP Discovery

VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. Based on the scanning result, users will know which channel is clean for usage. Also, it can be used to facilitate finding an AP for a WDS link. Notice that during the scanning process (about 5 seconds), no client is allowed to connect to Vigor.

This page is used to scan the existence of the APs on the wireless LAN. Please click **Scan** to discover all the connected APs.

Wireless LAN (5GHz) >> Access Point Discovery

Access Point List

Enable AP Monitor Mode

| Index | SSID | BSSID | RSSI | Channel | Encryption | Authentication | Mode | Ch. Width | Last Detected |
|-------|---------------|-------------------|------|---------|------------|---------------------|----------|-----------|-----------------|
| 1 | Draytek5G | 00:1d:aa:7f:5d:5a | 24% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 20 | Jan 1, 22:16:31 |
| 2 | ssid5g3 | 02:1d:aa:7f:5d:5a | 24% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 20 | Jan 1, 22:16:31 |
| 3 | v2860 5g 1 | 00:1d:aa:86:ba:d2 | 7% | 36 | AES | WPA2/PSK | 11a/n/ac | 40 | Jan 1, 22:16:31 |
| 4 | Hotpost_5G... | 02:1d:aa:cb:a3:12 | 63% | 36 | NONE | | 11a/n | 40 | Jan 1, 22:16:31 |
| 5 | Draytek5G | 00:1d:aa:7f:5d:8e | 10% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 20 | Jan 1, 22:16:31 |
| 6 | v2860 5g 2 | 02:1d:aa:86:ba:d2 | 0% | 36 | AES | WPA2/PSK | 11a/n/ac | 40 | Jan 1, 22:16:31 |
| 7 | Hotspot_5G... | 00:1d:aa:cb:a3:12 | 100% | 36 | NONE | | 11a/n | 40 | Jan 1, 22:16:31 |
| 8 | PQC_5G | 00:1d:aa:3d:4f:15 | 10% | 40 | NONE | | 11a/n/ac | 80 | Jan 1, 22:16:31 |
| 9 | v2860-Smar... | 00:1d:aa:5d:ca:c2 | 47% | 48 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 80 | Jan 1, 22:16:31 |
| 10 | | 00:1d:aa:54:b1:3a | 5% | 48 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n | 40 | Jan 1, 22:10:30 |
| 11 | 910-MK-mam... | 00:1d:aa:7c:cf:a6 | 81% | 64 | NONE | | 11a/n/ac | 80 | Jan 1, 22:16:31 |
| 12 | 910-MK-mam... | 02:1d:aa:7c:cf:a6 | 78% | 64 | NONE | | 11a/n/ac | 80 | Jan 1, 22:16:31 |
| 13 | IEFP-Entra... | 00:1d:aa:d0:ee:b2 | 15% | 108 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 80 | Jan 1, 22:16:31 |
| 14 | RD8_5G_wir... | 00:1d:aa:5b:a0:ca | 2% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 80 | Jan 1, 22:00:30 |
| 15 | FAE-Wendy-... | 02:1d:aa:f0:6d:f2 | 0% | 100 | AES | WPA2 | 11a/n/ac | 80 | Jan 1, 21:30:30 |
| 16 | FAE-Wendy-... | 00:1d:aa:f0:6d:f2 | 0% | 100 | AES | WPA2/PSK | 11a/n/ac | 80 | Jan 1, 22:16:31 |
| 17 | | 00:1d:aa:54:b3:d2 | 2% | 48 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n | 40 | Jan 1, 21:40:30 |
| 18 | DrayTek_5G | 00:1d:aa:19:55:c2 | 7% | 48 | NONE | | 11a/n | 40 | Jan 1, 22:10:30 |

Scan

See [Channel Interference](#)

Note: During the scanning process (about 5 seconds), no station is allowed to connect with the AP.

Each item is explained as follows:

| Item | Description |
|-------------------------------|--|
| Enable AP Monitor Mode | This function can help to get and keep the records of APs detected by such device after clicking Scan. In general, only the available AP will be detected by Vigor device. Once the AP is unavailable, it will be deleted from the Access Point List immediately. However, if such function is enabled, the system will keep the record of the AP (once detected by Vigor device) until it is available for Vigor device again. |
| SSID | Display the SSID of the AP scanned by VigorAP 902. |
| BSSID | Display the MAC address of the AP scanned by VigorAP 902. |
| RSSI | Display the signal strength of the access point. RSSI is the abbreviation of Received Signal Strength Indication. |
| Channel | Display the wireless channel used for the AP that is scanned by VigorAP 902. |
| Encryption | Display the encryption mode for the scanned AP. |
| Authentication | Display the authentication type that the scanned AP applied. |
| Mode | Display the wireless connection mode that the scanned AP used. |
| Ch. Width | Display the channel width that the scanned AP used. |
| Scan | It is used to discover all the connected AP. The results will be |

| | |
|-----------------------------|--|
| | shown on the box above this button |
| Channel Interference | Access into Diagnostics>>Interference Monitor for viewing interference status for channel(s). |

3.10.7 WMM Configuration

WMM is an abbreviation of Wi-Fi Multimedia. It defines the priority levels for four access categories derived from 802.1d (prioritization tabs). The categories are designed with specific types of traffic, voice, video, best effort and low priority data. There are four accessing categories - AC_BE , AC_BK, AC_VI and AC_VO for WMM.

Wireless LAN (5GHz) >> WMM Configuration

WMM Configuration
[Set to Factory Default](#)

WMM Capable Enable Disable

APSD Capable Enable Disable

WMM Parameters of Access Point

| | Aifsn | CWMin | CWMax | Txop | ACM | AckPolicy |
|-------|-------|-------|-------|------|--------------------------|--------------------------|
| AC_BE | 3 | 15 | 63 | 0 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_BK | 7 | 15 | 102 | 0 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_VI | 1 | 7 | 15 | 94 | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_VO | 1 | 3 | 7 | 47 | <input type="checkbox"/> | <input type="checkbox"/> |

WMM Parameters of Station

| | Aifsn | CWMin | CWMax | Txop | ACM |
|-------|-------|-------|-------|------|--------------------------|
| AC_BE | 3 | 15 | 102 | 0 | <input type="checkbox"/> |
| AC_BK | 7 | 15 | 102 | 0 | <input type="checkbox"/> |
| AC_VI | 2 | 7 | 15 | 94 | <input type="checkbox"/> |
| AC_VO | 2 | 3 | 7 | 47 | <input type="checkbox"/> |

Available settings are explained as follows:

| Item | Description |
|---------------------|---|
| WMM Capable | To apply WMM parameters for wireless data transmission, please click the Enable radio button. |
| APSD Capable | APSD (automatic power-save delivery) is an enhancement over the power-save mechanisms supported by Wi-Fi networks. It allows devices to take more time in sleeping state and consume less power to improve the performance by minimizing transmission latency. The default setting is Disable . |
| Aifsn | It controls how long the client waits for each data transmission. Please specify the value ranging from 1 to 15. Such parameter will influence the time delay for WMM accessing categories. For the service of voice or video image, please set small value for AC_VI and AC_VO categories For the service of e-mail or web browsing, please set large value for AC_BE and AC_BK categories. |
| CWMin/CWMax | CWMin means contention Window-Min and CWMax means contention Window-Max. Please specify the value ranging from 1 to 15. Be aware that CWMax value must be greater than CWMin or equals to CWMin value. Both values will influence the time delay for WMM accessing categories. The difference between AC_VI and AC_VO categories must be smaller; however, the difference between AC_BE and AC_BK categories must be greater. |

| | |
|------------------|--|
| Txop | It means transmission opportunity. For WMM categories of AC_VI and AC_VO that need higher priorities in data transmission, please set greater value for them to get highest transmission opportunity. Specify the value ranging from 0 to 65535. |
| ACM | It is an abbreviation of Admission control Mandatory. It can restrict stations from using specific category class if it is checked. Note: VigorAP 902 provides standard WMM configuration in the web page. If you want to modify the parameters, please refer to the Wi-Fi WMM standard specification. |
| AckPolicy | “Uncheck” (default value) the box means the AP will answer the response request while transmitting WMM packets through wireless connection. It can assure that the peer must receive the WMM packets. “Check” the box means the AP will not answer any response request for the transmitting packets. It will have better performance with lower reliability. |

After finishing this web page configuration, please click **OK** to save the settings.

3.10.8 Bandwidth Management

The downstream or upstream from FTP, HTTP or some P2P applications will occupy large of bandwidth and affect the applications for other programs. Please use Bandwidth Management to make the bandwidth usage more efficient.

Wireless LAN (5GHz) >> Bandwidth Management

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|------------------------------------|-------------------------------------|-----------------|------------------------|
| SSID | | DrayTek5G-LAN-A | |
| Per Station Bandwidth Limit | | | |
| Enable | <input checked="" type="checkbox"/> | | |
| Upload Limit | User defined | K | bps (Default unit : K) |
| Download Limit | User defined | K | bps (Default unit : K) |
| Auto Adjustment | <input type="checkbox"/> | | |

Note :
 1. Download : Traffic going to any station. Upload : Traffic being sent from a wireless station.
 2. Allow auto adjustment could make the best utilization of available bandwidth.

Available settings are explained as follows:

| Item | Description |
|---------------------|--|
| SSID | Display the specific SSID name. |
| Enable | Check this box to enable the bandwidth management for clients. |
| Upload Limit | Define the maximum speed of the data uploading which will be used for the wireless stations connecting to VigorAP with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |

| | |
|-----------------------------|---|
| Download Limit | Define the maximum speed of the data downloading which will be used for the wireless station connecting to VigorAP with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Auto Adjustment | Check this box to have the bandwidth limit determined by the system automatically. |
| Total Upload Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data uploading. |
| Total Download Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data downloading. |

After finishing this web page configuration, please click **OK** to save the settings.

3.10.9 Airtime Fairness

Airtime fairness is essential in wireless networks that must support critical enterprise applications.

Most of the applications are either symmetric or require more downlink than uplink capacity; telephony and email send the same amount of data in each direction, while video streaming and web surfing involve more traffic sent from access points to clients than the other way around. This is essential for ensuring predictable performance and quality-of-service, as well as allowing 802.11n and legacy clients to coexist on the same network. Without airtime fairness, offices using mixed mode networks risk having legacy clients slow down the entire network or letting the fastest client(s) crowd out other users.

With airtime fairness, every client at a given quality-of-service level has equal access to the network's airtime.


After finishing this web page configuration, please click **OK** to save the settings.

The wireless channel can be accessed by only one wireless station at the same time.

The principle behind the IEEE802.11 channel access mechanisms is that each station has **equal probability** to access the channel. When wireless stations have similar data rate, this principle leads to a fair result. In this case, stations get similar channel access time which is called airtime.

However, when stations have various data rate (e.g., 11g, 11n), the result is not fair. The slow stations (11g) work in their slow data rate and occupy too much airtime, whereas the fast stations (11n) become much slower.

Take the following figure as an example, both Station A(11g) and Station B(11n) transmit data packets through VigorAP 902. Although they have equal probability to access the wireless channel, Station B(11n) gets only a little airtime and waits too much because Station A(11g) spends longer time to send one packet. In other words, Station B(fast rate) is obstructed by Station A(slow rate).

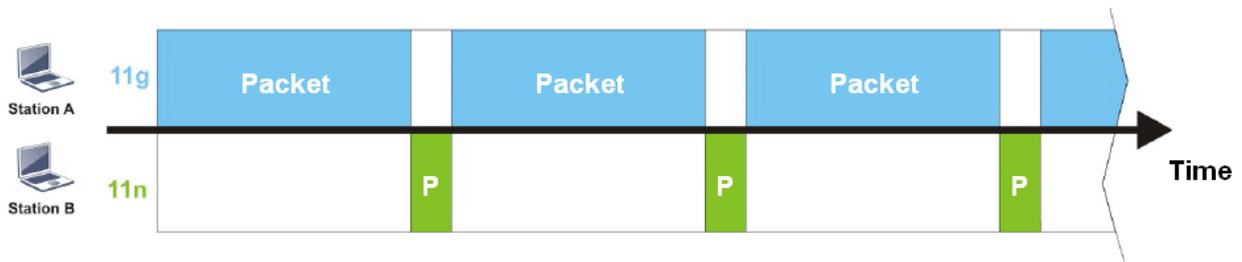

To improve this problem, Airtime Fairness is added for VigorAP 902. Airtime Fairness function tries to assign *similar airtime* to each station (A/B) by controlling TX traffic. In the following figure, Station B(11n) has higher probability to send data packets than Station A(11g). By this way, Station B(fast rate) gets fair airtime and it's speed is not limited by Station A(slow rate).



It is similar to automatic Bandwidth Limit. The dynamic bandwidth limit of each station depends on instant active station number and airtime assignment. Please note that Airtime Fairness of 2.4GHz and 5GHz are independent. But stations of different SSIDs function together, because they all use the same wireless channel. IN SPECIFIC ENVIRONMENTS, this function can reduce the bad influence of slow wireless devices and improve the overall wireless performance.

Suitable environment:

- (1) Many wireless stations.
- (2) All stations mainly use download traffic.
- (3) The performance bottleneck is wireless connection.


Wireless LAN (5GHz) >> Airtime Fairness

Enable **Airtime Fairness**
 Triggering Client Number (2 ~ 64, default: 2)

Note: Please enable or disable this function according to the real situation and user experience. It is NOT suitable for all environments. You could check [Diagnostics >> Station Airtime](#) Graph first.

Available settings are explained as follows:

| Item | Description |
|--------------------------------|---|
| Enable Airtime Fairness | Try to assign similar airtime to each wireless station by controlling TX traffic. Airtime Fairness – Click the link to display the following screen of airtime fairness note. |

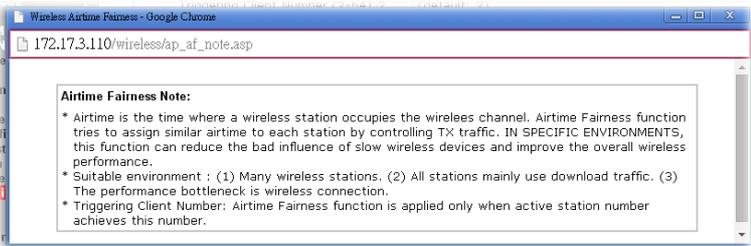

Triggering Client Number –Airtime Fairness function is applied only when active station number achieves this number.

After finishing this web page configuration, please click **OK** to save the settings.

Note: Airtime Fairness function and Bandwidth Limit function should be mutually exclusive. So their webs have extra actions to ensure these two functions are not enabled simultaneously.

3.10.10 Station Control

Station Control is used to specify the duration for the wireless client to connect and reconnect VigorAP. If such function is not enabled, the wireless client can connect VigorAP until it shuts down.

Such feature is especially useful for free Wi-Fi service. For example, a coffee shop offers free Wi-Fi service for its guests for one hour every day. Then, the connection time can be set as “1 hour” and reconnection time can be set as “1 day”. Thus, the guest can finish his job within one hour and will not occupy the wireless network for a long time.

Note: Up to 300 Wireless Station records are supported by VigorAP.

Wireless LAN (5GHz) >> Station Control

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------------------------|-----------------|--------|
| SSID | | DrayTek5G-LAN-A | |
| Enable | <input type="checkbox"/> | | |
| Connection Time | 1 hour | | |
| Reconnection Time | 1 day | | |
| Display All Station Control List | | | |

Note: Once the feature is enabled, the connection time quota will apply to each wireless client (identified by MAC address).

Available settings are explained as follows:

| Item | Description |
|--|--|
| SSID | Display the SSID that the wireless station will use it to connect with Vigor router. |
| Enable | Check the box to enable the station control function. |
| Connection Time / Reconnection Time | Use the drop down list to choose the duration for the wireless client connecting /reconnecting to Vigor router. Or, type the duration manually when you choose User defined . |

| | |
|---|---|
| | <div style="border: 1px solid black; padding: 5px;"> <div style="display: flex; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;">1 day</div> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;">1440</div> <div>min</div> </div> <ul style="list-style-type: none"> User defined 30 min 1 hour 2 hours 4 hours <li style="background-color: #e0e0e0;">1 day 2 days 3 days 4 days 5 days 6 days 7 days </div> |
| Display All Station Control List | All the wireless stations connecting to Vigor router by using such SSID will be listed on Station Control List. |

After finishing all the settings here, please click **OK** to save the configuration.

3.10.11 Roaming

The network signal for a single wireless access point might be limited by its coverage range. Therefore, if you want to expand the wireless network in a large exhibition with a quick method, you can install multiple access points with enabling the Roaming feature for each AP to reach the purpose of expanding wireless signals seamlessly.

These access points connecting for each other shall be verified by pre-authentication. This page allows you to enable the roaming feature and the pre-authentication.

Wireless LAN (2.4GHz) >> Roaming

AP-assisted Client Roaming Parameters

Minimum Basic Rate

Mbps

Disable RSSI Requirement

Strictly Minimum RSSI

dBm (%) (Default: -73)

Minimum RSSI

dBm (%) (Default: -66)

dB (Default: 5)

Fast Roaming(WPA2/802.1x)

Enable

PMK Caching : Cache Period minutes (10 ~ 600, Default: 10)

Pre-Authentication

Available settings are explained as follows:

| Item | Description |
|--|---|
| AP-assisted Client Roaming Parameters | <p>When the link rate of wireless station is too low or the signal received by the wireless station is too worse, VigorAP 902 will automatically detect (based on the link rate and RSSI requirement) and cut off the network connection for that wireless station to assist it to connect another Wireless AP to get better signal.</p> <p>Minimum Basic Rate – Check the box to use the drop down list to specify a basic rate (Mbps). When the link rate of the wireless</p> |

| | |
|--|--|
| | <p>station is below such value, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Disable RSSI Requirement - If it is selected, VigorAP will not terminate the network connection based on RSSI.</p> <p>Strictly Minimum RSSI - VigorAP uses RSSI (received signal strength indicator) to decide to terminate the network connection of wireless station. When the signal strength is below the value (dBm) set here, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Minimum RSSI - When the signal strength of the wireless station is below the value (dBm) set here and adjacent AP (must be DrayTek AP and support such feature too) with higher signal strength value (defined in the field of With Adjacent AP RSSI over) is detected by VigorAP 902, VigorAP 902 will terminate the network connection for that wireless station. Later, the wireless station can connect to the adjacent AP (with better RSSI).</p> <ul style="list-style-type: none"> ● With Adjacent AP RSSI over – Specify a value as a threshold. |
| <p>Fast Roaming (WPA2/802.1x)</p> | <p>Enable – Check the box to enable fast roaming configuration.</p> <p>PMK Cache Period - Set the expire time of WPA2 PMK (Pairwise master key) cache. PMK Cache manages the list from the BSSIDs in the associated SSID with which it has pre-authenticated. Such feature is available for WPA2/802.1 mode.</p> <p>Pre-Authentication - Enables a station to authenticate to multiple APs for roaming securer and faster. With the pre-authentication procedure defined in IEEE 802.11i specification, the pre-four-way-handshake can reduce handoff delay perceivable by a mobile node. It makes roaming faster and more secure. (Only valid in WPA2)</p> <p>Enable - Enable IEEE 802.1X Pre-Authentication.</p> <p>Disable - Disable IEEE 802.1X Pre-Authentication.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.10.12 Station List

Station List provides the knowledge of connecting wireless clients now along with its status code. Each tab (general, advanced, control, neighbor) will display different status information (including MAC address, Vendor, SSID, Auth, Encrypt, Tx/Rx Rate, Hostname, RSSI, Link Speed, BW, PSM, WMM, PHMd, MCS, Connection Time, Reconnection Time, Approx. Distance, Visit Time, and so on).

General

Display general information (e.g., MAC Address, SSID, Auth, Encrypt, TX/RX Rate) for the station.

Wireless LAN (5GHz) >> Station List

Station List

| | | General | Advanced | Control | Neighbor | | | |
|---------|-------------|----------|----------|---------|----------|---------|----------------|----------------|
| Index | MAC Address | Hostname | Vendor | SSID | Auth | Encrypt | Tx Rate (Kbps) | Rx Rate (Kbps) |
| | | | | | | | | |
| Refresh | | | | | | | | |

Add to Access Control:

Client's MAC Address : : : : : :

Add

Available settings are explained as follows:

| Item | Description |
|------------------------------|---|
| MAC Address | Display the MAC Address for the connecting client. |
| Hostname | Display the host name of the connecting client. |
| SSID | Display the SSID that the wireless client connects to. |
| Auth | Display the authentication that the wireless client uses for connection with such AP. |
| Encrypt | Display the encryption mode used by the wireless client. |
| Tx Rate/Rx Rate | Display the transmission /receiving rate for packets. |
| Refresh | Click this button to refresh the status of station list. |
| Add to Access Control | Client's MAC Address - For additional security of wireless access, the Access Control facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. |
| Add | Click this button to add current typed MAC address into Access Control. |

Advanced

Display more information (e.g., AID, PSM, WMM, RSSI PhMd, BW, MCS, Rate) for the station.

Control

Display connection and reconnection time of the wireless stations.

Neighbor

Display more information for the neighboring wireless stations.

3.11 Wireless LAN (5GHz) Settings for AP Bridge-WDS Mode

When you choose AP Bridge-WDS as the operation mode, the Wireless LAN menu items will include General Setup, Security, Access Control, WPS, Advanced Setting, AP Discovery, WDS AP Status, WMM Configuration, Bandwidth Management, Airtime Fairness, Station Control, Roaming, Band Steering and Station List.



3.11.1 General Setup

By clicking the **General Setup**, a new web page will appear so that you could configure security, Tx Burst and choose proper mode. Please refer to the following figure for more information.

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Client Limit (3 ~ 64, default: 64)

Enable Client Limit per SSID (3 ~ 64, default: 64)

Mode : (v)

Channel : (v) (Active Channel: 100)

Details : [DFS] 20 MHz, 40 MHz (ExtCh: 104), 80 MHz (CentCh: 106)

Enable 2 Subnet (Simulate 2 APs)

| | Enable | Hide SSID | SSID | Subnet | Isolate LAN | Isolate Member (0:Untagged) | VLAN ID |
|---|--------------------------|--------------------------|--|--|--------------------------|-----------------------------|--------------------------------|
| 1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="MK-902-mamie"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="DrayTek5G-LAN-B"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 3 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 4 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |

Hide SSID: Prevent SSID from being scanned.

Isolate LAN: Wireless clients (stations) with the same SSID cannot access wired PCs on LAN.

Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.


Note: Enter the configuration of APs which AP902 want to connect.
Remote AP should always use LAN-A or SSID1 MAC address to connect AP902 WDS.

PHY Mode : HTMIX

| | |
|---|---|
| <p>1. Subnet <input type="text" value="LAN-A"/> (v) Security:</p> <p><input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES</p> <p>Key : <input type="text"/></p> <p>Peer MAC Address:</p> <p><input type="text"/> : <input type="text"/></p> | <p>3. Subnet <input type="text" value="LAN-A"/> (v) Security:</p> <p><input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES</p> <p>Key : <input type="text"/></p> <p>Peer MAC Address:</p> <p><input type="text"/> : <input type="text"/></p> |
| <p>2. Subnet <input type="text" value="LAN-A"/> (v) Security:</p> <p><input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES</p> <p>Key : <input type="text"/></p> <p>Peer MAC Address:</p> <p><input type="text"/> : <input type="text"/></p> | <p>4. Subnet <input type="text" value="LAN-A"/> (v) Security:</p> <p><input checked="" type="radio"/> Disabled <input type="radio"/> WEP <input type="radio"/> TKIP <input type="radio"/> AES</p> <p>Key : <input type="text"/></p> <p>Peer MAC Address:</p> <p><input type="text"/> : <input type="text"/></p> |

Available settings are explained as follows:

| Item | Description |
|-------------------------------------|---|
| Enable Wireless LAN | Check the box to enable wireless function. |
| Enable Client Limit | Check the box to set the maximum number of wireless stations which try to connect Internet through VigorAP. The number you can set is from 3 to 64. |
| Enable Client Limit per SSID | Define the maximum number of wireless stations per SSID which try to connect to Internet through Vigor device. The number you can set is from 3 to 64. |
| Mode | At present, VigorAP 902 can connect to 11a only, 11n only (5G), Mixed (11a+11n) and Mixed (11a+11n+11ac) stations simultaneously. Simply choose Mixed (11a+11n+11a) mode. |
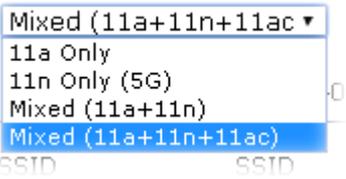
| | |
|------------------------|--|
| |  |
| Channel | Means the channel of frequency of the wireless LAN. You may switch channel if the selected channel is under serious interference. If you have no idea of choosing the frequency, please select AutoSelect to let system determine for you. |
| Enable 2 Subnet | <p>Check the box to enable the function for two independent subnets. Once you enable this function, LAN-A and LAN-B would be independent. Next, you can connect one router in LAN-A, and another router in LAN-B. Such mechanism can make you feeling that you have two independent AP/subnet functions in one VigorAP 902.</p> <p>If you disable this function, LAN-A and LAN-B ports are in the same domain. You could only connect one router (no matter connecting to LAN-A or LAN-B) in this environment.</p> |
| Enable | Check the box to enable the SSID configuration. |
| Hide SSID | Check it to prevent from wireless sniffing and make it harder for unauthorized clients or STAs to join your wireless LAN. Depending on the wireless utility, the user may only see the information except SSID or just cannot see any thing about VigorAP 902 while site surveying. The system allows you to set four sets of SSID for different usage. |
| SSID | Set a name for VigorAP 902 to be identified. Default settings are DrayTek5G-LAN-A and DrayTek5G-LAN-B. When Enable 2 Subnet is enabled, you can specify subnet interface (LAN-A or LAN-B) for each SSID by using the drop down menu. |
| Subnet | Choose LAN-A or LAN-B for each SSID. If you choose LAN-A, the wireless clients connecting to this SSID could only communicate with LAN-A. |
| Isolate LAN | Check this box to make the wireless clients (stations) with the same SSID not accessing for wired PC in LAN. |
| Isolate Member | Check this box to make the wireless clients (stations) with the same SSID not accessing for each other. |
| VLAN ID | <p>Type the value for such SSID. Packets transferred from such SSID to LAN will be tagged with the number.</p> <p>If your network uses VLANs, you can assign the SSID to a VLAN on your network. Client devices that associate using the SSID are grouped into this VLAN. The VLAN ID range is from 3 to 4095. The VLAN ID is 0 by default, it means disabling the VLAN function for the SSID.</p> |
| PHY Mode | <p>Data will be transmitted via HTMIX mode.</p> <p>Each access point should be setup to the same Phy Mode for</p> |

| | |
|-------------------------|---|
| | connecting with each other. |
| Security | Select WEP, TKIP or AES as the encryption algorithm. Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). |
| Peer MAC Address | Type the peer MAC address for the access point that VigorAP 902 connects to. |

After finishing this web page configuration, please click **OK** to save the settings.

3.11.2 Security


This page allows you to set security with different modes for SSID 1, 2, 3 and 4 respectively. After configuring the correct settings, please click **OK** to save and invoke it.


By clicking the **Security Settings**, a new web page will appear so that you could configure the settings.

Wireless LAN (5GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|---|----------------------|--|--------------------------|
| SSID | | MK-902-mamie | |
| Mode | | Mixed(WPA+WPA2)/PSK | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | |
| Pass Phrase | | <input type="text" value="*****"/> | |
| Key Renewal Interval | | <input type="text" value="3600"/> seconds | |
| EAPOL Key Retry | | <input checked="" type="radio"/> Enable <input type="radio"/> Disable | |
| WEP | | | |
| <input checked="" type="radio"/> Key 1 : | <input type="text"/> | <input type="text"/> | Hex <input type="text"/> |
| <input type="radio"/> Key 2 : | <input type="text"/> | <input type="text"/> | Hex <input type="text"/> |
| <input type="radio"/> Key 3 : | <input type="text"/> | <input type="text"/> | Hex <input type="text"/> |
| <input type="radio"/> Key 4 : | <input type="text"/> | <input type="text"/> | Hex <input type="text"/> |
| 802.1x WEP | | <input type="radio"/> Disable <input checked="" type="radio"/> Enable | |

Available settings are explained as follows:
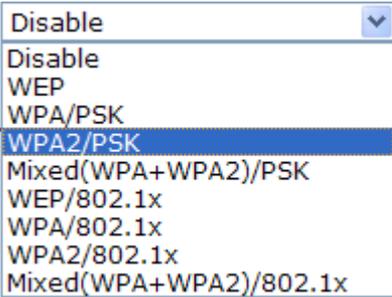
| Item | Description |
|-------------|--|
| Mode | <p>There are several modes provided for you to choose.</p>  <p>Disable - The encryption mechanism is turned off.</p> <p>WEP - Accepts only WEP clients and the encryption key should be entered in WEP Key.</p> <p>WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK - Accepts only WPA clients and the encryption key should be entered in PSK. The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WEP/802.1x - The built-in RADIUS client feature enables VigorAP 902 to assist the remote dial-in user or a wireless station and the RADIUS server in performing mutual</p> |

| | |
|-----------------------------|--|
| | <p>authentication. It enables centralized remote access authentication for network management.</p> <p>The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication. Select WPA, WPA2 or Auto as WPA mode.</p> <p>WPA/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WPA2/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> |
| WPA Algorithms | Select TKIP, AES or TKIP/AES as the algorithm for WPA. Such feature is available for WPA2/802.1x, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Pass Phrase | Either 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). Such feature is available for WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Key Renewal Interval | WPA uses shared key for authentication to the network. However, normal network operations use a different encryption key that is randomly generated. This randomly generated key that is periodically replaced. Enter the renewal security time (seconds) in the column. Smaller interval leads to greater security but lower performance. Default is 3600 seconds. Set 0 to disable re-key. Such feature is available for WPA2/802.1, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| EAPOL Key Retry | EAPOL means Extensible Authentication Protocol over LAN. Click Enable to make sure that the key will be installed and used once in order to prevent key reinstallation attack. |
| Key 1 – Key 4 | <p>Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(-) except '#' and ','. Such feature is available for WEP mode.</p>  |
| 802.1x WEP | <p>Disable - Disable the WEP Encryption. Data sent to the AP will not be encrypted.</p> <p>Enable - Enable the WEP Encryption.</p> <p>Such feature is available for WEP/802.1x mode.</p> |

Click the link of **RADIUS Server** to access into the following page for more settings.

Radius Server

Use internal RADIUS Server

IP Address

Port

Shared Secret

Session Timeout second(s)

Available settings are explained as follows:

| Item | Description |
|-----------------------------------|--|
| Use internal RADIUS Server | There is a RADIUS server built in VigorAP 902 which is used to authenticate the wireless client connecting to the access point. Check this box to use the internal RADIUS server for wireless security. Besides, if you want to use the external RADIUS server for authentication, do not check this box. Please refer to the section, 3.13 RADIUS Server to configure settings for internal server of VigorAP 902. |
| IP Address | Enter the IP address of external RADIUS server. |
| Port | The UDP port number that the external RADIUS server is using. The default value is 1812, based on RFC 2138. |
| Shared Secret | The external RADIUS server and client share a secret that is used to authenticate the messages sent between them. Both sides must be configured to use the same shared secret. |
| Session Timeout | Set the maximum time of service provided before re-authentication. Set to zero to perform another authentication immediately after the first authentication has successfully completed. (The unit is second.) |

After finishing this web page configuration, please click **OK** to save the settings.

3.11.3 Access Control

For additional security of wireless access, the **Access Control** facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. By clicking the **Access Control**, a new web page will appear, as depicted below, so that you could edit the clients' MAC addresses to control their access rights (deny or allow).

Wireless LAN (5GHz) >> Access Control

SSID 1 | SSID 2 | SSID 3 | SSID 4

SSID: DrayTek5G-LAN-A
Policy:

MAC Address Filter


| Index | MAC Address |
|-------|-------------|
| | |

Client's MAC Address : : : : : :

Limit:256 entries

Backup ACL Cfg : Upload From File: 未選擇任何檔案

Available settings are explained as follows:
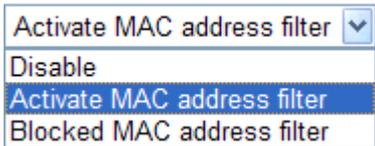
| Item | Description |
|-----------------------------|---|
| Policy | Select to enable any one of the following policy or disable the policy. Choose Activate MAC address filter to type in the MAC addresses for other clients in the network manually. Choose Blocked MAC address filter , so that all of the devices with the MAC addresses listed on the MAC Address Filter table will be blocked and cannot access into VigorAP 902.  |
| MAC Address Filter | Display all MAC addresses that are edited before. |
| Client's MAC Address | Manually enter the MAC address of wireless client. |
| Add | Add a new MAC address into the list. |
| Delete | Delete the selected MAC address in the list. |
| Edit | Edit the selected MAC address in the list. |
| Cancel | Give up the access control set up. |
| Backup | Click it to store the settings (MAC addresses on MAC Address |

| | |
|----------------|--|
| | Filter table) on this page as a file. |
| Restore | Click it to restore the settings (MAC addresses on MAC Address Filter table) from an existed file. |

After finishing this web page configuration, please click **OK** to save the settings.

3.11.4 WPS

Open **Wireless LAN>>WPS** to configure the corresponding settings.

Wireless LAN (5GHz) >> WPS (Wi-Fi Protected Setup)

Enable WPS 

Wi-Fi Protected Setup Information

| | |
|-------------------------|---------------------|
| WPS Configured | Yes |
| WPS SSID | DrayTek5G-LAN-A |
| WPS Auth Mode | Mixed(WPA+WPA2)/PSK |
| WPS Encrypt Type | TKIP/AES |

Device Configure

| | |
|-------------------------------------|---|
| Configure via Push Button | <input type="button" value="Start PBC"/> |
| Configure via Client PinCode | <input type="text"/> <input type="button" value="Start PIN"/> |

Status: Not used

Note: WPS can help your wireless client automatically connect to the Access point.

: WPS is Disabled.

: WPS is Enabled.

: Waiting for WPS requests from wireless clients.

Available settings are explained as follows:

| Item | Description |
|-------------------------------------|---|
| Enable WPS | Check this box to enable WPS setting. |
| WPS Configured | Display related system information for WPS. If the wireless security (encryption) function of VigorAP 902 is properly configured, you can see 'Yes' message here. |
| WPS SSID | Display current selected SSID. |
| WPS Auth Mode | Display current authentication mode of the VigorAP 902r. Only WPA2/PSK and WPA/PSK support WPS. |
| WPS Encrypt Type | Display encryption mode (None, WEP, TKIP, AES, etc.) of VigorAP 902. |
| Configure via Push Button | Click Start PBC to invoke Push-Button style WPS setup procedure. VigorAP 902 will wait for WPS requests from wireless clients about two minutes. Both ACT and 2.4G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes) |
| Configure via Client PinCode | Type the PIN code specified in wireless client you wish to connect, and click Start PIN button. Both ACT and 2.4G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes). |

3.11.5 Advanced Setting


This page is to determine which algorithm will be selected for wireless transmission rate.

Wireless LAN (5GHz) >> Advanced Setting

| | |
|--------------------------------|--|
| Channel Width | <input type="radio"/> 20 MHz <input type="radio"/> Auto 20/40 MHz <input checked="" type="radio"/> Auto 20/40/80 MHz |
| Tx Power | <input checked="" type="radio"/> 100% <input type="radio"/> 80% <input type="radio"/> 60% <input type="radio"/> 30% <input type="radio"/> 20% <input type="radio"/> 10% |
| Rate Adaptation Algorithm | <input checked="" type="radio"/> New <input type="radio"/> Old |
| Fragment Length (256 - 2346) | 2346 bytes |
| RTS Threshold (1 - 2347) | 2347 bytes |
| Country Code | <input type="text"/> (Reference) |
| Auto Channel Filtered Out List | <input type="checkbox"/> 36 <input type="checkbox"/> 40 <input type="checkbox"/> 44 <input type="checkbox"/> 48 <input type="checkbox"/> 52 <input type="checkbox"/> 56 <input type="checkbox"/> 60 <input type="checkbox"/> 64 <input type="checkbox"/> 100 <input type="checkbox"/> 104 <input type="checkbox"/> 108 <input type="checkbox"/> 112 <input type="checkbox"/> 116 <input type="checkbox"/> 120 <input type="checkbox"/> 124 <input type="checkbox"/> 128 <input type="checkbox"/> 132 <input type="checkbox"/> 136 <input type="checkbox"/> 140 |
| Isolate 2.4GHz and 5GHz bands | <input checked="" type="radio"/> Enable <input type="radio"/> Disable |
| Isolate members with IP | <input type="radio"/> Enable <input checked="" type="radio"/> Disable |

OK Cancel

Available settings are explained as follows:

| Item | Description |
|----------------------------------|--|
| Channel Width | <p>20 MHz- the AP will use 20MHz for data transmission and receiving between the AP and the stations.</p> <p>Auto 20/40 MHz- the AP will scan for nearby wireless AP, and then use 20MHz if the number of AP is more than 10, or use 40MHz if it's not.</p> <p>Auto 20/40/80 MHz- the AP will use 20MHz or 40MHz or 80MHz for data transmission and receiving according to the station capability. Such channel can increase the performance for data transmission.</p> |
| Tx Power | <p>The default setting is the maximum (100%). Lowering down the value may degrade range and throughput of wireless.</p>  |
| Rate Adaptation Algorithm | Wireless transmission rate is adapted dynamically. Usually, performance of “new” algorithm is better than “old”. |
| Fragment Length | Set the Fragment threshold of wireless radio. Do not modify default value if you don't know what it is, default value is 2346. |
| RTS Threshold | <p>Minimize the collision (unit is bytes) between hidden stations to improve wireless performance.</p> <p>Set the RTS threshold of wireless radio. Do not modify default value if you don't know what it is, default value is 2347.</p> |

| | |
|---------------------------------------|--|
| Country Code | VigorAP broadcasts country codes by following the 802.11d standard. However, some wireless stations will detect / scan the country code to prevent conflict occurred. If conflict is detected, wireless station will be warned and is unable to make network connection. Therefore, changing the country code to ensure successful network connection will be necessary for some clients. |
| Auto Channel Filtered Out List | The selected wireless channels will be discarded if AutoSelect is selected as Channel selection mode in Wireless LAN>>General Setup . |
| Isolate 2.4GHz and 5GHz bands | <p>The default setting is “Enable”. It means that the wireless client using 2.4GHz band is unable to connect to the wireless client with 5GHz band, and vice versa.</p> <p>For WLAN 2.4GHz and 5GHz set with the same SSID name:</p> <ul style="list-style-type: none"> ● No matter such function is enabled or disabled, clients using WLAN 2.4GHz and 5GHz can communicate for each other if Isolate Member (in Wireless LAN>>General Setup) is NOT enabled for such SSID. ● Yet, if the function of Isolate Member (in Wireless LAN>>General Setup) is enabled for such SSID, clients using WLAN 2.4GHz and 5GHz will be unable to communicate with each other. |
| Isolate members with IP | <p>The default setting is “Disable”.</p> <p>If it is enabled, VigorAP will isolate different wireless clients according to their IP address(es).</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.11.6 AP Discovery

VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. Based on the scanning result, users will know which channel is clean for usage. Also, it can be used to facilitate finding an AP for a WDS link. Notice that during the scanning process (about 5 seconds), no client is allowed to connect to Vigor.

This page is used to scan the existence of the APs on the wireless LAN. Yet, only the AP which is in the same channel of VigorAP 902 can be found. Please click **Scan** to discover all the connected APs.

Access Point List

 Enable AP Monitor Mode

| Index | SSID | BSSID | RSSI | Channel | Encryption | Authentication | Mode | Ch. Width | Last Detected |
|-------|---------------|-------------------|------|---------|------------|---------------------|----------|-----------|-----------------|
| 1 | Draytek5G | 00:1d:aa:7f:5d:5a | 24% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 20 | Jan 1, 21:13:27 |
| 2 | ssid5g3 | 02:1d:aa:7f:5d:5a | 26% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 20 | Jan 1, 21:13:27 |
| 3 | v2860 5g 1 | 00:1d:aa:86:ba:d2 | 15% | 36 | AES | WPA2/PSK | 11a/n/ac | 40 | Jan 1, 21:13:27 |
| 4 | Hotpost_5G... | 02:1d:aa:cb:a3:12 | 63% | 36 | NONE | | 11a/n | 40 | Jan 1, 21:13:27 |
| 5 | Draytek5G | 00:1d:aa:7f:5d:8e | 7% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 20 | Jan 1, 21:13:27 |
| 6 | v2860 5g 2 | 02:1d:aa:86:ba:d2 | 13% | 36 | AES | WPA2/PSK | 11a/n/ac | 40 | Jan 1, 21:13:27 |
| 7 | Hotspot_5G... | 00:1d:aa:cb:a3:12 | 63% | 36 | NONE | | 11a/n | 40 | Jan 1, 21:13:27 |
| 8 | PQC_5G | 00:1d:aa:3d:4f:15 | 13% | 40 | NONE | | 11a/n/ac | 80 | Jan 1, 21:13:27 |
| 9 | V2860-Smar... | 00:1d:aa:5d:ca:c2 | 47% | 48 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 80 | Jan 1, 21:13:27 |
| 10 | | 00:1d:aa:54:b1:3a | 2% | 48 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n | 40 | Jan 1, 21:13:27 |
| 11 | 910-MK-mam... | 00:1d:aa:7c:cf:a6 | 81% | 64 | NONE | | 11a/n/ac | 80 | Jan 1, 21:13:27 |
| 12 | 910-MK-mam... | 02:1d:aa:7c:cf:a6 | 81% | 64 | NONE | | 11a/n/ac | 80 | Jan 1, 21:13:27 |
| 13 | IEFP-Entra... | 00:1d:aa:d0:ee:b2 | 15% | 108 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 80 | Jan 1, 21:13:27 |

Scan

See [Channel Interference](#).**Note:** During the scanning process (about 5 seconds), no station is allowed to connect with the AP.

Each item is explained as follows:

| Item | Description |
|-------------------------------|--|
| Enable AP Monitor Mode | This function can help to get and keep the records of APs detected by such device after clicking Scan. In general, only the available AP will be detected by Vigor device. Once the AP is unavailable, it will be deleted from the Access Point List immediately. However, if such function is enabled, the system will keep the record of the AP (once detected by Vigor device) until it is available for Vigor device again. |
| SSID | Display the SSID of the AP scanned by VigorAP 902. |
| BSSID | Display the MAC address of the AP scanned by VigorAP 902. |
| RSSI | Display the signal strength of the access point. RSSI is the abbreviation of Received Signal Strength Indication. |
| Channel | Display the wireless channel used for the AP that is scanned by VigorAP 902. |
| Encryption | Display the encryption mode for the scanned AP. |
| Authentication | Display the authentication type that the scanned AP applied. |
| Mode | Display the wireless connection mode that the scanned AP used. |
| Ch. Width | Display the channel width that the scanned AP used. |
| Scan | It is used to discover all the connected AP. The results will be shown on the box above this button |
| Channel Interference | Access into Diagnostics>>Interference Monitor for viewing interference status for channel(s). |

3.11.7 WDS AP Status

VigorAP 902 can display the status such as MAC address, physical mode, power save and bandwidth for the working AP connected with WDS. Click **Refresh** to get the newest information.

Wireless LAN (5GHz) >> WDS AP Status

WDS AP List

| AID | MAC Address | 802.11 Physical Mode | Power Save | Bandwidth |
|-----|-------------|----------------------|------------|-----------|
|-----|-------------|----------------------|------------|-----------|

3.11.8 WMM Configuration

WMM is an abbreviation of Wi-Fi Multimedia. It defines the priority levels for four access categories derived from 802.1d (prioritization tabs). The categories are designed with specific types of traffic, voice, video, best effort and low priority data. There are four accessing categories - AC_BE , AC_BK, AC_VI and AC_VO for WMM.

Wireless LAN (5GHz) >> WMM Configuration

WMM Configuration | [Set to Factory Default](#) |

WMM Capable Enable Disable
 APSD Capable Enable Disable

WMM Parameters of Access Point

| | Aifsn | CWMin | CWMax | Txop | AckPolicy |
|-------|-------|-------|-------|------|--------------------------|
| AC_BE | 3 | 4 | 6 | 0 | <input type="checkbox"/> |
| AC_BK | 7 | 4 | 10 | 0 | <input type="checkbox"/> |
| AC_VI | 1 | 3 | 4 | 94 | <input type="checkbox"/> |
| AC_VO | 1 | 2 | 3 | 47 | <input type="checkbox"/> |

WMM Parameters of Station

| | Aifsn | CWMin | CWMax | Txop | ACM |
|-------|-------|-------|-------|------|--------------------------|
| AC_BE | 3 | 4 | 10 | 0 | <input type="checkbox"/> |
| AC_BK | 7 | 4 | 10 | 0 | <input type="checkbox"/> |
| AC_VI | 2 | 3 | 4 | 94 | <input type="checkbox"/> |
| AC_VO | 2 | 2 | 3 | 47 | <input type="checkbox"/> |

Available settings are explained as follows:

| Item | Description |
|---------------------|---|
| WMM Capable | To apply WMM parameters for wireless data transmission, please click the Enable radio button. |
| APSD Capable | APSD (automatic power-save delivery) is an enhancement over the power-save mechanisms supported by Wi-Fi networks. It allows devices to take more time in sleeping state and consume less power to improve the performance by minimizing transmission latency. The default setting is Disable . |
| Aifsn | It controls how long the client waits for each data transmission. Please specify the value ranging from 1 to 15. Such parameter will influence the time delay for WMM accessing categories. For the service of voice or video image, please set small value for AC_VI and AC_VO categories For the service of e-mail or web browsing, please set large value for AC_BE and AC_BK categories. |
| CWMin/CWMax | CWMin means contention Window-Min and CWMax means contention Window-Max. Please specify the value ranging from 1 to 15. Be aware that CWMax value must be greater than CWMin or equals to CWMin value. Both values will influence the time delay for WMM accessing categories. The difference between AC_VI and AC_VO categories must be smaller; however, the difference between AC_BE and AC_BK categories must be greater. |
| Txop | It means transmission opportunity. For WMM categories of AC_VI and AC_VO that need higher priorities in data |

| | |
|------------------|--|
| | transmission, please set greater value for them to get highest transmission opportunity. Specify the value ranging from 0 to 65535. |
| ACM | It is an abbreviation of Admission control Mandatory. It can restrict stations from using specific category class if it is checked. Note: VigorAP 902 provides standard WMM configuration in the web page. If you want to modify the parameters, please refer to the Wi-Fi WMM standard specification. |
| AckPolicy | “Uncheck” (default value) the box means the AP will answer the response request while transmitting WMM packets through wireless connection. It can assure that the peer must receive the WMM packets. “Check” the box means the AP will not answer any response request for the transmitting packets. It will have better performance with lower reliability. |

After finishing this web page configuration, please click **OK** to save the settings.

3.11.9 Bandwidth Management

The downstream or upstream from FTP, HTTP or some P2P applications will occupy large of bandwidth and affect the applications for other programs. Please use Bandwidth Management to make the bandwidth usage more efficient.

Wireless LAN (5GHz) >> Bandwidth Management

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|------------------------------------|-------------------------------------|-----------------|------------------------|
| SSID | | DrayTek5G-LAN-A | |
| Per Station Bandwidth Limit | | | |
| Enable | <input checked="" type="checkbox"/> | | |
| Upload Limit | User defined ▾ | K | bps (Default unit : K) |
| Download Limit | User defined ▾ | K | bps (Default unit : K) |
| Auto Adjustment | <input checked="" type="checkbox"/> | | |
| Total Upload Limit | User defined ▾ | K | bps (Default unit : K) |
| Total Download Limit | User defined ▾ | K | bps (Default unit : K) |

Note:
 1. Download : Traffic going to any station. Upload : Traffic being sent from a wireless station.
 2. Allow auto adjustment could make the best utilization of available bandwidth.

OK Cancel

Available settings are explained as follows:

| Item | Description |
|-----------------------------|---|
| SSID | Display the specific SSID name. |
| Enable | Check this box to enable the bandwidth management for clients. |
| Upload Limit | Define the maximum speed of the data uploading which will be used for the wireless stations connecting to VigorAP with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Download Limit | Define the maximum speed of the data downloading which will be used for the wireless station connecting to VigorAP with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Auto Adjustment | Check this box to have the bandwidth limit determined by the system automatically. |
| Total Upload Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data uploading. |
| Total Download Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data downloading. |

After finishing this web page configuration, please click **OK** to save the settings.

3.11.10 Airtime Fairness

Airtime fairness is essential in wireless networks that must support critical enterprise applications.

Most of the applications are either symmetric or require more downlink than uplink capacity; telephony and email send the same amount of data in each direction, while video streaming and web surfing involve more traffic sent from access points to clients than the other way around. This is essential for ensuring predictable performance and quality-of-service, as well as allowing 802.11n and legacy clients to coexist on the same network. Without airtime fairness, offices using mixed mode networks risk having legacy clients slow down the entire network or letting the fastest client(s) crowd out other users.


With airtime fairness, every client at a given quality-of-service level has equal access to the network's airtime.

The wireless channel can be accessed by only one wireless station at the same time.

The principle behind the IEEE802.11 channel access mechanisms is that each station has **equal probability** to access the channel. When wireless stations have similar data rate, this principle leads to a fair result. In this case, stations get similar channel access time which is called airtime.

However, when stations have various data rate (e.g., 11g, 11n), the result is not fair. The slow stations (11g) work in their slow data rate and occupy too much airtime, whereas the fast stations (11n) become much slower.

Take the following figure as an example, both Station A(11g) and Station B(11n) transmit data packets through VigorAP 902. Although they have equal probability to access the wireless channel, Station B(11n) gets only a little airtime and waits too much because Station A(11g) spends longer time to send one packet. In other words, Station B(fast rate) is obstructed by Station A(slow rate).

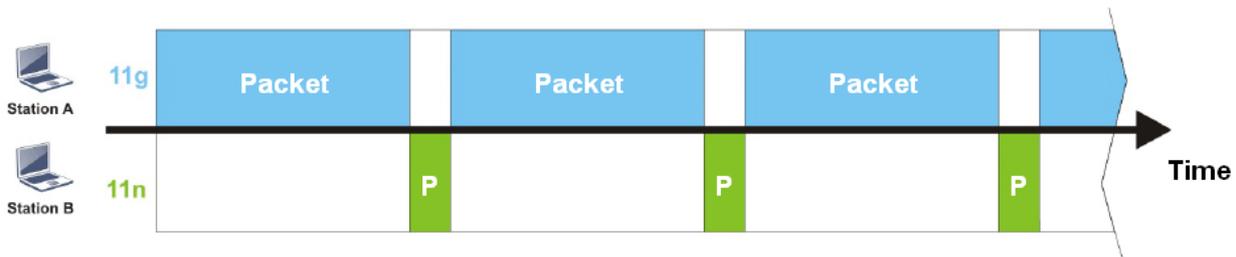

To improve this problem, Airtime Fairness is added for VigorAP 902. Airtime Fairness function tries to assign *similar airtime* to each station (A/B) by controlling TX traffic. In the following figure, Station B(11n) has higher probability to send data packets than Station A(11g). By this way, Station B(fast rate) gets fair airtime and it's speed is not limited by Station A(slow rate).



It is similar to automatic Bandwidth Limit. The dynamic bandwidth limit of each station depends on instant active station number and airtime assignment. Please note that Airtime Fairness of 2.4GHz and 5GHz are independent. But stations of different SSIDs function together, because they all use the same wireless channel. IN SPECIFIC ENVIRONMENTS, this function can reduce the bad influence of slow wireless devices and improve the overall wireless performance.

Suitable environment:

- (1) Many wireless stations.
- (2) All stations mainly use download traffic.
- (3) The performance bottleneck is wireless connection.

Wireless LAN (5GHz) >> Airtime Fairness

Enable **Airtime Fairness**
 Triggering Client Number (2 ~ 64, default: 2)

Note: Please enable or disable this function according to the real situation and user experience. It is NOT suitable for all environments. You could check [Diagnostics >> Station Airtime](#) Graph first.

Available settings are explained as follows:

| Item | Description |
|--------------------------------|--|
| Enable Airtime Fairness | <p>Try to assign similar airtime to each wireless station by controlling TX traffic.</p> <p>Airtime Fairness – Click the link to display the following screen of airtime fairness note.</p> <div style="border: 1px solid gray; padding: 5px; margin: 5px 0;"> <p>Airtime Fairness Note:</p> <ul style="list-style-type: none"> * Airtime is the time where a wireless station occupies the wireless channel. Airtime Fairness function tries to assign similar airtime to each station by controlling TX traffic. IN SPECIFIC ENVIRONMENTS, this function can reduce the bad influence of slow wireless devices and improve the overall wireless performance. * Suitable environment : (1) Many wireless stations. (2) All stations mainly use download traffic. (3) The performance bottleneck is wireless connection. * Triggering Client Number: Airtime Fairness function is applied only when active station number achieves this number. </div> <p>Triggering Client Number –Airtime Fairness function is applied only when active station number achieves this number.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

Note: Airtime Fairness function and Bandwidth Limit function should be mutually exclusive. So their webs have extra actions to ensure these two functions are not enabled simultaneously.

3.11.11 Station Control

Station Control is used to specify the duration for the wireless client to connect and reconnect VigorAP. If such function is not enabled, the wireless client can connect VigorAP until it shuts down.

Such feature is especially useful for free Wi-Fi service. For example, a coffee shop offers free Wi-Fi service for its guests for one hour every day. Then, the connection time can be set as “1 hour” and reconnection time can be set as “1 day”. Thus, the guest can finish his job within one hour and will not occupy the wireless network for a long time.

Note: Up to 300 Wireless Station records are supported by VigorAP.


Wireless LAN (5GHz) >> Station Control

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------------------------|--------|
| SSID | | DrayTek5G-LAN-A | |
| Enable | | <input type="checkbox"/> | |
| Connection Time | | 1 hour ▼ | |
| Reconnection Time | | 1 day ▼ | |
| Display All Station Control List | | | |

Note: Once the feature is enabled, the connection time quota will apply to each wireless client (identified by MAC address).

OK Cancel

Available settings are explained as follows:
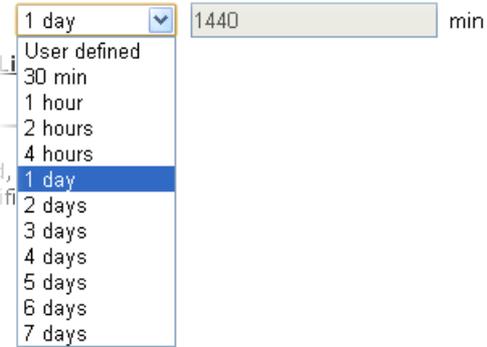
| Item | Description |
|-------------------------------------|--|
| SSID | Display the SSID that the wireless station will use it to connect with Vigor router. |
| Enable | Check the box to enable the station control function. |
| Connection Time / Reconnection Time | Use the drop down list to choose the duration for the wireless client connecting /reconnecting to Vigor router. Or, type the duration manually when you choose User defined .  |
| Display All Station Control List | All the wireless stations connecting to Vigor router by using such SSID will be listed on Station Control List. |

After finishing all the settings here, please click **OK** to save the configuration.

3.11.12 Roaming

The network signal for a single wireless access point might be limited by its coverage range. Therefore, if you want to expand the wireless network in a large exhibition with a quick method, you can install multiple access points with enabling the Roaming feature for each AP to reach the purpose of expanding wireless signals seamlessly.

These access points connecting for each other shall be verified by pre-authentication. This page allows you to enable the roaming feature and the pre-authentication.

Wireless LAN (5GHz) >> Roaming

AP-assisted Client Roaming Parameters

| | |
|---|------------------------------|
| <input type="checkbox"/> Minimum Basic Rate | 6 Mbps |
| <input checked="" type="radio"/> Disable RSSI Requirement | |
| <input checked="" type="radio"/> Strictly Minimum RSSI | -73 dBm (42%) (Default: -73) |
| <input type="radio"/> Minimum RSSI | -66 dBm (60%) (Default: -66) |
| with Adjacent AP RSSI over | 5 dB (Default: 5) |

Fast Roaming(WPA2/802.1x)

| | |
|-----------------------------------|------------------------------------|
| <input type="checkbox"/> Enable | |
| PMK Caching : Cache Period | 10 minutes (10 ~ 600, Default: 10) |
| Pre-Authentication | |

OK Cancel

Available settings are explained as follows:

| Item | Description |
|--|---|
| AP-assisted Client Roaming Parameters | <p>When the link rate of wireless station is too low or the signal received by the wireless station is too worse, VigorAP 902 will automatically detect (based on the link rate and RSSI requirement) and cut off the network connection for that wireless station to assist it to connect another Wireless AP to get better signal.</p> <p>Minimum Basic Rate – Check the box to use the drop down list to specify a basic rate (Mbps). When the link rate of the wireless station is below such value, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Disable RSSI Requirement - If it is selected, VigorAP will not terminate the network connection based on RSSI.</p> <p>Strictly Minimum RSSI - VigorAP uses RSSI (received signal strength indicator) to decide to terminate the network connection of wireless station. When the signal strength is below the value (dBm) set here, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Minimum RSSI - When the signal strength of the wireless station is below the value (dBm) set here and adjacent AP (must be DrayTek AP and support such feature too) with higher signal strength value (defined in the field of With Adjacent AP RSSI over) is detected by VigorAP 902, VigorAP 902 will terminate the network connection for that wireless station. Later, the</p> |

| | |
|--|---|
| | <p>wireless station can connect to the adjacent AP (with better RSSI).</p> <ul style="list-style-type: none"> ● With Adjacent AP RSSI over – Specify a value as a threshold. |
| <p>Fast Roaming (WPA2/802.1x)</p> | <p>Enable – Check the box to enable fast roaming configuration.</p> <p>PMK Cache Period - Set the expire time of WPA2 PMK (Pairwise master key) cache. PMK Cache manages the list from the BSSIDs in the associated SSID with which it has pre-authenticated. Such feature is available for WPA2/802.1 mode.</p> <p>Pre-Authentication - Enables a station to authenticate to multiple APs for roaming securer and faster. With the pre-authentication procedure defined in IEEE 802.11i specification, the pre-four-way-handshake can reduce handoff delay perceivable by a mobile node. It makes roaming faster and more secure. (Only valid in WPA2)</p> <p>Enable - Enable IEEE 802.1X Pre-Authentication.</p> <p>Disable - Disable IEEE 802.1X Pre-Authentication.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.11.13 Station List

Station List provides the knowledge of connecting wireless clients now along with its status code.

General

Display general information (e.g., MAC Address, SSID, Auth, Encrypt, TX/RX Rate) for the station.

Wireless LAN (5GHz) >> Station List

Station List

| | | General | Advanced | Control | Neighbor | | | |
|--|-------------|----------|----------|---------|----------|---------|----------------|----------------|
| Index | MAC Address | Hostname | Vendor | SSID | Auth | Encrypt | Tx Rate (Kbps) | Rx Rate (Kbps) |
| <div style="border: 1px solid #ccc; width: 100%; height: 100%;"></div> | | | | | | | | |
| <input type="button" value="Refresh"/> | | | | | | | | |

Add to Access Control:

Client's MAC Address : : : : : :

Available settings are explained as follows:

| Item | Description |
|------------------------------|---|
| MAC Address | Display the MAC Address for the connecting client. |
| Hostname | Display the host name of the connecting client. |
| SSID | Display the SSID that the wireless client connects to. |
| Auth | Display the authentication that the wireless client uses for connection with such AP. |
| Encrypt | Display the encryption mode used by the wireless client. |
| Tx Rate/Rx Rate | Display the transmission /receiving rate for packets. |
| Refresh | Click this button to refresh the status of station list. |
| Add to Access Control | Client's MAC Address - For additional security of wireless access, the Access Control facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. |
| Add | Click this button to add current typed MAC address into Access Control . |

Advanced

Display more information (e.g., AID, PSM, WMM, RSSI PhMd, BW, MCS, Rate) for the station.


Control

Display connection and reconnection time of the wireless stations.

Neighbor

Display more information for the neighboring wireless stations.

3.12 Wireless LAN (5GHz) Settings for Universal Repeater Mode

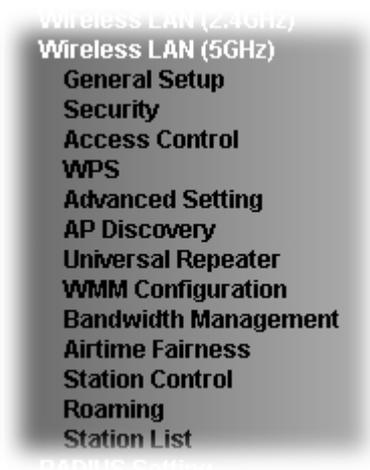

3.12.1 General Setup

By clicking the **General Setup**, a new web page will appear so that you could configure the SSID and the wireless channel.

Please refer to the following figure for more information.

Wireless LAN (5GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Client Limit (3 ~ 64, default: 64)

Enable Client Limit per SSID (3 ~ 64, default: 64)

Mode : (v)

Channel : (v) (Active Channel: 100)

Details : [DFS] 20 MHz, 40 MHz (ExtCh: 104), 80 MHz (CentCh: 106)


Enable 2 Subnet (Simulate 2 APs)

| | Enable | Hide SSID | SSID | Subnet | Isolate LAN | Isolate Member (0:Untagged) | VLAN ID |
|---|--------------------------|--------------------------|--|--|--------------------------|-----------------------------|--------------------------------|
| 1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="MK-902-mamie"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="DrayTek5G-LAN-B"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 3 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |
| 4 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text"/> | <input type="text" value="LAN-A"/> (v) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="text" value="0"/> |

Hide SSID: Prevent SSID from being scanned.
Isolate LAN: Wireless clients (stations) with the same SSID cannot access wired PCs on LAN.
Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.

Available settings are explained as follows:

| Item | Description |
|----------------------------|--|
| Enable Wireless LAN | Check the box to enable wireless function. |
| Enable Client Limit | Check the box to set the maximum number of wireless stations which try to connect Internet through VigorAP. The number |
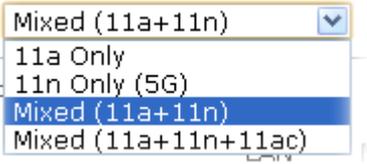
| | |
|---|---|
| | you can set is from 3 to 64. |
| Enable Client Limit per SSID | Define the maximum number of wireless stations per SSID which try to connect to Internet through Vigor device. The number you can set is from 3 to 64. |
| Mode | At present, VigorAP 902 can connect to 11a only, 11n only, Mixed (11a+11n) and Mixed (11a+11n+11ac).  |
| Channel | Means the channel of frequency of the wireless LAN. You may switch channel if the selected channel is under serious interference. If you have no idea of choosing the frequency, please select AutoSelect to let system determine for you. |
| Enable 2 Subnet (Simulate 2 APs) | Check the box to enable the function for two independent subnets. Once you enable this function, LAN-A and LAN-B would be independent. Next, you can connect one router in LAN-A, and another router in LAN-B. Such mechanism can make you feeling that you have two independent AP/subnet functions in one VigorAP 902. If you disable this function, LAN-A and LAN-B ports are in the same domain. You could only connect one router (no matter connecting to LAN-A or LAN-B) in this environment. |
| Hide SSID | Check it to prevent from wireless sniffing and make it harder for unauthorized clients or STAs to join your wireless LAN. Depending on the wireless utility, the user may only see the information except SSID or just cannot see any thing about VigorAP 902 while site surveying. The system allows you to set four sets of SSID for different usage. |
| SSID | Set a name for VigorAP 902 to be identified. When Enable 2 Subnet is enabled, you can specify subnet interface (LAN-A or LAN-B) for each SSID by using the drop down menu. |
| Subnet | Choose LAN-A or LAN-B for each SSID. If you choose LAN-A, the wireless clients connecting to this SSID could only communicate with LAN-A. |
| Isolate LAN | Check this box to make the wireless clients (stations) with the same SSID not accessing for wired PC in LAN. |
| Isolate Member | Check this box to make the wireless clients (stations) with the same SSID not accessing for each other. |
| VLAN ID | Type the value for such SSID. Packets transferred from such SSID to LAN will be tagged with the number. If your network uses VLANs, you can assign the SSID to a VLAN on your network. Client devices that associate using the SSID are grouped into this VLAN. The VLAN ID range is from 3 to 4095. The VLAN ID is 0 by default, it means |

| |
|---|
| disabling the VLAN function for the SSID. |
|---|

After finishing this web page configuration, please click **OK** to save the settings.

3.12.2 Security


This page allows you to set security with different modes for SSID 1, 2, 3 and 4 respectively. After configuring the correct settings, please click **OK** to save and invoke it.


By clicking the **Security Settings**, a new web page will appear so that you could configure the settings.

Wireless LAN (5GHz) >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|---|--------|--|----------------------------------|
| SSID | | MK-902-mamie | |
| Mode | | Mixed(WPA+WPA2)/PSK | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA | | | |
| WPA Algorithms | | <input type="radio"/> TKIP <input type="radio"/> AES <input checked="" type="radio"/> TKIP/AES | |
| Pass Phrase | | <input type="password" value="*****"/> | |
| Key Renewal Interval | | <input type="text" value="3600"/> seconds | |
| EAPOL Key Retry | | <input checked="" type="radio"/> Enable <input type="radio"/> Disable | |
| WEP | | | |
| <input checked="" type="radio"/> Key 1 : | | <input type="text"/> | <input type="text" value="Hex"/> |
| <input type="radio"/> Key 2 : | | <input type="text"/> | <input type="text" value="Hex"/> |
| <input type="radio"/> Key 3 : | | <input type="text"/> | <input type="text" value="Hex"/> |
| <input type="radio"/> Key 4 : | | <input type="text"/> | <input type="text" value="Hex"/> |
| 802.1x WEP | | <input type="radio"/> Disable <input checked="" type="radio"/> Enable | |

Available settings are explained as follows:
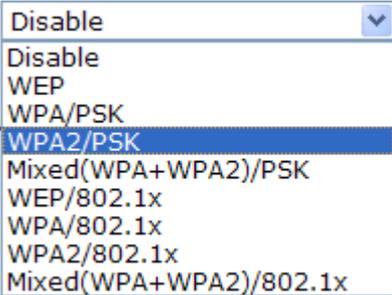
| Item | Description |
|-------------|---|
| Mode | <p>There are several modes provided for you to choose.</p>  <p>Disable - The encryption mechanism is turned off.</p> <p>WEP - Accepts only WEP clients and the encryption key should be entered in WEP Key.</p> <p>WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK - Accepts only WPA clients and the encryption key should be entered in PSK. The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WEP/802.1x - The built-in RADIUS client feature enables VigorAP 902 to assist the remote dial-in user or a wireless</p> |

| | |
|-----------------------------|---|
| | <p>station and the RADIUS server in performing mutual authentication. It enables centralized remote access authentication for network management.</p> <p>The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication. Select WPA, WPA2 or Auto as WPA mode.</p> <p>WPA/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> <p>WPA2/802.1x - The WPA encrypts each frame transmitted from the radio using the key, which either PSK (Pre-Shared Key) entered manually in this field below or automatically negotiated via 802.1x authentication.</p> |
| WPA Algorithms | Select TKIP, AES or TKIP/AES as the algorithm for WPA. Such feature is available for WPA2/802.1x, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Pass Phrase | Type 8~63 ASCII characters, such as 012345678..(or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde..."). Such feature is available for WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| Key Renewal Interval | WPA uses shared key for authentication to the network. However, normal network operations use a different encryption key that is randomly generated. This randomly generated key that is periodically replaced. Enter the renewal security time (seconds) in the column. Smaller interval leads to greater security but lower performance. Default is 3600 seconds. Set 0 to disable re-key. Such feature is available for WPA2/802.1, WPA/802.1x, WPA/PSK or WPA2/PSK or Mixed (WPA+WPA2)/PSK mode. |
| EAPOL Key Retry | EAPOL means Extensible Authentication Protocol over LAN. Click Enable to make sure that the key will be installed and used once in order to prevent key reinstallation attack. |
| Key 1 – Key 4 | <p>Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(~) except '#' and ','. Such feature is available for WEP mode.</p>  |
| 802.1x WEP | <p>Disable - Disable the WEP Encryption. Data sent to the AP will not be encrypted.</p> <p>Enable - Enable the WEP Encryption.</p> |

Such feature is available for **WEP/802.1x** mode.

Click the link of **RADIUS Server** to access into the following page for more settings.

Radius Server

| | |
|---|--|
| <input type="checkbox"/> Use internal RADIUS Server | |
| IP Address | <input type="text" value="0"/> |
| Port | <input type="text" value="1812"/> |
| Shared Secret | <input type="text" value="*****"/> |
| Session Timeout | <input type="text" value="0"/> second(s) |

Available settings are explained as follows:

| Item | Description |
|-----------------------------------|--|
| Use internal RADIUS Server | There is a RADIUS server built in VigorAP 902 which is used to authenticate the wireless client connecting to the access point. Check this box to use the internal RADIUS server for wireless security. Besides, if you want to use the external RADIUS server for authentication, do not check this box. Please refer to the section, 3.13 RADIUS Server to configure settings for internal server of VigorAP 902. |
| IP Address | Enter the IP address of external RADIUS server. |
| Port | The UDP port number that the external RADIUS server is using. The default value is 1812, based on RFC 2138. |
| Shared Secret | The external RADIUS server and client share a secret that is used to authenticate the messages sent between them. Both sides must be configured to use the same shared secret. |
| Session Timeout | Set the maximum time of service provided before re-authentication. Set to zero to perform another authentication immediately after the first authentication has successfully completed. (The unit is second.) |


After finishing this web page configuration, please click **OK** to save the settings.

3.12.3 Access Control

For additional security of wireless access, the **Access Control** facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. By clicking the **Access Control**, a new web page will appear, as depicted below, so that you could edit the clients' MAC addresses to control their access rights (deny or allow).

Wireless LAN (5GHz) >> Access Control

Available settings are explained as follows:
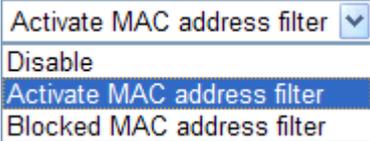
| Item | Description |
|-----------------------------|---|
| Policy | Select to enable any one of the following policy or disable the policy. Choose Activate MAC address filter to type in the MAC addresses for other clients in the network manually. Choose Blocked MAC address filter , so that all of the devices with the MAC addresses listed on the MAC Address Filter table will be blocked and cannot access into VigorAP 902.  |
| MAC Address Filter | Display all MAC addresses that are edited before. |
| Client's MAC Address | Manually enter the MAC address of wireless client. |
| Add | Add a new MAC address into the list. |
| Delete | Delete the selected MAC address in the list. |
| Edit | Edit the selected MAC address in the list. |
| Cancel | Give up the access control set up. |

| | |
|----------------|--|
| Backup | Click it to store the settings (MAC addresses on MAC Address Filter table) on this page as a file. |
| Restore | Click it to restore the settings (MAC addresses on MAC Address Filter table) from an existed file. |

After finishing this web page configuration, please click **OK** to save the settings.

3.12.4 WPS

Open **Wireless LAN>>WPS** to configure the corresponding settings.

Wireless LAN (5GHz) >> WPS (Wi-Fi Protected Setup)

Enable WPS 

Wi-Fi Protected Setup Information

| | |
|-------------------------|---------------------|
| WPS Configured | Yes |
| WPS SSID | DrayTek5G-LAN-A |
| WPS Auth Mode | Mixed(WPA+WPA2)/PSK |
| WPS Encrypt Type | TKIP/AES |

Device Configure

| | |
|-------------------------------------|---|
| Configure via Push Button | <input type="button" value="Start PBC"/> |
| Configure via Client PinCode | <input type="text"/> <input type="button" value="Start PIN"/> |

Status: Not used

Note: WPS can help your wireless client automatically connect to the Access point.

: WPS is Disabled.

: WPS is Enabled.

: Waiting for WPS requests from wireless clients.

Available settings are explained as follows:

| Item | Description |
|-------------------------------------|---|
| Enable WPS | Check this box to enable WPS setting. |
| WPS Configured | Display related system information for WPS. If the wireless security (encryption) function of VigorAP 902 is properly configured, you can see 'Yes' message here. |
| WPS SSID | Display current selected SSID. |
| WPS Auth Mode | Display current authentication mode of the VigorAP 902. Only WPA2/PSK and WPA/PSK support WPS. |
| WPS Encrypt Type | Display encryption mode (None, WEP, TKIP, AES, etc.) of VigorAP 902. |
| Configure via Push Button | Click Start PBC to invoke Push-Button style WPS setup procedure. VigorAP 902 will wait for WPS requests from wireless clients about two minutes. Both ACT and 5G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes) |
| Configure via Client PinCode | Type the PIN code specified in wireless client you wish to connect, and click Start PIN button. Both ACT and 5G WLAN LEDs on VigorAP 902 will blink quickly when WPS is in progress. It will return to normal condition after two minutes. (You need to setup WPS within two minutes). |


3.12.5 Advanced Setting

This page is to determine which algorithm will be selected for wireless transmission rate.

Wireless LAN (5GHz) >> Advanced Setting

| | |
|--------------------------------|--|
| Channel Width | <input type="radio"/> 20 MHz <input type="radio"/> Auto 20/40 MHz <input checked="" type="radio"/> Auto 20/40/80 MHz |
| Tx Power | <input checked="" type="radio"/> 100% <input type="radio"/> 80% <input type="radio"/> 60% <input type="radio"/> 30% <input type="radio"/> 20% <input type="radio"/> 10% |
| Rate Adaptation Algorithm | <input checked="" type="radio"/> New <input type="radio"/> Old |
| Fragment Length (256 - 2346) | <input type="text" value="2346"/> bytes |
| RTS Threshold (1 - 2347) | <input type="text" value="2347"/> bytes |
| Country Code | <input type="text"/> (Reference) |
| Auto Channel Filtered Out List | <input type="checkbox"/> 36 <input type="checkbox"/> 40 <input type="checkbox"/> 44 <input type="checkbox"/> 48 <input type="checkbox"/> 52 <input type="checkbox"/> 56 <input type="checkbox"/> 60 <input type="checkbox"/> 64 <input type="checkbox"/> 100 <input type="checkbox"/> 104 <input type="checkbox"/> 108 <input type="checkbox"/> 112 <input type="checkbox"/> 116 <input type="checkbox"/> 120 <input type="checkbox"/> 124 <input type="checkbox"/> 128 <input type="checkbox"/> 132 <input type="checkbox"/> 136 <input type="checkbox"/> 140 |
| Isolate 2.4GHz and 5GHz bands | <input checked="" type="radio"/> Enable <input type="radio"/> Disable |
| Isolate members with IP | <input type="radio"/> Enable <input checked="" type="radio"/> Disable |

Available settings are explained as follows:

| Item | Description |
|----------------------------------|---|
| Channel Width | <p>20 MHz- the AP will use 20MHz for data transmission and receiving between the AP and the stations.</p> <p>Auto 20/40 MHz-the AP will scan for nearby wireless AP, and then use 20MHz if the number of AP is more than 10, or use 40MHz if it's not.</p> <p>Auto 20/40/80 MHz- the AP will use 20MHz or 40MHz or 80MHz for data transmission and receiving according to the station capability. Such channel can increase the performance for data transmission.</p> |
| Tx Power | <p>The default setting is the maximum (100%). Lowering down the value may degrade range and throughput of wireless.</p>  |
| Rate Adaptation Algorithm | Wireless transmission rate is adapted dynamically. Usually, performance of “new” algorithm is better than “old”. |
| Fragment Length | Set the Fragment threshold of wireless radio. Do not modify default value if you don't know what it is, default value is 2346. |
| RTS Threshold | <p>Minimize the collision (unit is bytes) between hidden stations to improve wireless performance.</p> <p>Set the RTS threshold of wireless radio. Do not modify default value if you don't know what it is, default value is 2347.</p> |

| | |
|---------------------------------------|--|
| Country Code | VigorAP broadcasts country codes by following the 802.11d standard. However, some wireless stations will detect / scan the country code to prevent conflict occurred. If conflict is detected, wireless station will be warned and is unable to make network connection. Therefore, changing the country code to ensure successful network connection will be necessary for some clients. |
| Auto Channel Filtered Out List | The selected wireless channels will be discarded if AutoSelect is selected as Channel selection mode in Wireless LAN>>General Setup . |
| Isolate 2.4GHz and 5GHz bands | <p>The default setting is “Enable”. It means that the wireless client using 2.4GHz band is unable to connect to the wireless client with 5GHz band, and vice versa.</p> <p>For WLAN 2.4GHz and 5GHz set with the same SSID name:</p> <ul style="list-style-type: none"> ● No matter such function is enabled or disabled, clients using WLAN 2.4GHz and 5GHz can communicate for each other if Isolate Member (in Wireless LAN>>General Setup) is NOT enabled for such SSID. ● Yet, if the function of Isolate Member (in Wireless LAN>>General Setup) is enabled for such SSID, clients using WLAN 2.4GHz and 5GHz will be unable to communicate with each other. |
| Isolate members with IP | <p>The default setting is “Disable”.</p> <p>If it is enabled, VigorAP will isolate different wireless clients according to their IP address(es).</p> |

3.12.6 AP Discovery

VigorAP 902 can scan all regulatory channels and find working APs in the neighborhood. Based on the scanning result, users will know which channel is clean for usage. Also, it can be used to facilitate finding an AP for a WDS link. Notice that during the scanning process (about 5 seconds), no client is allowed to connect to Vigor.

This page is used to scan the existence of the APs on the wireless LAN. Yet, only the AP which is in the same channel of VigorAP 902 can be found. Please click **Scan** to discover all the connected APs.

Access Point List

Enable AP Monitor Mode

| Select | Index | SSID | BSSID | RSSI | Channel | Encryption | Authentication | Mode | Ch. Width | Last Detected |
|-----------------------|-------|---------------|-------------------|------|---------|------------|---------------------|----------|-----------|-----------------|
| <input type="radio"/> | 1 | Draytek5G | 00:1d:aa:7f:5d:5a | 23% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 20 | Jan 1, 22:26:28 |
| <input type="radio"/> | 2 | ssid5g3 | 02:1d:aa:7f:5d:5a | 24% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 20 | Jan 1, 22:26:28 |
| <input type="radio"/> | 3 | v2860 5g 1 | 00:1d:aa:86:ba:d2 | 5% | 36 | AES | WPA2/PSK | 11a/n/ac | 40 | Jan 1, 22:26:28 |
| <input type="radio"/> | 4 | Hotpost_5G... | 02:1d:aa:cb:a3:12 | 52% | 36 | NONE | | 11a/n | 40 | Jan 1, 22:26:28 |
| <input type="radio"/> | 5 | Draytek5G | 00:1d:aa:7f:5d:8e | 7% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 20 | Jan 1, 22:26:28 |
| <input type="radio"/> | 6 | v2860 5g 2 | 02:1d:aa:86:ba:d2 | 0% | 36 | AES | WPA2/PSK | 11a/n/ac | 40 | Jan 1, 22:16:31 |
| <input type="radio"/> | 7 | Hotspot_5G... | 00:1d:aa:cb:a3:12 | 83% | 36 | NONE | | 11a/n | 40 | Jan 1, 22:26:28 |
| <input type="radio"/> | 8 | PQC_5G | 00:1d:aa:3d:4f:15 | 10% | 40 | NONE | | 11a/n/ac | 80 | Jan 1, 22:26:28 |
| <input type="radio"/> | 9 | V2860-Smar... | 00:1d:aa:5d:ca:c2 | 44% | 48 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 80 | Jan 1, 22:26:28 |
| <input type="radio"/> | 10 | | 00:1d:aa:54:b1:3a | 13% | 48 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n | 40 | Jan 1, 22:20:30 |
| <input type="radio"/> | 11 | 910-MK-mam... | 00:1d:aa:7c:cf:a6 | 76% | 64 | NONE | | 11a/n/ac | 80 | Jan 1, 22:26:28 |
| <input type="radio"/> | 12 | 910-MK-mam... | 02:1d:aa:7c:cf:a6 | 76% | 64 | NONE | | 11a/n/ac | 80 | Jan 1, 22:26:28 |
| <input type="radio"/> | 13 | IEFP-Entra... | 00:1d:aa:d0:ee:b2 | 13% | 108 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 80 | Jan 1, 22:26:28 |
| <input type="radio"/> | 14 | RD8_5G_wir... | 00:1d:aa:5b:a0:ca | 7% | 36 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n/ac | 80 | Jan 1, 22:26:28 |
| <input type="radio"/> | 15 | FAE-Wendy-... | 02:1d:aa:f0:6d:f2 | 0% | 100 | AES | WPA2 | 11a/n/ac | 80 | Jan 1, 22:20:30 |
| <input type="radio"/> | 16 | FAE-Wendy-... | 00:1d:aa:f0:6d:f2 | 0% | 100 | AES | WPA2/PSK | 11a/n/ac | 80 | Jan 1, 22:26:28 |
| <input type="radio"/> | 17 | | 00:1d:aa:54:b3:d2 | 2% | 48 | TKIP/AES | Mixed(WPA+WPA2)/PSK | 11a/n | 40 | Jan 1, 21:40:30 |
| <input type="radio"/> | 18 | DrayTek_5G | 00:1d:aa:19:55:c2 | 7% | 48 | NONE | | 11a/n | 40 | Jan 1, 22:10:30 |

See [Channel Interference](#)**Note:** During the scanning process (about 5 seconds), no station is allowed to connect with the AP.

AP's MAC Address

 : : : : :

AP's SSID

Select as **Universal Repeater**:

Each item is explained as follows:

| Item | Description |
|-------------------------------|--|
| Enable AP Monitor Mode | This function can help to get and keep the records of APs detected by such device after clicking Scan. In general, only the available AP will be detected by Vigor device. Once the AP is unavailable, it will be deleted from the Access Point List immediately. However, if such function is enabled, the system will keep the record of the AP (once detected by Vigor device) until it is available for Vigor device again. |
| SSID | Display the SSID of the AP scanned by VigorAP 902. |
| BSSID | Display the MAC address of the AP scanned by VigorAP 902. |
| RSSI | Display the signal strength of the access point. RSSI is the abbreviation of Received Signal Strength Indication. |
| Channel | Display the wireless channel used for the AP that is scanned by VigorAP 902. |
| Encryption | Display the encryption mode for the scanned AP. |
| Authentication | Display the authentication type that the scanned AP applied. |
| Mode | Display the wireless connection mode that the scanned AP used. |
| Ch. Width | Display the channel width that the scanned AP used. |
| Scan | It is used to discover all the connected AP. The results will be shown on the box above this button |
| Channel Interference | Access into Diagnostics>>Interference Monitor for viewing interference status for channel(s). |
| AP's MAC Address | If you want the found AP applying the WDS settings, please type in the AP's MAC address. |
| AP's SSID | To specify an AP to be applied with WDS settings, you can |

| | |
|-------------------------------------|---|
| | specify MAC address or SSID for the AP. Here is the place that you can type the SSID of the AP. |
| Select as Universal Repeater | In Universal Repeater mode, WAN would work as station mode and the wireless AP can be selected as a universal repeater. Choose one of the wireless APs from the Scan list. |

3.12.7 Universal Repeater

The access point can act as a wireless repeater; it can be Station and AP at the same time. It can use Station function to connect to a Root AP and use AP function to serve all wireless stations within its coverage.

Note: While using **Universal Repeater** mode, the access point will demodulate the received signal. Please check if this signal is noise for the operating network, then have the signal modulated and amplified again. The output power of this mode is the same as that of WDS and normal AP mode.

Wireless LAN (5GHz) >> Universal Repeater

Universal Repeater Parameters


| | |
|-------------------------------|----------------------------|
| SSID | <input type="text"/> |
| MAC Address (Optional) | <input type="text"/> |
| Channel | 5180MHz (Channel 36) ▼ |
| Security Mode | Open ▼ |
| Encryption Type | None ▼ |
| WEP Keys | |
| <input type="radio"/> Key 1 : | <input type="text"/> Hex ▼ |
| <input type="radio"/> Key 2 : | <input type="text"/> Hex ▼ |
| <input type="radio"/> Key 3 : | <input type="text"/> Hex ▼ |
| <input type="radio"/> Key 4 : | <input type="text"/> Hex ▼ |




Note: If Channel is modified, the Channel setting of AP would also be changed.

Universal Repeater IP Configuration

| | |
|-----------------|--------|
| Connection Type | DHCP ▼ |
| Router Name | AP902 |

Available settings are explained as follows:

| Item | Description |
|-------------------------------|--|
| SSID | Set the name of access point that VigorAP 902 wants to connect to. |
| MAC Address (Optional) | Type the MAC address of access point that VigorAP 902 wants to connect to. |
| Channel | Means the channel of frequency of the wireless LAN. The default channel is 36. You may switch channel if the selected channel is under serious interference. If you have no idea of choosing the frequency, please select AutoSelect to let system determine for you. |
| Security Mode | <p>There are several modes provided for you to choose. Each mode will bring up different parameters (e.g., WEP keys, Pass Phrase) for you to configure.</p>  |

| | |
|--|---|
| <p>Encryption Type for Open/Shared</p> | <p>This option is available when Open/Shared is selected as Security Mode.</p> <p>Choose None to disable the WEP Encryption. Data sent to the AP will not be encrypted. To enable WEP encryption for data transmission, please choose WEP.</p>  <p>WEP Keys - Four keys can be entered here, but only one key can be selected at a time. The format of WEP Key is restricted to 5 ASCII characters or 10 hexadecimal values in 64-bit encryption level, or restricted to 13 ASCII characters or 26 hexadecimal values in 128-bit encryption level. The allowed content is the ASCII characters from 33(!) to 126(~) except '#' and ','.</p>  |
| <p>Encryption Type for WPA/PSK and WPA2/PSK</p> | <p>This option is available when WPA/PSK or WPA2/PSK is selected as Security Mode.</p> <p>Select TKIP or AES as the algorithm for WPA.</p>  |
| <p>Pass Phrase</p> | <p>Type 8~63 ASCII characters, such as 012345678 (or 64 Hexadecimal digits leading by 0x, such as "0x321253abcde...").</p> |
| <p>Connection Type</p> | <p>Choose DHCP or Static IP as the connection mode.</p> <p>DHCP – The wireless station will be assigned with an IP from.</p> <p>Static IP – The wireless station shall specify a static IP for connecting to Internet via VigorAP.</p>  |
| <p>Router Name</p> | <p>This setting is available when DHCP is selected as Connection Type.</p> <p>Type a name for the VigorAP as identification. Simply use the default name.</p> |
| <p>IP Address</p> | <p>This setting is available when Static IP is selected as Connection Type.</p> <p>Type an IP address with the same network segment of the LAN IP setting of VigorAP. Such IP shall be different with any IP address in LAN.</p> |

| | |
|------------------------|---|
| Subnet Mask | This setting is available when Static IP is selected as Connection Type . Type the subnet mask setting which shall be the same as the one configured in LAN for VigorAP. |
| Default Gateway | This setting is available when Static IP is selected as Connection Type . Type the gateway setting which shall be the same as the default gateway configured in LAN for VigorAP. |

After finishing this web page configuration, please click **OK** to save the settings.

3.12.8 WMM Configuration

WMM is an abbreviation of Wi-Fi Multimedia. It defines the priority levels for four access categories derived from 802.1d (prioritization tabs). The categories are designed with specific types of traffic, voice, video, best effort and low priority data. There are four accessing categories - AC_BE , AC_BK, AC_VI and AC_VO for WMM.

Wireless LAN (5GHz) >> WMM Configuration

WMM Configuration [Set to Factory Default](#)

WMM Capable Enable Disable
 APSD Capable Enable Disable

WMM Parameters of Access Point

| | Aifsn | CWMin | CWMax | Txop | ACM | AckPolicy |
|-------|--------------------------------|-----------------------------------|------------------------------------|---------------------------------|--------------------------|--------------------------|
| AC_BE | <input type="text" value="3"/> | <input type="text" value="15"/> ▾ | <input type="text" value="63"/> ▾ | <input type="text" value="0"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_BK | <input type="text" value="7"/> | <input type="text" value="15"/> ▾ | <input type="text" value="102"/> ▾ | <input type="text" value="0"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_VI | <input type="text" value="1"/> | <input type="text" value="7"/> ▾ | <input type="text" value="15"/> ▾ | <input type="text" value="94"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| AC_VO | <input type="text" value="1"/> | <input type="text" value="3"/> ▾ | <input type="text" value="7"/> ▾ | <input type="text" value="47"/> | <input type="checkbox"/> | <input type="checkbox"/> |

WMM Parameters of Station

| | Aifsn | CWMin | CWMax | Txop | ACM |
|-------|--------------------------------|-----------------------------------|------------------------------------|---------------------------------|--------------------------|
| AC_BE | <input type="text" value="3"/> | <input type="text" value="15"/> ▾ | <input type="text" value="102"/> ▾ | <input type="text" value="0"/> | <input type="checkbox"/> |
| AC_BK | <input type="text" value="7"/> | <input type="text" value="15"/> ▾ | <input type="text" value="102"/> ▾ | <input type="text" value="0"/> | <input type="checkbox"/> |
| AC_VI | <input type="text" value="2"/> | <input type="text" value="7"/> ▾ | <input type="text" value="15"/> ▾ | <input type="text" value="94"/> | <input type="checkbox"/> |
| AC_VO | <input type="text" value="2"/> | <input type="text" value="3"/> ▾ | <input type="text" value="7"/> ▾ | <input type="text" value="47"/> | <input type="checkbox"/> |

Available settings are explained as follows:

| Item | Description |
|---------------------|---|
| WMM Capable | To apply WMM parameters for wireless data transmission, please click the Enable radio button. |
| APSD Capable | APSD (automatic power-save delivery) is an enhancement over the power-save mechanisms supported by Wi-Fi networks. It allows devices to take more time in sleeping state and consume less power to improve the performance by minimizing transmission latency. The default setting is Disable . |
| Aifsn | It controls how long the client waits for each data transmission. Please specify the value ranging from 1 to 15. Such parameter will influence the time delay for WMM accessing categories. For the service of voice or video image, please set small value for AC_VI and AC_VO categories For the service of e-mail or |

| | |
|--------------------|---|
| | web browsing, please set large value for AC_BE and AC_BK categories. |
| CWMin/CWMax | CWMin means contention Window-Min and CWMax means contention Window-Max. Please specify the value ranging from 1 to 15. Be aware that CWMax value must be greater than CWMin or equals to CWMin value. Both values will influence the time delay for WMM accessing categories. The difference between AC_VI and AC_VO categories must be smaller; however, the difference between AC_BE and AC_BK categories must be greater. |
| Txop | It means transmission opportunity. For WMM categories of AC_VI and AC_VO that need higher priorities in data transmission, please set greater value for them to get highest transmission opportunity. Specify the value ranging from 0 to 65535. |
| ACM | It is an abbreviation of Admission control Mandatory. It can restrict stations from using specific category class if it is checked. Note: VigorAP 902 provides standard WMM configuration in the web page. If you want to modify the parameters, please refer to the Wi-Fi WMM standard specification. |
| AckPolicy | “Uncheck” (default value) the box means the AP will answer the response request while transmitting WMM packets through wireless connection. It can assure that the peer must receive the WMM packets. “Check” the box means the AP will not answer any response request for the transmitting packets. It will have better performance with lower reliability. |

After finishing this web page configuration, please click **OK** to save the settings.

3.12.9 Bandwidth Management

The downstream or upstream from FTP, HTTP or some P2P applications will occupy large of bandwidth and affect the applications for other programs. Please use Bandwidth Management to make the bandwidth usage more efficient.

Wireless LAN (5GHz) >> Bandwidth Management

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|------------------------------------|--------------|--------------------------|------------------------|
| SSID | | DrayTek5G-LAN-A | |
| Per Station Bandwidth Limit | | | |
| Enable | | <input type="checkbox"/> | |
| Upload Limit | User defined | K | bps (Default unit : K) |
| Download Limit | User defined | K | bps (Default unit : K) |
| Auto Adjustment | | <input type="checkbox"/> | |

Note:
 1. Download : Traffic going to any station. Upload : Traffic being sent from a wireless station.
 2. Allow auto adjustment could make the best utilization of available bandwidth.

OK Cancel

Available settings are explained as follows:

| Item | Description |
|-----------------------------|---|
| SSID | Display the specific SSID name. |
| Enable | Check this box to enable the bandwidth management for clients. |
| Upload Limit | Define the maximum speed of the data uploading which will be used for the wireless stations connecting to VigorAP with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Download Limit | Define the maximum speed of the data downloading which will be used for the wireless station connecting to VigorAP with the same SSID. Use the drop down list to choose the rate. If you choose User defined , you have to specify the rate manually. |
| Auto Adjustment | Check this box to have the bandwidth limit determined by the system automatically. |
| Total Upload Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data uploading. |
| Total Download Limit | When Auto Adjustment is checked, the value defined here will be treated as the total bandwidth shared by all of the wireless stations with the same SSID for data downloading. |

After finishing this web page configuration, please click **OK** to save the settings.

3.12.10 Airtime Fairness

Airtime fairness is essential in wireless networks that must support critical enterprise applications.

Most of the applications are either symmetric or require more downlink than uplink capacity; telephony and email send the same amount of data in each direction, while video streaming and web surfing involve more traffic sent from access points to clients than the other way around. This is essential for ensuring predictable performance and quality-of-service, as well as allowing 802.11n and legacy clients to coexist on the same network. Without airtime fairness, offices using mixed mode networks risk having legacy clients slow down the entire network or letting the fastest client(s) crowd out other users.


With airtime fairness, every client at a given quality-of-service level has equal access to the network's airtime.

The wireless channel can be accessed by only one wireless station at the same time.

The principle behind the IEEE802.11 channel access mechanisms is that each station has **equal probability** to access the channel. When wireless stations have similar data rate, this principle leads to a fair result. In this case, stations get similar channel access time which is called airtime.

However, when stations have various data rate (e.g., 11g, 11n), the result is not fair. The slow stations (11g) work in their slow data rate and occupy too much airtime, whereas the fast stations (11n) become much slower.

Take the following figure as an example, both Station A(11g) and Station B(11n) transmit data packets through VigorAP 902. Although they have equal probability to access the channel, Station B(11n) gets only a little airtime and waits too much because Station A(11g) spends longer time to send one packet. In other words, Station B(fast rate) is obstructed by Station A(slow rate).

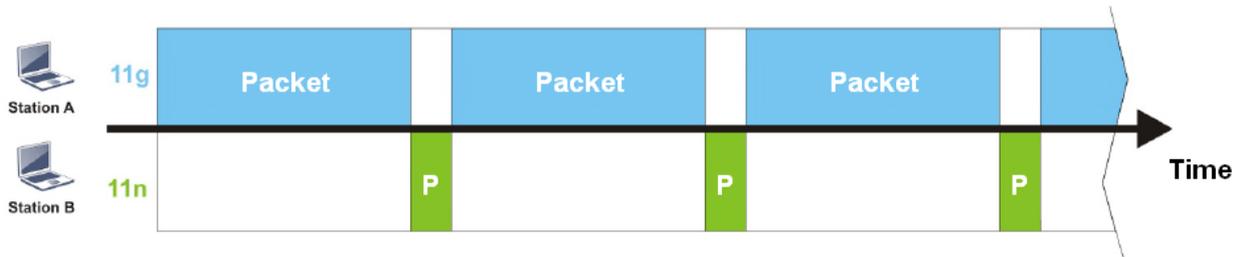

To improve this problem, Airtime Fairness is added for VigorAP 902. Airtime Fairness function tries to assign *similar airtime* to each station (A/B) by controlling TX traffic. In the following figure, Station B(11n) has higher probability to send data packets than Station A(11g). By this way, Station B(fast rate) gets fair airtime and it's speed is not limited by Station A(slow rate).



It is similar to automatic Bandwidth Limit. The dynamic bandwidth limit of each station depends on instant active station number and airtime assignment. Please note that Airtime Fairness of 2.4GHz and 5GHz are independent. But stations of different SSIDs function together, because they all use the same wireless channel. IN SPECIFIC ENVIRONMENTS, this function can reduce the bad influence of slow wireless devices and improve the overall wireless performance.

Suitable environment:


- (1) Many wireless stations.
- (2) All stations mainly use download traffic.
- (3) The performance bottleneck is wireless connection.

Wireless LAN (5GHz) >> Airtime Fairness

Enable **Airtime Fairness**
 Triggering Client Number (2 ~ 64, Default: 2)

Note: Please enable or disable this function according to the real situation and user experience. It is NOT suitable for all environments. You could check [Diagnostics >> Station Airtime](#) Graph first.

Available settings are explained as follows:
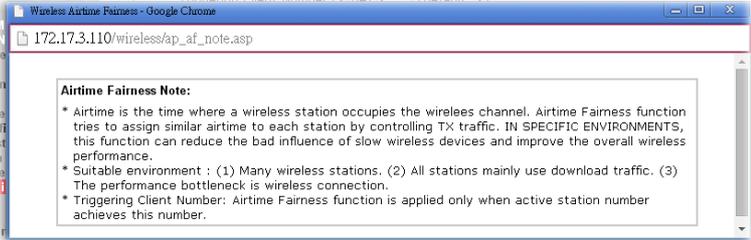
| Item | Description |
|--------------------------------|--|
| Enable Airtime Fairness | <p>Try to assign similar airtime to each wireless station by controlling TX traffic.</p> <p>Airtime Fairness – Click the link to display the following screen of airtime fairness note.</p>  <p>Triggering Client Number –Airtime Fairness function is applied only when active station number achieves this number.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.12.11 Station Control

Station Control is used to specify the duration for the wireless client to connect and reconnect VigorAP. If such function is not enabled, the wireless client can connect VigorAP until it shuts down.

Such feature is especially useful for free Wi-Fi service. For example, a coffee shop offers free Wi-Fi service for its guests for one hour every day. Then, the connection time can be set as “1 hour” and reconnection time can be set as “1 day”. Thus, the guest can finish his job within one hour and will not occupy the wireless network for a long time.


Note: Up to 300 Wireless Station records are supported by VigorAP.

Wireless LAN (5GHz) >> Station Control

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------------------------|--------|
| SSID | | DrayTek5G-LAN-A | |
| Enable | | <input type="checkbox"/> | |
| Connection Time | | 1 hour | |
| Reconnection Time | | 1 day | |
| Display All Station Control List | | | |

Note: Once the feature is enabled, the connection time quota will apply to each wireless client (identified by MAC address).

Available settings are explained as follows:
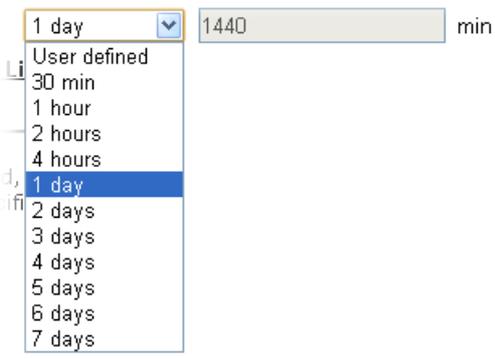
| Item | Description |
|--|--|
| SSID | Display the SSID that the wireless station will use it to connect with Vigor router. |
| Enable | Check the box to enable the station control function. |
| Connection Time / Reconnection Time | Use the drop down list to choose the duration for the wireless client connecting /reconnecting to Vigor router. Or, type the duration manually when you choose User defined .  |
| Display All Station Control List | All the wireless stations connecting to Vigor router by using such SSID will be listed on Station Control List. |

After finishing all the settings here, please click **OK** to save the configuration.

3.12.12 Roaming

The network signal for a single wireless access point might be limited by its coverage range. Therefore, if you want to expand the wireless network in a large exhibition with a quick method, you can install multiple access points with enabling the Roaming feature for each AP to reach the purpose of expanding wireless signals seamlessly.

These access points connecting for each other shall be verified by pre-authentication. This page allows you to enable the roaming feature and the pre-authentication.

Wireless LAN (5GHz) >> Roaming

AP-assisted Client Roaming Parameters

| | |
|---|------------------------------|
| <input type="checkbox"/> Minimum Basic Rate | 6 Mbps |
| <input checked="" type="radio"/> Disable RSSI Requirement | |
| <input checked="" type="radio"/> Strictly Minimum RSSI | -73 dBm (42%) (Default: -73) |
| <input type="radio"/> Minimum RSSI | -66 dBm (60%) (Default: -66) |
| with Adjacent AP RSSI over | 5 dB (Default: 5) |

Fast Roaming(WPA2/802.1x)

| | |
|-----------------------------------|------------------------------------|
| <input type="checkbox"/> Enable | |
| PMK Caching : Cache Period | 10 minutes (10 ~ 600, Default: 10) |
| Pre-Authentication | |

OK Cancel

Available settings are explained as follows:

| Item | Description |
|--|---|
| AP-assisted Client Roaming Parameters | <p>When the link rate of wireless station is too low or the signal received by the wireless station is too worse, VigorAP 902 will automatically detect (based on the link rate and RSSI requirement) and cut off the network connection for that wireless station to assist it to connect another Wireless AP to get better signal.</p> <p>Minimum Basic Rate – Check the box to use the drop down list to specify a basic rate (Mbps). When the link rate of the wireless station is below such value, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Disable RSSI Requirement - If it is selected, VigorAP will not terminate the network connection based on RSSI.</p> <p>Strictly Minimum RSSI - VigorAP uses RSSI (received signal strength indicator) to decide to terminate the network connection of wireless station. When the signal strength is below the value (dBm) set here, VigorAP 902 will terminate the network connection for that wireless station.</p> <p>Minimum RSSI - When the signal strength of the wireless station is below the value (dBm) set here and adjacent AP (must be DrayTek AP and support such feature too) with higher signal strength value (defined in the field of With Adjacent AP RSSI over) is detected by VigorAP 902, VigorAP 902 will terminate the network connection for that wireless station. Later, the wireless station can connect to the adjacent AP (with better</p> |

| | |
|--|---|
| | <p>RSSI).</p> <ul style="list-style-type: none"> ● With Adjacent AP RSSI over – Specify a value as a threshold. |
| <p>Fast Roaming (WPA2/802.1x)</p> | <p>Enable – Check the box to enable fast roaming configuration.</p> <p>PMK Cache Period - Set the expire time of WPA2 PMK (Pairwise master key) cache. PMK Cache manages the list from the BSSIDs in the associated SSID with which it has pre-authenticated. Such feature is available for WPA2/802.1 mode.</p> <p>Pre-Authentication - Enables a station to authenticate to multiple APs for roaming securer and faster. With the pre-authentication procedure defined in IEEE 802.11i specification, the pre-four-way-handshake can reduce handoff delay perceivable by a mobile node. It makes roaming faster and more secure. (Only valid in WPA2)</p> <p>Enable - Enable IEEE 802.1X Pre-Authentication.</p> <p>Disable - Disable IEEE 802.1X Pre-Authentication.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.12.13 Station List

Station List provides the knowledge of connecting wireless clients now along with its status code. Each tab (general, advanced, control, neighbor) will display different status information (including MAC address, Vendor, SSID, Auth, Encrypt, Tx/Rx Rate, Hostname, RSSI, Link Speed, BW, PSM, WMM, PHMd, MCS, Connection Time, Reconnection Time, Approx. Distance, Visit Time, and so on).

General

Display general information (e.g., MAC Address, SSID, Auth, Encrypt, TX/RX Rate) for the station.

Wireless LAN (5GHz) >> Station List

Station List

| | | | General | Advanced | Control | Neighbor | | |
|--|-------------|----------|---------|----------|---------|----------|----------------|----------------|
| Index | MAC Address | Hostname | Vendor | SSID | Auth | Encrypt | Tx Rate (Kbps) | Rx Rate (Kbps) |
| <div style="border: 1px solid #ccc; width: 100%; height: 100%;"></div> | | | | | | | | |
| <input type="button" value="Refresh"/> | | | | | | | | |

Add to Access Control:

Client's MAC Address : : : : : :

Available settings are explained as follows:

| Item | Description |
|------------------------------|---|
| MAC Address | Display the MAC Address for the connecting client. |
| Hostname | Display the host name of the connecting client. |
| SSID | Display the SSID that the wireless client connects to. |
| Auth | Display the authentication that the wireless client uses for connection with such AP. |
| Encrypt | Display the encryption mode used by the wireless client. |
| Tx Rate/Rx Rate | Display the transmission /receiving rate for packets. |
| Refresh | Click this button to refresh the status of station list. |
| Add to Access Control | Client's MAC Address - For additional security of wireless access, the Access Control facility allows you to restrict the network access right by controlling the wireless LAN MAC address of client. Only the valid MAC address that has been configured can access the wireless LAN interface. |
| Add | Click this button to add current typed MAC address into Access Control . |

Advanced

Display more information (e.g., AID, PSM, WMM, RSSI PhMd, BW, MCS, Rate) for the station.

Control

Display connection and reconnection time of the wireless stations.

Neighbor

Display more information for the neighboring wireless stations.

3.13 RADIUS Setting

3.13.1 RADIUS Server

VigorAP 902 offers a built-in RADIUS server to authenticate the wireless client that tries to connect to VigorAP 902. The AP can accept the wireless connection authentication requested by wireless clients.

RADIUS Setting >> RADIUS Server Configuration

Enable RADIUS Server

Authentication Type

Radius EAP Type PEAP ▼

Users Profile (up to 96 users)

| Username | Password | Confirm Password | Configure |
|--|--------------------------|--------------------------|--|
| <input type="text"/> | <input type="password"/> | <input type="password"/> | <input type="button" value="Add"/> <input type="button" value="Cancel"/> |
| NO. | Username | | Select |
| <input type="button" value="Delete Selected"/> <input type="button" value="Delete All"/> | | | |

Authentication Client (up to 16 clients)

| Client IP | Secret Key | Confirm Secret Key | Configure |
|--|--------------------------|--------------------------|--|
| <input type="text"/> | <input type="password"/> | <input type="password"/> | <input type="button" value="Add"/> <input type="button" value="Cancel"/> |
| NO. | Client IP | | Select |
| <input type="button" value="Delete Selected"/> <input type="button" value="Delete All"/> | | | |

Backup Radius Cfg : Upload From File: 未選擇檔案

Available settings are explained as follows:

| Item | Description |
|-----------------------------|---|
| Enable RADIUS Server | Check it to enable the internal RADIUS server. |
| Authentication Type | Let the user to choose the authentication method for RADIUS server. Radius EAP Type – There are two types, PEAP and EAP TLS, offered for selection. If EAP TLS is selected, a certificate must be installed or must be ensured to be trusted. |
| Users Profile | Username – Type a new name for the user profile. Password – Type a new password for such new user profile. Confirm Password – Retype the password to confirm it. Configure <ul style="list-style-type: none"> ● Add – Make a new user profile with the name and password specified on the left boxes. ● Cancel – Clear current settings for user profile. Delete Selected – Delete the selected user profile (s). |

| | |
|------------------------------|---|
| | Delete All – Delete all of the user profiles. |
| Authentication Client | <p>This internal RADIUS server of VigorAP 902 can be treated as the external RADIUS server for other users. Specify the client IP and secret key to make the wireless client choosing VigorAP 902 as its external RADIUS server.</p> <p>Client IP – Type the IP address for the user to be authenticated by VigorAP 902 when the user tries to use VigorAP 902 as the external RADIUS server.</p> <p>Secret Key – Type the password for the user to be authenticated by VigorAP 902 while the user tries to use VigorAP 902 as the external RADIUS server.</p> <p>Confirm Secret Key – Type the password again for confirmation.</p> <p>Configure</p> <ul style="list-style-type: none"> ● Add – Make a new client with IP and secret key specified on the left boxes. ● Cancel – Clear current settings for the client. <p>Delete Selected – Delete the selected client(s).</p> <p>Delete All – Delete all of the clients.</p> |
| Backup | Click it to store the settings (RADIUS configuration) on this page as a file. |
| Restore | Click it to restore the settings (RADIUS configuration) from an existed file. |

After finishing this web page configuration, please click **OK** to save the settings.

3.13.2 Certificate Management

When the local client and remote server are required to make certificate authentication (e.g., Radius EAP-TLS authentication) for wireless connection and avoiding the attack of MITM, a trusted root certificate authority (Root CA) will be used to authenticate the digital certificates offered by both ends.

However, the procedure of applying digital certificate from a trusted root certificate authority is complicated and time-consuming. Therefore, Vigor AP offers a mechanism which allows you to generate root CA to save time and provide convenience for general user. Later, such root CA generated by DrayTek server can perform the issuing of local certificate.

Root CA can be deleted but not edited. If you want to modify the settings for a Root CA, please delete the one and create another one by clicking Create Root CA.

RADIUS Setting >> X509 Trusted CA Certificate Configuration

| Name | Subject | Status | Modify |
|---------|---------|--------|----------------|
| Root CA | --- | --- | Create Root CA |

Note: 1. Please setup the "System Maintenance >> **Time and Date**" correctly before you try to generate a RootCA.
2. The Time Zone MUST be setup correctly.

Click Create Root CA to open the following page. Type or choose all the information that the window request such as subject name, key type, key size and so on.

RADIUS Setting >> Create Root CA

| Certificate Name | Root CA |
|---------------------------|--------------------------|
| Subject Name | |
| Country (C) | <input type="text"/> |
| State (S) | <input type="text"/> |
| Location (L) | <input type="text"/> |
| Organization (O) | <input type="text"/> |
| Organization Unit (OU) | <input type="text"/> |
| Common Name (CN) | <input type="text"/> |
| Email (E) | <input type="text"/> |
| Key Type | RSA ▼ |
| Key Size | 1024 Bit ▼ |
| Apply to Web HTTPS | <input type="checkbox"/> |

Available settings are explained as follows:

| Item | Description |
|---------------------------|---|
| Subject Name | <p>Type the required information for creating a root CA.</p> <p>Country (C) – Type the country code (two characters) in this box.</p> <p>State (S)/ Location (L)/ Organization (O)/ Organization Unit (OU) /Common Name (CN) - Type the name or information for the root CA with length less than 32 characters.</p> <p>Email (E) – Type the email address for the root CA with length less than 32 characters.</p> |
| Key Type | At present, only RSA (an encryption algorithm) is supported by such device. |
| Key Size | To determine the size of a key to be authenticated, use the drop down list to specify the one you need. |
| Apply to Web HTTPS | <p>VigorAP needs a certificate to access into Internet via Web HTTPS.</p> <p>Check this box to use the user-defined root CA certificate which will substitute for the original certificate applied by web HTTPS.</p> |

Note: “Common Name” must be configured with rotuer’s WAN IP or domain name.

After finishing this web page configuration, please click **OK** to save the settings. A new root CA will be generated.

3.14 Applications

Below shows the menu items for Applications.



3.14.1 Schedule

The VigorAP has a built-in clock which can update itself manually or automatically by means of Network Time Protocols (NTP). As a result, you can not only schedule the AP to dialup to the Internet at a specified time, but also restrict Internet access to certain hours so that users can connect to the Internet only during certain hours, say, business hours. The schedule is also applicable to other functions.

You have to set your time before set schedule. In **System Maintenance**>> **Time and Date** menu, press **Inquire Time** button to set the VigorAP's clock to current time of your PC. The clock will reset once if you power down or reset the AP. There is another way to set up time. You can inquiry an NTP server (a time server) on the Internet to synchronize the AP's clock. This method can only be applied when the WAN connection has been built up.

Applications >> Schedule

Schedule

Enable Schedule

OK

Schedule Configuration

| Index. | Setting | Action | Status |
|----------------------------|-------------------------|-------------|--------|
| 1 <input type="checkbox"/> | 2016 Jan. 1, 08:00 Once | Auto Reboot | V |

Add

Delete

Available settings are explained as follows:

| Item | Description |
|-------------------------------|---|
| Schedule | Enable Schedule - Check it to enable the function of schedule configuration. |
| Schedule Configuration | <p>Index – Display the sort number of the schedule profile.</p> <p>Setting – Display the summary of the schedule profile.</p> <p>Action – Display the action adopted by the schedule profile.</p> <p>Status – Display if the profile is enabled (V) or not (X).</p> <p>Add – Such button is available when Enable Schedule is checked. It allows to add a new schedule profile.</p> <p>Delete – Check the index box of the schedule profile and click such button to remove the profile.</p> |

You can set up to **15** schedules. To add a schedule:

1. Check the box of **Enable Schedule**.

- Click the **Add** button to open the following web page.

Applications >> Schedule

Add Schedule

Enable

Start Date: 2000 - 1 - 1 (Year - Month - Day)

Start Time: 0 : 0 (Hour : Minute)

Duration Time: 0 : 0 (Hour : Minute)

End Time: 0 : 0 (Hour : Minute)

Action: Auto Reboot

WiFi(2.4GHz): Radio SSID2 SSID3 SSID4


WiFi(5GHz): Radio SSID2 SSID3 SSID4

Acts: Once

Weekday: Monday Tuesday Wednesday Thursday Friday Saturday Sunday

Note: If we set WiFi schedule "Start Time" and "End Time" at exact same time, AP will execute the schedule without an end time.

Available settings are explained as follows:
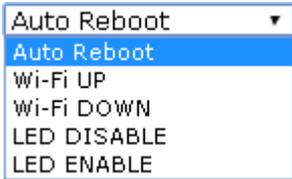
| Item | Description |
|-------------------------------------|--|
| Enable | Check to enable such schedule profile. |
| Start Date | Specify the starting date of the schedule. |
| Start Time | Specify the starting time of the schedule. |
| Duration Time | Specify the duration (or period) for the schedule. |
| End Time | Specify the ending time of the schedule. |
| Action | Specify which action should apply the schedule.  |
| WiFi(2.4GHz)/ WiFi(5GHz) | When Wi-Fi UP or Wi-Fi DOWN is selected as Action , you can check the Radio or SSID 2~4 boxes (2.4GHz and 5GHz respectively) to setup the network based on the schedule profile. Note: When Radio is selected, SSID2, SSID3 and SSID4 are not available for choosing, vice versa. |
| Acts | Specify how often the schedule will be applied. Once -The schedule will be applied just once Routine -Specify which days in one week should perform the schedule.  |
| Weekday | Choose and check the day to perform the schedule. It is available when Routine is selected as Acts . |

- After finishing this web page configuration, please click **OK** to save the settings. A new schedule profile has been created and displayed on the screen.

Applications >> Schedule

Schedule

Enable Schedule

OK

Schedule Configuration

| Index. | Setting | Action | Status |
|----------------------------|-------------------------|-------------|--------|
| 1 <input type="checkbox"/> | 2000 Jan. 1, 00:00 Once | Auto Reboot | V |

Add

Delete

3.14.2 Apple iOS Keep Alive

To keep the wireless connection (via Wi-Fi) on iOS device in alive, VigorAP 902 will send the UDP packets with 5353 port to the specific IP every five seconds.

Applications >> Apple iOS Keep Alive

Enable Apple iOS Keep Alive

Apple iOS Keep Alive:
Apple iOS Keep Alive can keep Wifi connection of iOS device by sending UDP port 5353 packets every 5 seconds.

| Index | Apple iOS Keep Alive IP Address | Index | Apple iOS Keep Alive IP Address |
|-------|---------------------------------|-------|---------------------------------|
| 1 | | 2 | |
| 3 | | 4 | |
| 5 | | 6 | |

OK

Cancel

Available settings are explained as follows:

| Item | Description |
|--|---|
| Enable Apple iOS Keep Alive | Check to enable the function. |
| Index | Display the setting link. Click the index link to open the configuration page for setting the IP address. |
| Apple iOS Keep Alive IP Address | Display the IP address. |

3.14.3 Wi-Fi Auto On/Off

When VigorAP is able or unable to ping the specified host, the Wi-Fi function will be turned on or off automatically. The purpose of such function is to avoid wireless station roaming to an AP which is unable to access Internet.

Applications >> Wi-Fi Auto On/Off

Wi-Fi Auto On/Off

Enable Auto Switch On/Off Wi-Fi

Ping Host

Auto Switch On/Off Wi-Fi:
Turn on/off the Wi-Fi automatically when the AP is able/unable to ping the host.

Available settings are explained as follows:

| Item | Description |
|--|--|
| Enable Auto Switch On/Off Wi-Fi | Check the box to enable such function. |
| Ping Host | Type an IP address (e.g., 8.8.8.8) or a domain name (e.g., google.com) for testing if the access point is stable or not. |

3.14.4 Temperature Sensor

A USB Thermometer is now available that complements your installed DrayTek AP installations that will help you monitor the server or data communications room environment and notify you if the server room or data communications room is overheating.



During summer in particular, it is important to ensure that your server or data communications equipment are not overheating due to cooling system failures.

The inclusion of a USB thermometer in compatible VigorAP will continuously monitor the temperature of its environment. When a pre-determined threshold is reached you will be alerted via Syslog.

Temperature Sensor Settings

Applications >> Temperature Sensor Setting

Temperature Sensor Graph
Temperature Sensor Settings

Display Settings

Temperature Calibration Offset °C (-10C ~ +10C)

Temperature Unit Celsius Fahrenheit

Alarm Settings

Enable Syslog Alarm Mail Alert

Temperature High Alarm °C

Temperature Low Alarm °C


Available settings are explained as follows:

| Item | Description |
|-------------------------|--|
| Display Settings | <p>Temperature Calibration Offset- Type a value used for correcting the temperature error.</p> <p>Temperature Unit - Choose the display unit of the temperature. There are two types for you to choose.</p> |
| Alarm Settings | <p>Enable Syslog Alarm - The temperature log containing the alarm message will be recorded on Syslog if it is enabled.</p> <p>Mail Alert - The temperature log containing the alarm message will be sent by mail.</p> <p>Temperature High Alarm/ Temperature Low Alarm - Type the upper limit and lower limit for the system to send out temperature alert.</p> |

Temperature Sensor Graph

Below shows an example of temperature graph:

Applications >> Temperature Sensor Graph

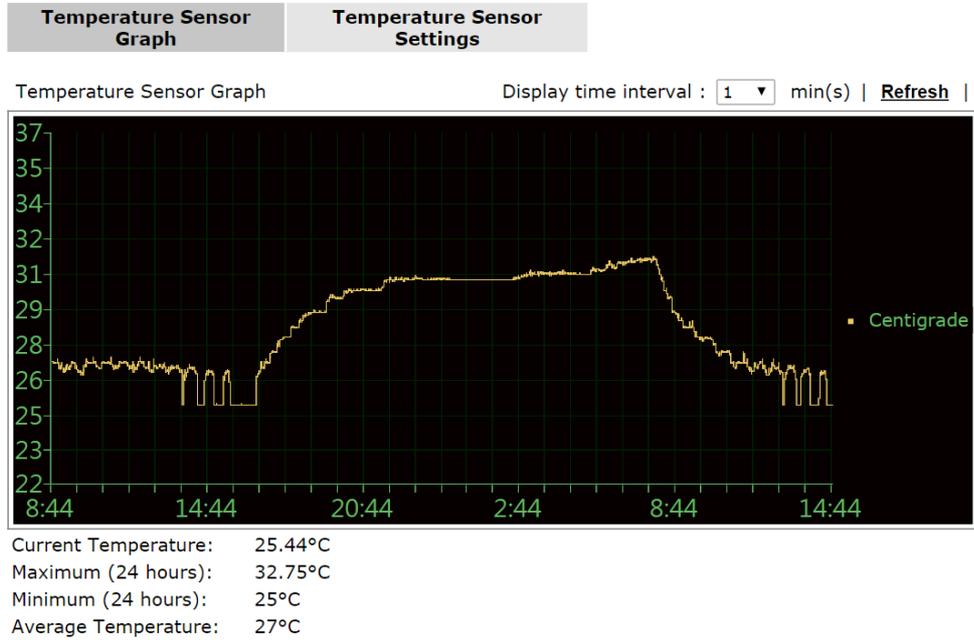

3.15 Mobile Device Management

Such feature can control / manage the mobile devices accessing the wireless network of VigorAP. VigorAP offers wireless LAN service for mobile device(s), PC users, MAC users or other users according to the policy selected.

Below shows the menu items for Mobile Device Management.



3.15.1 Detection

Such page displays mobile device(s) detected by VigorAP. Detected device(s) with Policy – **Pass** can access into the wireless LAN offered by VigorAP. Detected device(s) with Policy – **Block** are not allowed to access into Internet via VigorAP's WLAN.

Mobile Device Management >> Detection

Enable Mobile Device Management

Refresh Seconds: 10 Page: 1 [Refresh](#)

| Index | OS | MAC | Vendor | Model | Policy |
|-------|---|-------------------|--------|-----------|--------|
| 1 |  | F0:DB:F8:1C:E4:9F | Apple | iPad | Pass |
| 2 |  | F4:F1:5A:8A:E8:89 | Apple | iPhone | Pass |
| 3 |  | 60:FA:CD:71:9B:91 | Apple | Detecting | Pass |
| 4 |  | 44:2A:60:80:15:D6 | Apple | Detecting | Pass |

Note : Please make sure your internet access is available before enabling MDM.

 iOS  Android  Windows  Linux  Others

Once you check/uncheck the box of **Enable Mobile Device Management** and click **OK**, VigorAP will reboot automatically to activate MDM.

At present, OS (for mobile device) categories supported by VigorAP include:

- Windows
- Linux
- iOS
- Andorid
- WindowsPhone
- BlackBerry
- Symbian.

3.15.2 Policies

Such page determines which devices (mobile, PC, MAC or others) allowed to make network connections via VigorAP or blocked by VigorAP.

Mobile Device Management >> Policy

Block Mobile Connections (OS:Android,iOS...)

Block PC Connections (OS:Windows,Linux,iMac...)

Block Unknown Connections (OS:Others)

WiFi(2.4GHz) SSID1 SSID2 SSID3 SSID4

WiFi(5GHz) SSID1 SSID2 SSID3 SSID4


Each item is explained as follows:

| Item | Description |
|----------------------------------|--|
| Block Mobile Connections | All of mobile devices will be blocked and not allowed to access into Internet via VigorAP. |
| Block PC Connections | All of network connections based on PC, MAC or Linux platform will be blocked and terminated. |
| Block Unknown Connections | Only the unknown network connections (unable to be recognized by Vigor router) will be blocked and terminated. |
| WiFi(2.4GHz) | Specify the SSID(s) to apply such policy. |
| WiFi(5GHz) | Specify the SSID(s) to apply such policy. |

After finished the policy selection, click **OK**. VigorAP will *reboot* to activate the new policy automatically.

3.15.3 Statistics

The number of detected devices and the number of device(s) passed/blocked according to the policy specified in **Mobile Device Management>>Policy** can be illustrated as doughnut chart.

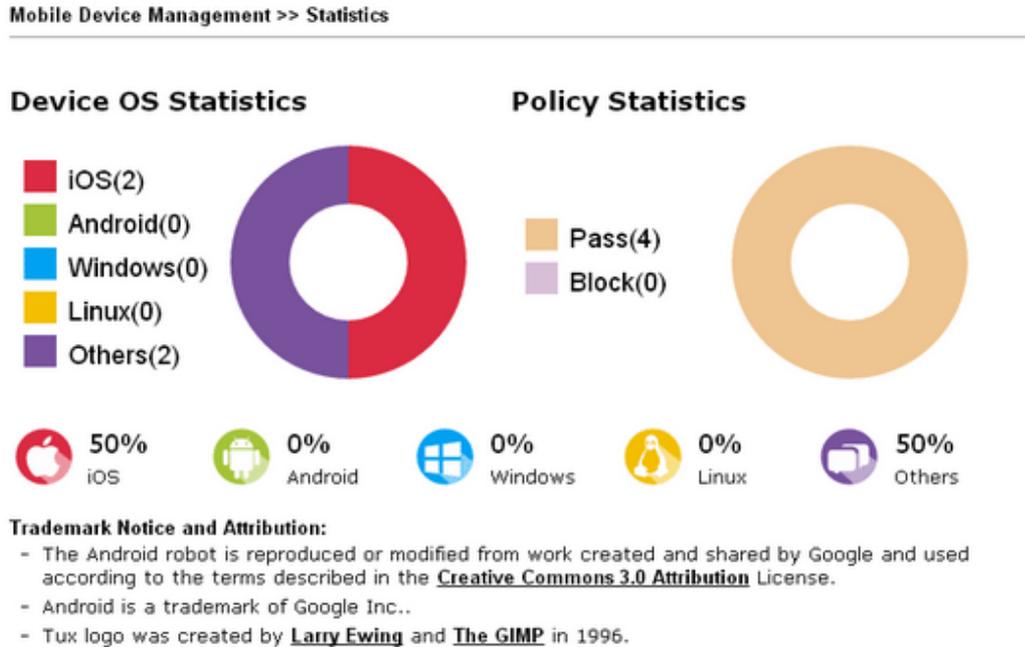

3.16 System Maintenance

For the system setup, there are several items that you have to know the way of configuration: Status, TR-069, Administration Password, Configuration Backup, Syslog/Mail Alert, Time and Date, SNMP, Management, Reboot System, and Firmware Upgrade.

Below shows the menu items for System Maintenance.



3.16.1 System Status

The **System Status** provides basic network settings of Vigor modem. It includes LAN and WAN interface information. Also, you could get the current running firmware version or firmware related information from this presentation.

System Status

Model : VigorAP902
Device Name : VigorAP902
Firmware Version : 1.2.3.1
Build Date/Time : r7791 Fri Nov 17 15:07:58 CST 2017
System Uptime : 0d 01:16:54
Operation Mode : AP

| System | |
|---------------|-----------------------|
| Memory Total | : 62332 kB |
| Memory Left | : 19372 kB |
| Cached Memory | : 24060 kB / 62332 kB |

| LAN-A | |
|-------------|---------------------|
| MAC Address | : 00:1D:AA:3D:54:90 |
| IP Address | : 192.168.1.10 |
| IP Mask | : 255.255.255.0 |

| Wireless LAN (2.4GHz) | |
|-----------------------|---------------------|
| MAC Address | : 00:1D:AA:3D:54:90 |
| SSID | : MK-902-mamie |
| Channel | : 11 |
| Driver Version | : 2.7.2.0 |

| LAN-B | |
|-------------|---------------------|
| MAC Address | : 00:1D:AA:3D:54:90 |
| IP Address | : 192.168.2.2 |
| IP Mask | : 255.255.255.0 |

| Wireless LAN (5GHz) | |
|---------------------|---------------------|
| MAC Address | : 00:1D:AA:3D:54:91 |
| SSID | : MK-902-mamie |
| Channel | : 100 |
| Driver Version | : 3.0.3.2 |

WARNING: Your AP is still set to default password. You should change it via System Maintenance menu.

Each item is explained as follows:

| Item | Description |
|-----------------------------------|--|
| Model /Device Name | Display the model name of the modem. |
| Firmware Version | Display the firmware version of the modem. |
| Build Date/Time | Display the date and time of the current firmware build. |
| System Uptime | Display the period that such device connects to Internet. |
| Operation Mode | Display the operation mode that the device used. |
| System | |
| Memory total | Display the total memory of your system. |
| Memory left | Display the remaining memory of your system. |
| LAN-A/LAN-B | |
| MAC Address | Display the MAC address of the LAN Interface. |
| IP Address | Display the IP address of the LAN interface. |
| IP Mask | Display the subnet mask address of the LAN interface. |
| Wireless LAN (2.4GHz/5GHz) | |
| MAC Address | Display the MAC address of the WAN Interface. |
| SSID | Display the SSID of the device. |
| Channel | Display the channel that the station used for connecting with such device. |

3.16.2 TR-069

This device supports TR-069 standard. It is very convenient for an administrator to manage a TR-069 device (Vigor router, AP and etc.) through VigorACS (Auto Configuration Server).

System Maintenance >> TR-069 Settings

ACS Settings

URL:

Username:

Password:

Event Code:

Last Inform Response Time :Thu Nov 30 2017 23:51:02 GMT+0800 (台北標準時間) ●

CPE Settings

Enable:

SSL(HTTPS) Mode:

On:

URL:

Port:

Username:

Password:

DNS Server IP Address

Primary IP Address:

Secondary IP Address:

Note: SSL(HTTPS) Mode only works when Vigor ACS SI is 1.1.6 and above version.
Please set default gateway, no matter choose LAN-A or LAN-B.

Periodic Inform Settings

Enable:

Interval Time: second(s)

STUN Settings

Enable Disable

Server Address:

Server Port:

Minimum Keep Alive Period: second(s)

Maximum Keep Alive Period: second(s)

Available settings are explained as follows:

| Item | Description |
|---------------------|--|
| ACS Settings | <p>URL/Username/Password – Such data must be typed according to the ACS (Auto Configuration Server) you want to link. Please refer to Auto Configuration Server user’s manual for detailed information.</p> <p>Wizard – Click it to enter the IP address of VigorACS server, port number and the handler.</p> <p>Test With Inform – Click it to send a message based on the event code selection to test if such CPE is able to communicate with VigorACS SI server.</p> <p>Event Code – Use the drop down menu to specify an event to perform the test.</p> |

| | |
|--|---|
| | <p>Last Inform Response Time – Display the time that VigorACS server made a response while receiving Inform message from CPE last time.</p> |
| <p>CPE Settings</p> | <p>Such information is useful for Auto Configuration Server (ACS). Enable– Check the box to allow the CPE Client to connect with Auto Configuration Server. SSL(HTTPS) Mode - Check the box to allow the CPE client to connect with ACS through SSL. On – Choose the interface (LAN-A or LAN-B) for VigorAP 902 connecting to ACS server. Port – Sometimes, port conflict might be occurred. To solve such problem, you might change port number for CPE. Username/Password – Type the username and password that VigorACS can use to access into such CPE. DNS Server IP Address – Such field is to specify the IP address if a URL is configured with a domain name.</p> <ul style="list-style-type: none"> ● Primary IP Address –You must specify a DNS server IP address here because your ISP should provide you with usually more than one DNS Server. If your ISP does not provide it, the modem will automatically apply default DNS Server IP address: 194.109.6.66 to this field. ● Secondary IP Address –You can specify secondary DNS server IP address here because your ISP often provides you more than one DNS Server. If your ISP does not provide it, the modem will automatically apply default secondary DNS Server IP address: 194.98.0.1 to this field. |
| <p>Periodic Inform Settings</p> | <p>The default setting is Enable. Please set interval time or schedule time for the AP to send notification to VigorACS server. Or click Disable to close the mechanism of notification. Interval Time – Type the value for the interval time setting. The unit is “second”.</p> |
| <p>STUN Settings</p> | <p>The default is Disable. If you click Enable, please type the relational settings listed below: Server Address – Type the IP address of the STUN server. Server Port – Type the port number of the STUN server. Minimum Keep Alive Period – If STUN is enabled, the CPE must send binding request to the server for the purpose of maintaining the binding in the Gateway. Please type a number as the minimum period. The default setting is “60 seconds”. Maximum Keep Alive Period – If STUN is enabled, the CPE must send binding request to the server for the purpose of maintaining the binding in the Gateway. Please type a number as the maximum period. A value of “-1” indicates that no maximum period is specified.</p> |

After finishing this web page configuration, please click **OK** to save the settings.

3.16.3 Administrator Password

This page allows you to set new password for accessing into web user interface of VigorAP.

System Maintenance >> Administration Password

Administrator Settings

| | |
|---|---|
| Account | <input type="text" value="admin"/> |
| Password | <input type="password" value="*****"/> |
| Confirm Password | <input type="password"/> |
| Password Strength: | <input type="button" value="Weak"/> <input type="button" value="Medium"/> <input type="button" value="Strong"/> |
| Strong password requirements: | |
| 1. Have at least one upper-case letter and one lower-case letter. | |
| 2. Including non-alphanumeric characters is a plus. | |

Note : Authorization Account can contain only a-z A-Z 0-9 , ~ ` ! @ \$ % ^ * () _ + = { } [] | ; < > . ?
 Authorization Password can contain only a-z A-Z 0-9 , ~ ` ! @ # \$ % ^ & * () _ + = { } [] \ ;
 < > . ? /

Available settings are explained as follows:

| Item | Description |
|--------------------------|--|
| Account | Type the name for accessing into Web User Interface. |
| Password | Type in new password in this filed. |
| Confirm Password | Type the new password again for confirmation. |
| Password Strength | The system will display the password strength (represented with the word of weak, medium or strong) of the password specified above. |

When you click **OK**, the login window will appear. Please use the new password to access into the web user interface again.

3.16.4 Configuration Backup

Backup the Configuration

Follow the steps below to backup your configuration.

1. Go to **System Maintenance >> Configuration Backup**. The following windows will be popped-up, as shown below.

System Maintenance >> Configuration Backup

Configuration Backup / Restoration

Restoration

Select a configuration file.
 未選擇檔案

Please enter the password and click Restore to upload the configuration file.
Password (optional):

Note: 1. You will need the same password to do configuration restoration.
2. The configuration file from the supported model list would be adopted.

Backup

Please specify a password and click Backup to download current configuration as an encrypted file.

Protect with password


Password (Max. 23 characters allowed)

Confirm Password


Supported Model List

| Model | Note |
|-------|--|
| AP810 | If AP902's CountryCode is different from AP810, the Channel value of AP810 would not be applied to AP902. |
| AP900 | If AP902's CountryCode is different from AP900, the Channel value of AP900 would not be applied to AP902. If AP902's 5G wireless mode is 11ac, the 5G wireless mode and Channel bandwidth of AP900 would not be applied to AP902. |

2. Click **Backup** button to get into the following dialog. Click **Save** button to open another dialog for saving configuration as a file.

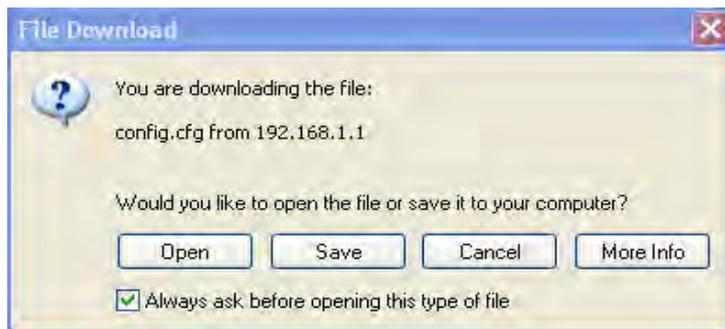

3. In **Save As** dialog, the default filename is **config.cfg**. You could give it another name by yourself.

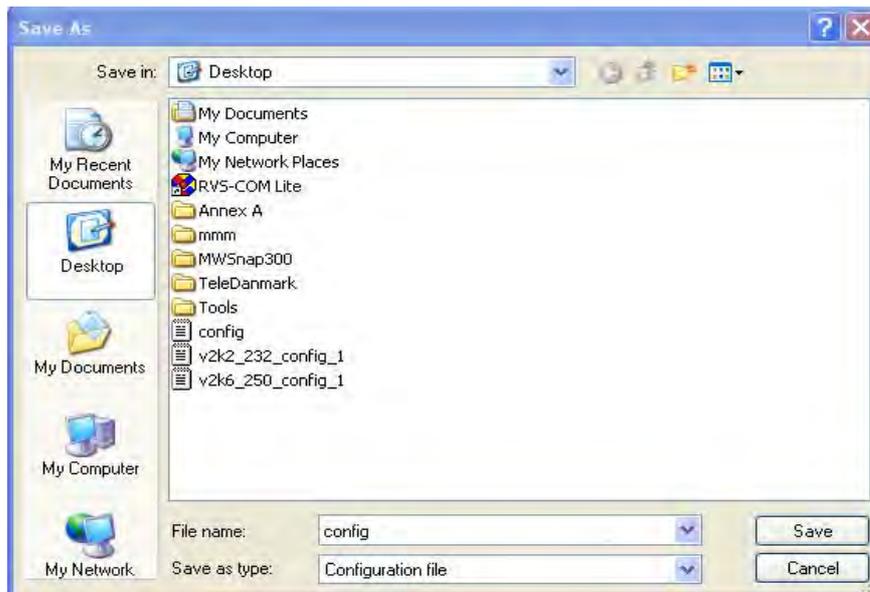

4. Click **Save** button, the configuration will download automatically to your computer as a file named **config.cfg**.

The above example is using **Windows** platform for demonstrating examples. The **Mac** or **Linux** platform will appear different windows, but the backup function is still available.

Note: Backup for Certification must be done independently. The Configuration Backup does not include information of Certificate.

Restore Configuration

1. Go to **System Maintenance >> Configuration Backup**. The following windows will be popped-up, as shown below.

System Maintenance >> Configuration Backup

Configuration Backup / Restoration

Restoration

Select a configuration file.

未選擇檔案

Please enter the password and click Restore to upload the configuration file.

Password (optional):

Note: 1. You will need the same password to do configuration restoration.
2. The configuration file from the supported model list would be adopted.

Backup

Please specify a password and click Backup to download current configuration as an encrypted file.

Protect with password

Password (Max. 23 characters allowed)

Confirm Password

Supported Model List

| Model | Note |
|-------|--|
| AP810 | If AP902's CountryCode is different from AP810, the Channel value of AP810 would not be applied to AP902. |
| AP900 | If AP902's CountryCode is different from AP900, the Channel value of AP900 would not be applied to AP902. If AP902's 5G wireless mode is 11ac, the 5G wireless mode and Channel bandwidth of AP900 would not be applied to AP902. |

2. Click **Browse** button to choose the correct configuration file for uploading to the

modem.

3. Click **Restore** button and wait for few seconds, the following picture will tell you that the restoration procedure is successful.

3.16.5 Syslog/Mail Alert

SysLog function is provided for users to monitor AP. There is no bother to directly get into the Web user interface of the AP or borrow debug equipments.

System Maintenance >> Syslog / Mail Alert Setup

Syslog Access Setup

| | |
|-------------------|--------------------------------------|
| Enable | <input type="checkbox"/> |
| Server IP Address | <input type="text"/> |
| Destination Port | 514 |
| Log Level | All <input type="button" value="v"/> |

Mail Alert Setup

| | |
|---|-------------------------------------|
| Enable | <input type="checkbox"/> |
| SMTP Server | <input type="text"/> |
| Mail To | <input type="text"/> |
| Mail From | <input type="text"/> |
| User Name | <input type="text"/> |
| Password | <input type="text"/> |
| Use TLS | <input checked="" type="checkbox"/> |
| Enable E-Mail Alert: | |
| <input checked="" type="checkbox"/> When Admin Login AP | |

Available settings are explained as follows:

| Item | Description |
|----------------------------|---|
| Syslog Access Setup | <p>Enable - Check Enable to activate function of Syslog.</p> <p>Server IP Address -The IP address of the Syslog server.</p> <p>Destination Port -Assign a port for the Syslog protocol. The default setting is 514.</p> <p>Log Level - Specify which level of the severity of the event will be recorded by Syslog.</p> |
| Mail Alert Setup | <p>Check Enable to activate function of mail alert.</p> <p>SMTP Server - The IP address of the SMTP server.</p> <p>Mail To - Assign a mail address for sending mails out.</p> <p>Mail From - Assign a path for receiving the mail from outside.</p> <p>User Name - Type the user name for authentication.</p> <p>Password - Type the password for authentication.</p> <p>Use TLS – Check this box to encrypt alert mail. However, if the SMTP server specified here does not support TLS protocol, the alert mail with encrypted data will not be received by the receiver.</p> <p>Enable E-Mail Alert - VigorAP will send an e-mail out when a user accesses into the user interface by using web or telnet.</p> |

3.16.6 Time and Date

It allows you to specify where the time of VigorAP should be inquired from.

System Maintenance >> Time and Date

Time Information

| | | |
|---------------------|------------------------------|--------------|
| Current System Time | Fri Jun 21 15:03:41 GMT 2013 | Inquire Time |
|---------------------|------------------------------|--------------|

Time Setting

| | | |
|---|----------------------------------|-------------|
| <input type="radio"/> Use Browser Time | | |
| <input checked="" type="radio"/> Use NTP Client | | |
| Time Zone | (GMT-11:00) Midway Island, Samoa | |
| NTP Server | | Use Default |
| Daylight Saving | <input type="checkbox"/> | |
| NTP synchronization | 30 sec | |

OK Cancel

Available parameters are explained as follows:

| Item | Description |
|----------------------------|--|
| Current System Time | Click Inquire Time to get the current time. |
| Use Browser Time | Select this option to use the browser time from the remote administrator PC host as router's system time. |
| Use NTP Client | Select to inquire time information from Time Server on the Internet using assigned protocol. |
| Time Zone | Select a time protocol. |
| NTP Server | Type the IP address of the time server. Use Default – Click it to choose the default NTP server. |
| Daylight Saving | Check the box to enable the daylight saving. Such feature is available for certain area. |
| NTP synchronization | Select a time interval for updating from the NTP server. |

Click **OK** to save these settings.

3.16.7 SNMP

This page allows you to configure settings for SNMP and SNMPV3 services.

The SNMPv3 is **more secure than** SNMP through the authentication method (support e.g., MD5) for the management needs.

System Maintenance >> SNMP

SNMP Agent

| | |
|---|--------------------------------------|
| <input checked="" type="checkbox"/> Enable SNMP Agent | |
| <input checked="" type="checkbox"/> Enable SNMPV3 Agent | |
| USM User | <input type="text"/> |
| Auth Algorithm | MD5 <input type="button" value="v"/> |
| Auth Password | <input type="text"/> |

Note: SNMP V1/V2c is read-only and SNMP V3 is read-write.

Available settings are explained as follows:

| Item | Description |
|----------------------------|---|
| Enable SNMP Agent | Check it to enable this function. |
| Enable SNMPV3 Agent | Check it to enable this function. |
| USM User | USM means user-based security mode. Type a username which will be used for authentication. The maximum length of the text is limited to 23 characters. |
| Auth Algorithm | Choose one of the encryption methods listed below as the authentication algorithm. |
| Auth Password | Type a password for authentication. The maximum length of the text is limited to 23 characters. |

Click **OK** to save these settings.

3.16.8 Management

This page allows you to specify the port number for HTTP and HTTPS server.

System Maintenance >> Management

Device Name

Name

Management Port Setup

HTTP Port
 HTTPS Port

Wi-Fi Hardware Button Setup

Wi-Fi Hardware Button Function

Telnet Setup

Telnet Server

LED Setup

LED Status

Available parameters are explained as follows:

| Item | Description |
|------------------------------------|---|
| Device Name | Name - The default setting is VigorAP 902. Change the name if required. |
| Management Port Setup | HTTP port/HTTPS port -Specify user-defined port numbers for the HTTP and HTTPS servers. |
| Wi-Fi Hardware Button Setup | Stop people manually disabling the wireless if they do not have the right of administration to access to the device. Enable – Choose it to enable the hardware button function. Disable – Choose it to disable the hardware button function. |
| Telnet Server | Enable – The administrator / user can access into the command line interface of VigorAP remotely for configuring settings. Disable – The administrator / user is unable to access into the command line interface of VigorAP remotely for configuring settings. |
| LED Setup | The color of LED (on or flashing) can be switched on or off to meet your favor. Enable – The LED will flash to indicate VigorAP is ready and able to work normally. Disable –The LEDs blink always since VigorAP is powered on. Some people might not like that. Therefore the function of LED is allowed to be disabled to make people feeling |

| | |
|--|---|
| | comfortable and undisturbed. When Disable is chosen, all the LEDs on VigorAP will light off immediately after clicking OK . |
|--|---|

3.16.9 Reboot System

The web user interface may be used to restart your modem. Click **Reboot System** from **System Maintenance** to open the following page.

System Maintenance >> Reboot System

Reboot System

Do You want to reboot your AP ?

Using current configuration
 Using factory default configuration

If you want to reboot the modem using the current configuration, check **Using current configuration** and click **OK**. To reset the modem settings to default values, check **Using factory default configuration** and click **OK**. The modem will take 5 seconds to reboot the system.

Note: When the system pops up Reboot System web page after you configure web settings, please click **OK** to reboot your modem for ensuring normal operation and preventing unexpected errors of the modem in the future.

3.16.10 Firmware Upgrade

Before upgrading your modem firmware, you need to install the Modem Tools. The **Firmware Upgrade Utility** is included in the tools. The following web page will guide you to upgrade firmware by using an example. Note that this example is running over Windows OS (Operating System).

Download the newest firmware from DrayTek's web site or FTP site. The DrayTek web site is www.draytek.com (or local DrayTek's web site) and FTP site is [ftp.draytek.com](ftp://draytek.com).

Click **System Maintenance>> Firmware Upgrade** to launch the Firmware Upgrade Utility.

System Maintenance >> Firmware Upgrade

Firmware Update


Select a firmware file.

Click Upgrade to upload the file.

Click **Browse** to locate the newest firmware from your hard disk and click **Upgrade**.

3.17 Diagnostics

Diagnostic Tools provide a useful way to **view** or **diagnose** the status of your VigorAP 902.

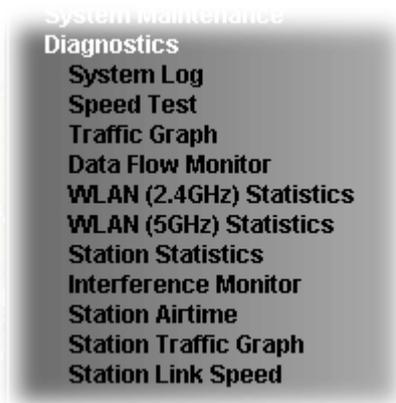

3.17.1 System Log

At present, only **System Log** is offered.

Diagnostics >> System Log

```
System Log Information | Clear | Refresh |  Line wrap |
0d 00:00:23 kernel: <-- RTMPAllocAdapterBlock, Status=0
0d 00:00:23 kernel: pAd->CSRBaseAddress =0xc07c0000, csr_addr=0xc07c0000!
0d 00:00:23 kernel: RtmpEepromGetDefault::e2p_dafault=2
0d 00:00:23 kernel: RtmpChipOpsEepromHook::e2p_type=2, inf_Type=5
0d 00:00:23 kernel: NVM is FLASH mode
0d 00:00:23 kernel: RX DESC a22af000 size = 4096
0d 00:00:23 kernel: WirelessRoaming_en=0
0d 00:00:23 kernel: WirelessRoaming_rate_en=0
0d 00:00:23 kernel: WirelessRoaming_rate_5g_en=0
0d 00:00:23 kernel: WirelessRoaming_rate=0
0d 00:00:23 kernel: WirelessRoaming_rate_5g=0
0d 00:00:23 kernel: STA_CTL=
0d 00:00:23 kernel: default ApCliAPSDCapable[0]=0
0d 00:00:23 kernel: 1 - TotalAllowedStaNum = 64.
0d 00:00:23 kernel: Key1Str is Invalid key length(0) or Type(0)
0d 00:00:23 kernel: Key1Str is Invalid key length(0) or Type(0)
```

3.17.2 Speed Test

Click the **Start** button on the page to test the speed. Such feature can help you to find the best installation place for Vigor AP.

Diagnostics >> Speed Test

Speed Test

Welcome to VigorAP902 Speed Test.

This test allows you to find out the best place for VigorAP902. You can execute the speed test at different places of the building and select the best location for it. The performance test result is only for your reference.

Start

3.17.3 Traffic Graph

Click **Traffic Graph** to open the web page. Choose one of the managed Access Points, LAN-A or LAN-B, daily or weekly for viewing data transmission chart. Click **Refresh** to renew the graph at any time.

Diagnostics >> Traffic Graph



The horizontal axis represents time; the vertical axis represents the transmission rate (in kbps).

3.17.4 Data Flow Monitor

This page displays general information for the client connecting to VigorAP 902..

Diagnostics >> Data Flow Monitor

Page: 1 Auto-refresh Refresh

| Index | MAC Address | Station | Tx rate(Kbps) | Rx rate(Kbps) | 2.4G / 5G | Action |
|-------|-------------------|-------------------------|---------------|---------------|-----------|--------|
| 1 | 40:98:AD:68:32:FD | 192.168.1.12_Mamies-... | 0 | 0 | 📶 | DeAuth |
| 2 | | | | | | |
| 3 | | | | | | |
| 4 | | | | | | |
| 5 | | | | | | |
| 6 | | | | | | |
| 7 | | | | | | |
| 8 | | | | | | |
| 9 | | | | | | |
| 10 | | | | | | |
| 11 | | | | | | |
| 12 | | | | | | |
| 13 | | | | | | |
| 14 | | | | | | |
| 15 | | | | | | |
| Total | | | 0 | 0 | 0 / 1 | |

Available parameters are explained as follows:

| Item | Description |
|---------------------|--|
| Auto-refresh | After checking this box, Vigor system will refresh such page periodically. |
| Refresh | Click this link to refresh this page immediately. |
| Index | Display the number of the data flow. |
| MAC Address | Display the MAC address of the monitored device. |

| | |
|-----------------------|--|
| Station | Display the IP address/host name of the wireless client. |
| TX rate (kbps) | Display the transmission speed of the monitored device. |
| RX rate (kbps) | Display the receiving speed of the monitored device. |
| 2.4G/5G | Display what wireless band (2.4G or 5G) used by the wireless client. |
| Action | DeAuth – Deauthenticate a wireless station. |

3.17.5 WLAN (2.4GHz) Statistics

Such page is used for debug by RD only.

Diagnostics >> WLAN (2.4GHz) Statistics

Auto-Refresh

| | | | |
|---------------------------------------|-------|---------------------------------------|--------|
| Tx success | 43846 | Rx success | 387111 |
| Tx retry count | 0 | Rx with CRC | 145551 |
| Tx fail to Rcv ACK after retry | 0 | Rx drop due to out of resource | 0 |
| RTS Success Rcv CTS | 0 | Rx duplicate frame | 0 |
| RTS Fail Rcv CTS | 0 | False CCA (one second) | 0 |
| TransmitCountFromOS | 1007 | MulticastReceivedFrameCount | 0 |
| TransmittedFragmentCount | 43846 | RealFcsErrCount | 145551 |
| TransmittedFrameCount | 43846 | WEPUndecryptableCount | 0 |
| MulticastTransmittedFrameCount | 0 | MultipleRetryCount | 0 |
| TransmittedAMSDUCount | 0 | ACKFailureCount | 0 |
| TransmittedOctetsInAMSDU | 0 | ReceivedAMSDUCount | 0 |
| TransmittedAMPDUCount | 0 | ReceivedOctesInAMSDUCount | 0 |
| TransmittedMPDUInAMPDUCount | 0 | MPDUInReceivedAMPDUCount | 0 |
| TransmittedOctetsInAMPDUCount | 0 | fAnyStaFortyIntolerant | 0 |

| | SSID1 (DrayTek-LAN-A) | SSID2 (DrayTek-LAN-B) | SSID3 (N/A) | SSID4 (N/A) |
|-------------------------------|--------------------------|--------------------------|----------------|----------------|
| Packets Received | 0 | 0 | N/A | N/A |
| Packets Sent | 0 | 0 | N/A | N/A |
| Bytes Received | 0 | 0 | N/A | N/A |
| Byte Sent | 0 | 0 | N/A | N/A |
| Error Packets Received | 0 | 0 | N/A | N/A |
| Drop Received Packets | 0 | 0 | N/A | N/A |

3.17.6 WLAN (5GHz) Statistics

Such page is used for debug by RD only.

Diagnostics >> WLAN (5GHz) Statistics

Auto-Refresh

| | | | |
|--------------------------------|-------|--------------------------------|--------|
| Tx success | 12104 | Rx success | 468283 |
| Tx retry count | 0 | Rx with CRC | 212904 |
| Tx fail to Rcv ACK after retry | 0 | Rx drop due to out of resource | 0 |
| RTS Success Rcv CTS | 0 | Rx duplicate frame | 0 |
| RTS Fail Rcv CTS | 0 | False CCA (one second) | 10449 |
| TransmitCountFromOS | 1013 | MulticastReceivedFrameCount | 0 |
| TransmittedFragmentCount | 12104 | RealFcsErrCount | 212904 |
| TransmittedFrameCount | 12104 | WEPUndecryptableCount | 0 |
| MulticastTransmittedFrameCount | 0 | MultipleRetryCount | 0 |
| TransmittedAMSDUCount | 0 | ACKFailureCount | 0 |
| TransmittedOctetsInAMSDU | 0 | ReceivedAMSDUCount | 0 |
| TransmittedAMPDUCount | 0 | ReceivedOctetsInAMSDUCount | 0 |
| TransmittedMPDUInAMPDUCount | 0 | MPDUInReceivedAMPDUCount | 0 |
| TransmittedOctetsInAMPDUCount | 0 | fAnyStaFortyIntolerant | 0 |

| | SSID1 (DrayTek5G-LAN-A) | SSID2 (DrayTek5G-LAN-B) | SSID3 (N/A) | SSID4 (N/A) |
|------------------------|----------------------------|----------------------------|----------------|----------------|
| Packets Received | 0 | 0 | N/A | N/A |
| Packets Sent | 0 | 0 | N/A | N/A |
| Bytes Received | 0 | 0 | N/A | N/A |
| Byte Sent | 0 | 0 | N/A | N/A |
| Error Packets Received | 0 | 0 | N/A | N/A |
| Drop Received Packets | 0 | 0 | N/A | N/A |

3.17.7 Station Statistics


Such page is used for debug or for the user to observe network traffic and network quality.

Diagnostics >> Station Statistics


Show Chart: Nearby & Connected Number

[Refresh](#)


Hourly Nearby & Connected Number

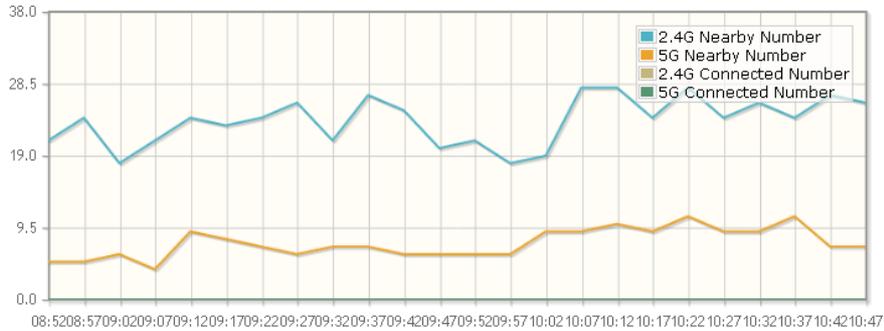

Daily Nearby & Connected Number Daily Connected Number Analysis

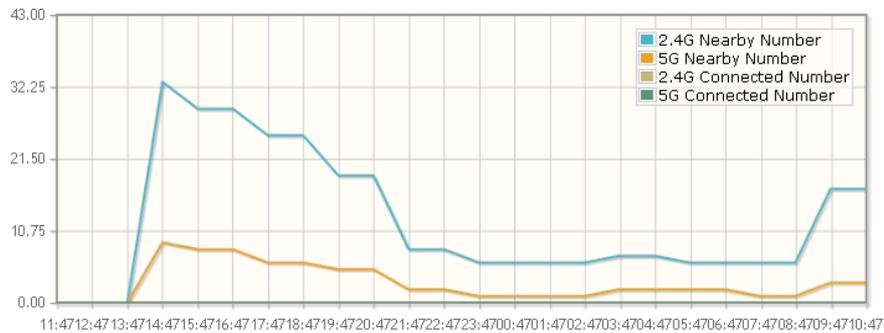

Weekly Nearby & Connected Number Weekly Connected Number Analysis

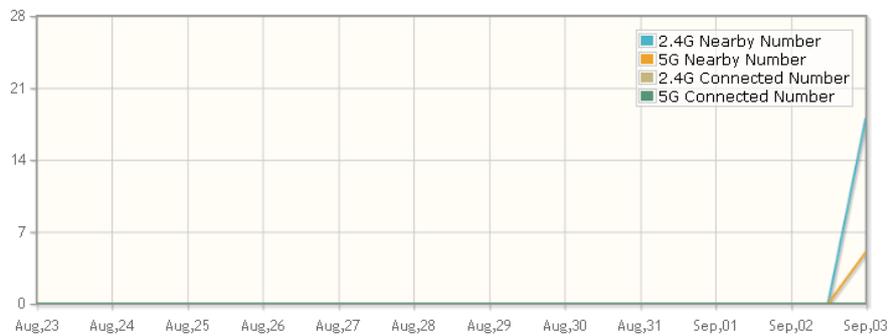

Note : Only browser supporting [HTML5](#) can display Station Statistics correctly.

Available parameters are explained as follows:

| Item | Description |
|------------|--|
| Show Chart | <p>Choose one of the items to display the statistics chart for wireless stations.</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> Nearby & Connected Number ▾ Nearby & Connected Number Visiting & Passing Number Visiting Time </div> <p>Nearby & Connected Number – Choose it to have the statistics of the wireless stations which is nearby and</p> |

connected to VigorAP 902.


Visiting & Passing Number – Choose it to have the statistics of the wireless stations which is visiting and passing to VigorAP 902.

Visiting Time - Choose it to have the statistics of the wireless stations which is visiting VigorAP 902.

Daily Connected Number Analysis / Daily Visiting Number Analysis

Click this button to get analysis pie chart for daily connected wireless stations / daily visiting wireless station.

Daily 2.4G Connected & Not Connected Number Analysis

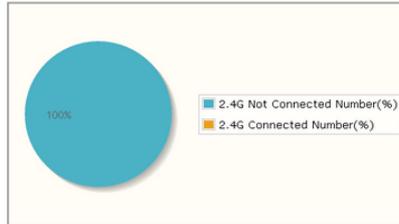


Peak of Connected Station Number:
Time: 14:58-13:58 Number: 0

Off-peak of Connected Station Number:
Time: 14:58-13:58 Number: 0

Peak of Nearby Station Number:
Time: 19:58-20:58 Number: 12

Off-peak of Nearby Station Number:
Time: 14:58-17:58 Number: 0

Daily 5G Connected & Not Connected Number Analysis

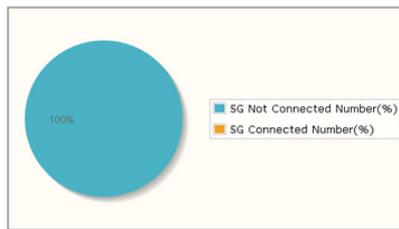

Peak of Connected Station Number:
Time: 14:58-13:58 Number: 0

Off-peak of Connected Station Number:
Time: 14:58-13:58 Number: 0


Peak of Nearby Station Number:
Time: 19:58-20:58 Number: 3
Time: 13:58 Number: 3

Off-peak of Nearby Station Number:
Time: 14:58-17:58 Number: 0

Weekly Connected Number Analysis / Weekly Visiting Number Analysis

Click this button to get analysis pie chart for weekly connected wireless stations / weekly visiting wireless station.

Weekly 2.4G Connected & Not Connected Number Analysis

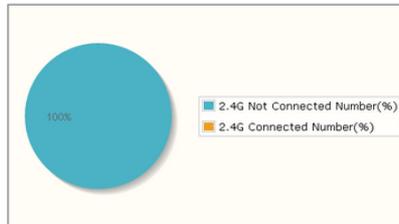


Peak of Connected Station Number:
Time: 2015-8-22(Sun)-2015-9-3(Thu) Number: 0

Off-peak of Connected Station Number:
Time: 2015-8-22(Sun)-2015-9-3(Thu) Number: 0

Peak of Nearby Station Number:
Time: 2015-9-2(Wed) Number: 4

Off-peak of Nearby Station Number:
Time: 2015-8-22(Sun)-2015-9-2(Wed) Number: 0
Time: 2015-9-3(Thu) Number: 0

Weekly 5G Connected & Not Connected Number Analysis

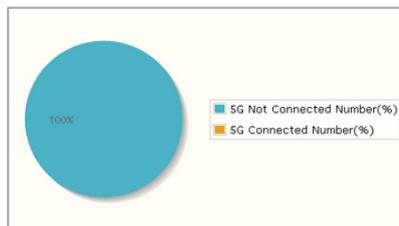

Peak of Connected Station Number:
Time: 2015-8-22(Sun)-2015-9-3(Thu) Number: 0

Off-peak of Connected Station Number:
Time: 2015-8-22(Sun)-2015-9-3(Thu) Number: 0

Peak of Nearby Station Number:
Time: 2015-9-2(Wed) Number: 1

Off-peak of Nearby Station Number:
Time: 2015-8-22(Sun)-2015-9-2(Wed) Number: 0
Time: 2015-9-3(Thu) Number: 0


3.17.8 Interference Monitor

As an interference detector, VigorAP can detect all of the environmental interference factors for certain channel used or for all of the wireless channels.

Current Channel

The analysis page with information about wireless band, channel, transmission power, bandwidth, wireless mode, and country code chosen will be displayed on this page completely based on the wireless band (2.4G or 5G) selected. Also, channel status can be seen easily from this page.

Diagnostics >> Interference Monitor

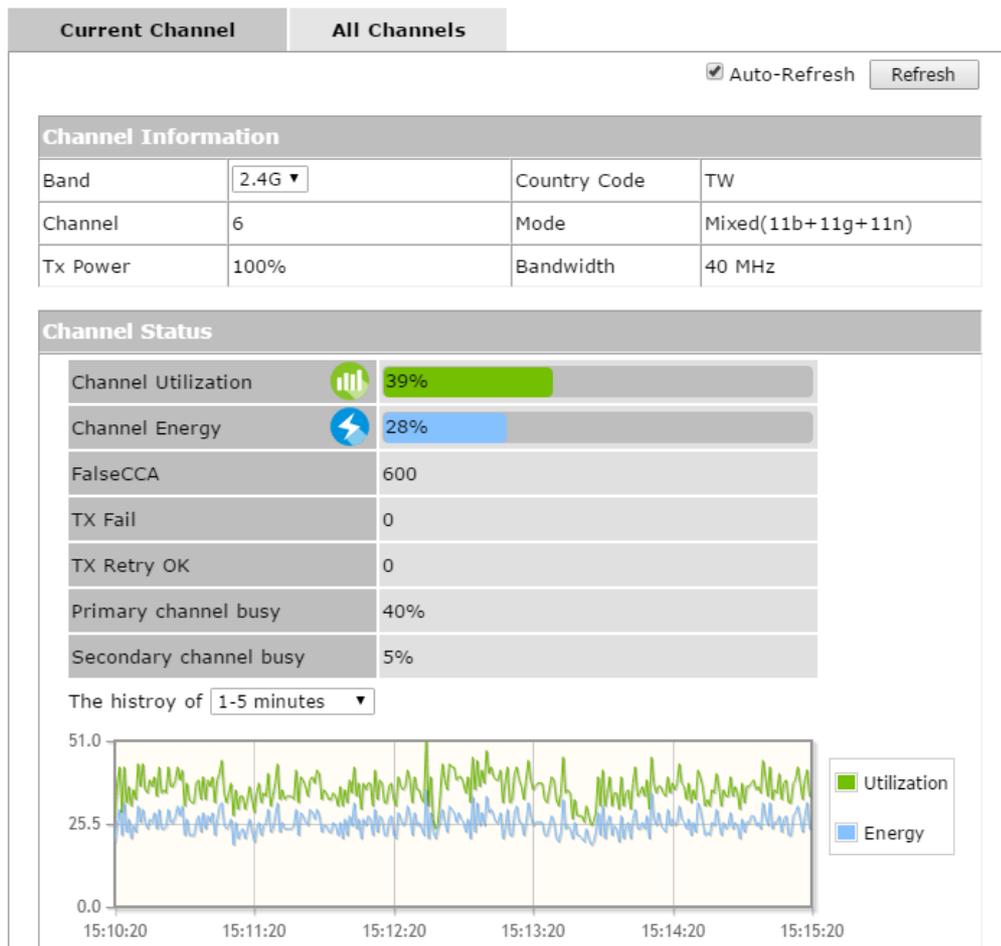

All Channels

This page displays the utilization and energy result for all channels based on 2.4G/5G. Click **Refresh** to get the newly update interference situation.

Diagnostics >> Interference Monitor

| Current Channel | All Channels | | |
|---|---------------------|----------------|-----|
| Band 2.4G ▾ Refresh | | | |
| Channel | Channel Utilization | Channel Energy | APs |
| 1 | 43% | 41% | 4 |
| 2 | 19% | 25% | 0 |
| 3 | 9% | 16% | 0 |
| 4 | 5% | 27% | 0 |
| 5 | 7% | 20% | 1 |
| 6 | 37% | 29% | 11 |
| 7 | 7% | 19% | 0 |
| 8 | 5% | 27% | 0 |
| 9 | 9% | 20% | 2 |
| 10 | 5% | 27% | 0 |
| 11 | 48% | 41% | 20 |

Last updated: 11/04 15:15:54

Note: During the scanning process, no station is allowed to connect with the AP.

3.17.9 Station Airtime


This page displays the operation status for 2.4GHz wireless stations within 30 minutes.

Diagnostics >> Station Airtime

Display: 2.4GHz ▾ Station 1-8 ▾ and the history of 1-5 minutes ▾ Airtime

[Refresh](#)

2.4GHz Tx Airtime

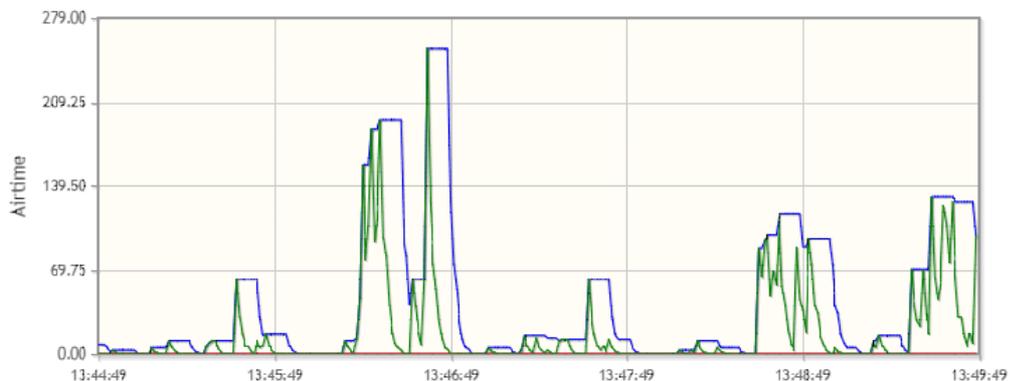

3.17.10 Station Traffic Graph


This page displays the data traffic (receiving/transmitting) status for 2.4GHz wireless stations within 30 minutes with a run chart.

Diagnostics >> Station Traffic Graph

Display: and the history of Throughput

[Refresh](#)

2.4GHz Tx Throughput

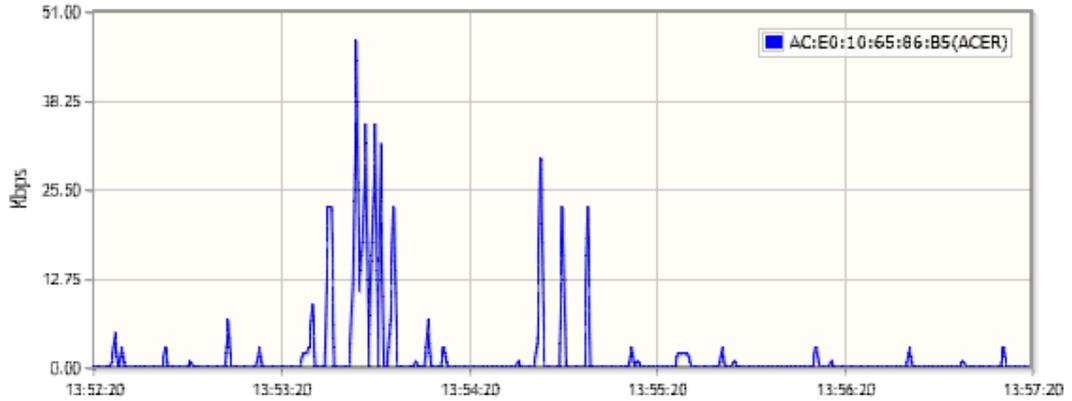

3.17.11 Station Link Speed


This page displays the link rate status for 2.4GHz/5GHz wireless stations within one hour with a run chart.

Diagnostics >> Station Link Speed

Display: Link rate

[Refresh](#)

2.4GHz Link Speed

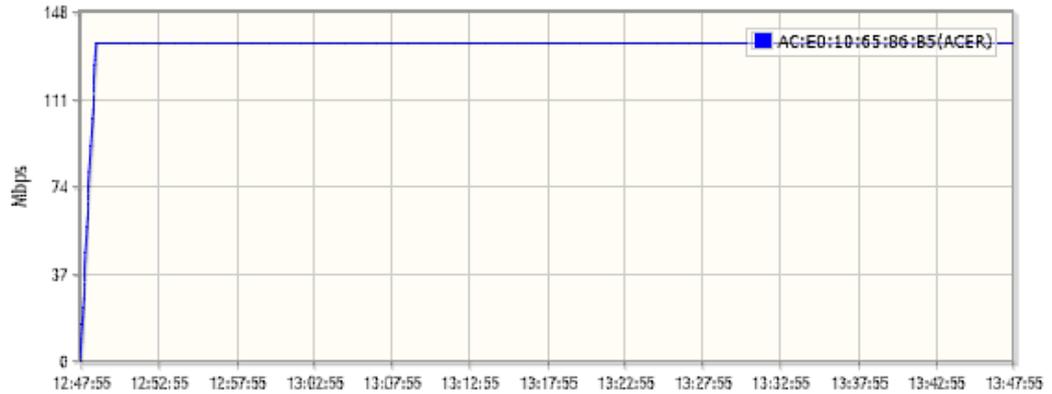

3.18 Support Area

When you click the menu item under **Support Area**, you will be guided to visit www.draytek.com and open the corresponding pages directly.

Support Area
FAQ/Application Note
Product Registration
All Rights Reserved

This page is left blank.


4

Applications

4.1 How to set different segments for different SSIDs in VigorAP 902

VigorAP 902 supports two network segments, LAN-A and LAN-B for different SSIDs. With such feature, the user can dispatch SSIDs with different network segments for reaching the target of managing wireless network. See the following figure.

Dual-LAN

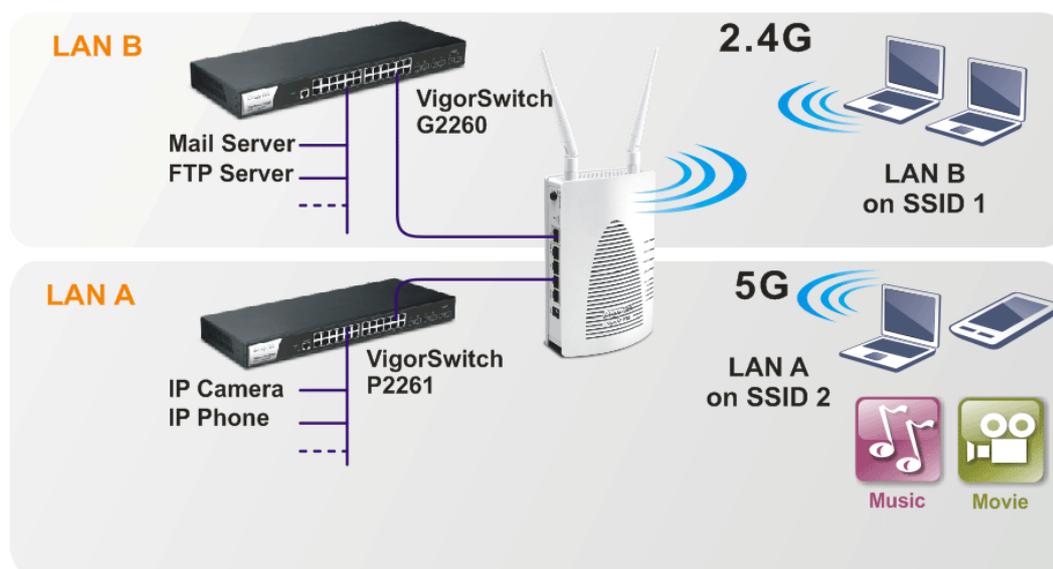

In the above figure, VigorAP 902 is used to control the wireless network connection. It can separate the wireless traffic between accessing internal server and the usage of video. Wireless station connecting to VigorAP 902 with SSID 2 can get the IP address with the network segment of 192.168.1.0/24 (LAN-A); wireless station connecting to VigorAP 902 with SSID 1 can get the IP address with the same network segment of 192.168.2.0/24 (LAN-B).

LAN-B : 192.168.2.0/24 →for internal server

LAN-A : 192.168.1.0/24 →for music, video traffic

Below shows you how to configure the web page for VigorAP 902:

1. In the page of **Operation Mode**, click **AP** mode for 2.4GHz Wireless and 5GHz Wireless.

Operation Mode Configuration

Wireless LAN (2.4GHz)

AP :

AP 900 acts as a bridge between wireless devices and wired Ethernet network, and exchanges data between them.

AP Bridge-Point to Point :

AP 900 will connect to another AP 900 which uses the same mode, and all wired Ethernet clients of both AP 900s will be connected together.

AP Bridge-Point to Multi-Point :

AP 900 will connect to up to four AP 900s which uses the same mode, and all wired Ethernet clients of every AP 900s will be connected together.

AP Bridge-WDS :

AP 900 will connect to up to four AP 900s which uses the same mode, and all wired Ethernet clients of every AP 900s will be connected together.
This mode is still able to accept wireless clients.

Universal Repeater :

AP 900 can act as a wireless repeater; it can be Station and AP at the same time.

Wireless LAN (5GHz)

AP :

AP 900 acts as a bridge between wireless devices and wired Ethernet network, and exchanges data between them.

2. Open **Wireless LAN(2.4GHz) >> General Setup** and then **Wireless LAN(5GHz) >> General Setup**. Choose the subnet **LAN-B** for SSID 1 and choose **LAN-A** for SSID 2. Specify the wireless channel. Then, click **OK** to save the configuration.

Wireless LAN (5GHz) >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN

Enable Limit Client (3-64) (default: 64)

Mode :

Enable 2 Subnet (Simulate 2 APs)

| | Hide SSID | SSID | Subnet | Isolate Member(0:Untagged) | VLAN ID | Mac Clone |
|---|--------------------------|--------|--------|----------------------------|---------|--------------------------|
| 1 | <input type="checkbox"/> | SSID 1 | LAN-B | <input type="checkbox"/> | 0 | <input type="checkbox"/> |
| 2 | <input type="checkbox"/> | SSID 2 | LAN-A | <input type="checkbox"/> | 0 | <input type="checkbox"/> |
| 3 | <input type="checkbox"/> | | LAN-A | <input type="checkbox"/> | 0 | <input type="checkbox"/> |
| 4 | <input type="checkbox"/> | | LAN-A | <input type="checkbox"/> | 0 | <input type="checkbox"/> |

Hide SSID: Prevent SSID from being scanned.

Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.

MAC Clone: Set the MAC address of SSID 1. The MAC addresses of other SSIDs and the Wireless client will also change based on this MAC address. Please notice that the last byte of this MAC address must be a multiple of 8.

Channel :

Extension Channel :

- Open **Wireless LAN(2.4GHz) >> Security Settings** and **Wireless LAN(5GHz) >> Security Settings**. Set the encryption method and set the password for SSID 1 and SSID 2 respectively.

SSID 1 SSID 2 SSID 3 SSID 4

Mode: Mixed(WPA+WPA2)/PSK

Set up **RADIUS Server** if 802.1x is enabled.

WPA

WPA Algorithms: TKIP AES TKIP/AES

Pass Phrase: [Masked]

Key Renewal Interval: 3600 seconds

PMK Cache Period: 10 minutes

Pre-Authentication: Disable Enable

WEP

Key 1 : [Field] Hex

Key 2 : [Field] Hex

Key 3 : [Field] Hex

Key 4 : [Field] Hex

802.1x WEP: Disable Enable

- Open **LAN>General Setup** to configure the settings for enabling DHCP server on LAN-A/LAN-B. If there is a DHCP server configured in the same network segment, skip this step.

LAN >> General Setup

Ethernet TCP / IP and DHCP Setup

LAN-A IP Network Configuration

VigorAP Management

Enable Client

Specify an IP address

IP Address: 192.168.1.2

Subnet Mask: 255.255.255.0

Default Gateway: [Field]

Enable Management VLAN

VLAN ID: 0

LAN-B IP Network Configuration

IP Address: 192.168.2.2

Subnet Mask: 255.255.255.0

Enable Management VLAN

VLAN ID: 0

DHCP Server Configuration (LAN-A)

Enable Server Disable Server

Relay Agent

Start IP Address: 192.168.1.10

End IP Address: 192.168.1.100

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.1.2

Lease Time: 86400

DHCP Server IP Address for Relay Agent: [Field]

Primary DNS Server: 168.95.1.1

Secondary DNS Server: 168.95.192.1

DHCP Server Configuration (LAN-B)

Enable Server Disable Server

Relay Agent

Start IP Address: 192.168.2.10

End IP Address: 192.168.2.100

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.2.2

Lease Time: 86400

DHCP Server IP Address for Relay Agent: [Field]

Primary DNS Server: 168.95.1.1

Secondary DNS Server: 168.95.192.1

OK Cancel

5. After finishing the above settings, the wireless equipment connecting to VigorAP 902 with SSID 1 can get the IP address assigned by LAN-B 192.168.2.0/24 for accessing the internal server. The wireless equipment connecting to VigorAP 902 with SSID 2 can get the IP address assigned by LAN-A 192.168.1.0/24 for using the video/audio uploading and downloading services.

4.2 How to use VigorAP in Universal Repeater Mode?

In your wireless network environment, if you want to:

- 1) install APs without Ethernet cable
- 2) extent the wireless coverage
- 3) solve the compatibility problems of WDS
- 4) get a better Wi-Fi performance

It is suggested to use Universal Repeater Mode on AP902 with a distinguishable SSID to extent the wireless signal from Vigor router (e.g., Vigor2830n).



Setting LAN on Vigor2830n

In this example we use single LAN with 192.168.1.x/24 segment, and the DHCP server is enabled.

1. Please go to **LAN >> General Setup >> Details Page** for LAN 1.

LAN >> General Setup

General Setup

| Index | Status | DHCP | IP Address | | |
|------------------|--------------------------|-------------------------------------|-------------|--------------|------|
| LAN 1 | V | V | 192.168.1.1 | Details Page | IPv6 |
| LAN 2 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | 192.168.2.1 | Details Page | |
| LAN 3 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | 192.168.3.1 | Details Page | |
| LAN 4 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | 192.168.4.1 | Details Page | |
| IP Routed Subnet | <input type="checkbox"/> | <input checked="" type="checkbox"/> | 192.168.0.1 | Details Page | |

2. Set up LAN 1.

LAN >> General Setup

| LAN 1 Ethernet TCP / IP and DHCP Setup | LAN 1 IPv6 Setup |
|--|---|
| <p>Network Configuration For NAT Usage</p> <p>1 IP Address: 192.168.1.1</p> <p>Subnet Mask: 255.255.255.0</p> <p>RIP Protocol Control: Disable</p> | <p>DHCP Server Configuration</p> <p>2 <input checked="" type="radio"/> Enable Server <input type="radio"/> Disable Server</p> <p><input type="checkbox"/> Enable Relay Agent</p> <p>3 Start IP Address: 192.168.1.10</p> <p>IP Pool Counts: 150</p> <p>Gateway IP Address: 192.168.1.1</p> <p>Lease Time: 259200 (s)</p> <p>DNS Server IP Address</p> <p>Primary IP Address: <input type="text"/></p> <p>Secondary IP Address: <input type="text"/></p> |

4

- (1) Enter the IP address and Subnet Mask.
 - (2) Enable the DHCP Server.
 - (3) Set the DHCP IP range.
 - (4) Click **OK**.
3. Go to **Online Status >> Physical Connection** to check if WAN is connected.

Online Status

| Physical Connection | | | System Uptime: 0day 0:7:44 | | |
|--------------------------|---------------|---------------------------|----------------------------|---------------------------|-------------------------------|
| IPv4 | | IPv6 | | | |
| LAN Status | | Primary DNS: 168.95.192.1 | | Secondary DNS: 168.95.1.1 | |
| IP Address | TX Packets | RX Packets | | | |
| 192.168.1.1 | 1928 | 3424 | | | |
| WAN 1 Status | | | | | >> Dial PPPoE |
| Enable | Line | Name | Mode | Up Time | |
| Yes | ADSL | | PPPoE | 00:00:00 | |
| IP | GW IP | TX Packets | TX Rate(Bps) | RX Packets | RX Rate(Bps) |
| --- | --- | 0 | 0 | 0 | 0 |
| Message [PPP Shutdown] | | | | | |
| WAN 2 Status | | | | | >> Drop PPPoE |
| Enable | Line | Name | Mode | Up Time | |
| Yes | Ethernet | | PPPoE | 0:00:08 | |
| IP | GW IP | TX Packets | TX Rate(Bps) | RX Packets | RX Rate(Bps) |
| 111.243.178.135 | 168.95.98.254 | 64 | 734 | 48 | 518 |

Setting Wireless LAN on Vigor2830n

1. Please go to **Wireless LAN >> General Setup**.

Wireless LAN >> General Setup

General Setting (IEEE 802.11)

Enable Wireless LAN **1**

Mode : Mixed(11b+11g+11n) **2**

Index(1-15) in [Schedule Setup](#):

Only schedule profiles that have the action "Force Down" are applied to the WLAN, all other actions are ignored.

| Enable | Hide SSID | SSID | Isolate Member | Isolate VPN |
|--------------------------|--------------------------|--------------|--------------------------|--------------------------|
| <input type="checkbox"/> | <input type="checkbox"/> | DrayTek-2830 | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> |

Isolate Member: Wireless clients (stations) with the same SSID cannot access for each other.
Isolate VPN: isolate wireless with remote dial-in and LAN to LAN VPN.

Channel: Channel 6, 2437MHz **4** Long Preamble:

Long Preamble: necessary for some old 802.11 b devices only(lower performance)

Packet-OVERDRIVE™
 Tx Burst

Note:
The same technology must also be supported in clients to boost WLAN performance.

| Rate Control | Enable | Upload | Download |
|--------------|--------------------------|---|---|
| SSID 1 | <input type="checkbox"/> | <input type="text" value="30000"/> kbps | <input type="text" value="30000"/> kbps |
| SSID 2 | <input type="checkbox"/> | <input type="text" value="30000"/> kbps | <input type="text" value="30000"/> kbps |
| SSID 3 | <input type="checkbox"/> | <input type="text" value="30000"/> kbps | <input type="text" value="30000"/> kbps |
| SSID 4 | <input type="checkbox"/> | <input type="text" value="30000"/> kbps | <input type="text" value="30000"/> kbps |

Note: range 100~50,000 kbps

5

(1) Please tick Enable Wireless LAN.

(2) Choose the Mode.

Note: To utilize the Universal Repeater Mode on VigorAP 902, it's required not to choose 11a mode here on Vigor2830n.

(3) Name a SSID.

(4) Choose a channel.

Note: To avoid signal interference, it's suggested to do a **Scan in Wireless LAN >> AP Discovery**, and choose an unoccupied or not-so-crowded channel.

(5) Click **OK**.

2. Setting the Security. Please go to **Wireless LAN >> Security**.

Wireless LAN >> Security Settings

| SSID 1 | SSID 2 | SSID 3 | SSID 4 |
|--|--------|--------|--------|
| Mode: Mixed(WPA+WPA2)/PSK 1 | | | |
| Set up RADIUS Server if 802.1x is enabled. | | | |
| WPA: | | | |
| Encryption Mode: TKIP for WPA/AES for WPA2 | | | |
| Pre-Shared Key(PSK): draytek2830 2 | | | |
| Type 8~63 ASCII character or 64 Hexadecimal digits leading by "0x", for example "cfigs01a2..." or "0x655abcd....". | | | |
| WEP: | | | |
| Encryption Mode: 64-Bit | | | |
| <input type="radio"/> Key 1 : <input type="text" value="*****"/> | | | |
| <input type="radio"/> Key 2 : <input type="text" value="*****"/> | | | |
| <input type="radio"/> Key 3 : <input type="text" value="*****"/> | | | |
| <input type="radio"/> Key 4 : <input type="text" value="*****"/> | | | |
| For 64 bit WEP key Type 5 ASCII character or 10 Hexadecimal digits leading by "0x", for example "AB312" or "0x4142333132". | | | |
| For 128 bit WEP key Type 13 ASCII character or 26 Hexadecimal digits leading by "0x", for example "0123456789abc" or "0x30313233343536373839414243". | | | |
| 3 OK Cancel | | | |

(1) Choose the Mode.

(2) Give a Pre-Shared Key.

Note: The Mode and Pre-shared Key will be needed when setting on VigorAP 902, and it's suggested to memorize them.

(3) Click **OK**.

Setting Operation Mode on AP902

Please go to **Operation Mode**, and choose **Universal Repeater**.

Wireless LAN (2.4GHz)

- AP :**
VigorAP acts as a bridge between wireless devices and wired Ethernet network, and exchanges data between them.
- Station-Infrastructure :**
Enable the Ethernet device as a wireless station and join a wireless network through an AP.
- AP Bridge-Point to Point :**
VigorAP will connect to another VigorAP which uses the same mode, and all wired Ethernet clients of both VigorAPs will be connected together.
- AP Bridge-Point to Multi-Point :**
VigorAP will connect to up to four VigorAPs which uses the same mode, and all wired Ethernet clients of every VigorAPs will be connected together.
- AP Bridge-WDS :**
VigorAP will connect to up to four VigorAPs which uses the same mode, and all wired Ethernet clients of every VigorAPs will be connected together.
This mode is still able to accept wireless clients.
- Universal Repeater :**
VigorAP can act as a wireless repeater; it can be Station and AP at the same time.

Wireless LAN (5GHz)

- AP :**
VigorAP acts as a bridge between wireless devices and wired Ethernet network, and exchanges data between them.
- AP Bridge-WDS :**
VigorAP will connect to up to four VigorAPs which uses the same mode, and all wired Ethernet clients of every VigorAPs will be connected together.
This mode is still able to accept wireless clients.
- Universal Repeater :**
VigorAP can act as a wireless repeater; it can be Station and AP at the same time.

OK

Setting LAN on AP902

Here we need to set AP902 using only one network segment, which is correspondent to the one used by Vigor2830n. Also the DHCP Server should be disabled, so users will be assigned IP addresses by Vigor2830n.

1. Please go to **Wireless LAN >> General Setup**, and remove the tick on “**Enable 2 Subnet**”. Please click **OK** to save setting.

Wireless LAN >> General Setup

General Setting (IEEE 802.11)

| <input checked="" type="checkbox"/> Enable Wireless LAN | | | | | | |
|---|---------------|--------|--------------------------|----------------------------|---------|--------------------------|
| Mode : Mixed(11b+11g+11n) | | | | | | |
| <input type="checkbox"/> Enable 2 Subnet (Simulate 2 APs) | | | | | | |
| Hide SSID | SSID | Subnet | Isolate LAN | Isolate Member(0:Untagged) | VLAN ID | Mac Clone |
| 1 <input type="checkbox"/> | DrayTek-LAN-A | LAN-A | <input type="checkbox"/> | <input type="checkbox"/> | 0 | <input type="checkbox"/> |
| 2 <input type="checkbox"/> | DrayTek-LAN-B | LAN-A | <input type="checkbox"/> | <input type="checkbox"/> | 0 | <input type="checkbox"/> |
| 3 <input type="checkbox"/> | | LAN-A | <input type="checkbox"/> | <input type="checkbox"/> | 0 | <input type="checkbox"/> |
| 4 <input type="checkbox"/> | | LAN-A | <input type="checkbox"/> | <input type="checkbox"/> | 0 | <input type="checkbox"/> |

2. Please go to **LAN >> General Setup**.

LAN >> General Setup

Ethernet TCP / IP and DHCP Setup

| LAN IP Network Configuration | | DHCP Server Configuration | |
|------------------------------|----------------------|-------------------------------------|---|
| IP Address | 192.168.1.2 | <input type="radio"/> Enable Server | <input checked="" type="radio"/> Disable Server |
| Subnet Mask | 255.255.255.0 | Start IP Address | <input type="text"/> |
| Default Gateway | <input type="text"/> | End IP Address | <input type="text"/> |
| | | Subnet Mask | <input type="text"/> |
| | | Default Gateway | <input type="text"/> |
| | | Lease Time | 86400 |
| | | Primary DNS Server | <input type="text"/> |
| | | Secondary DNS Server | <input type="text"/> |

3

- (1) Enter the IP Address and Subnet Mask.

Note: The IP address of AP902 can't be the same as it of Vigor2830n.

- (2) Disable the DHCP Server.
- (3) Click **OK**.

Configuring Settings for Universal Repeater Mode on AP902

1. Please go to **Wireless LAN >> Access Point Discovery**, and click **Scan**.

Wireless LAN (2.4GHz) >> Access Point Discovery

Access Point List

| Select SSID | BSSID | RSSI | Channel | Encryption | Authentication |
|-------------|-------|------|---------|------------|----------------|
|-------------|-------|------|---------|------------|----------------|


See [Channel Statistics](#)

Note: During the scanning process (about 5 seconds), no station is allowed to connect with the AP.


AP's MAC Address : : : : : AP's SSID

Select as **Universal Repeater**:

- Choose the SSID of Vigor2830n (which is “Draytek-2830” in this example), and click OK.

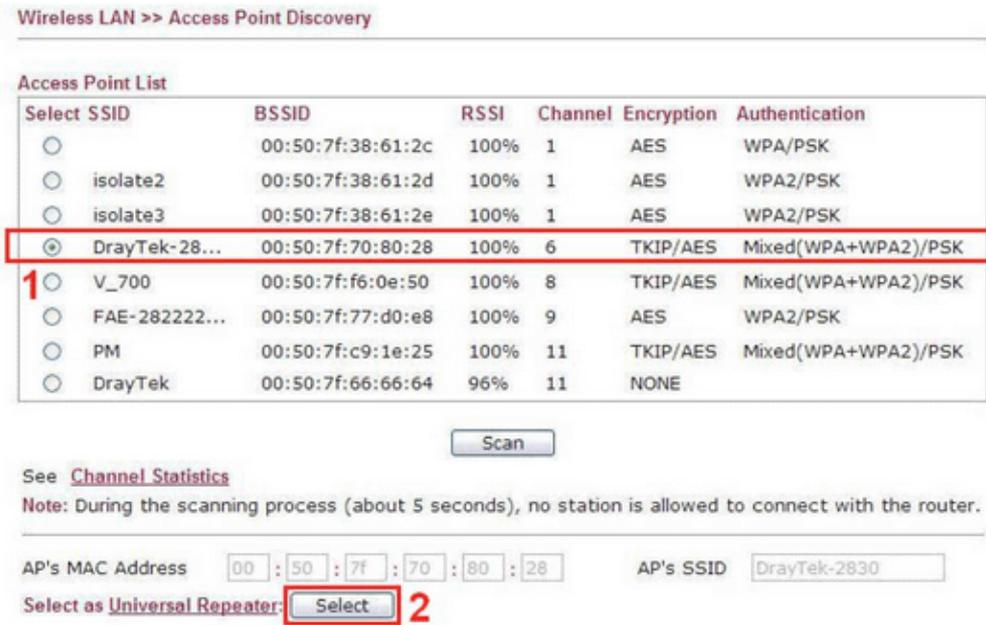


- A window will pop up. Please enter the security information of Vigor2830n in it, and click OK.

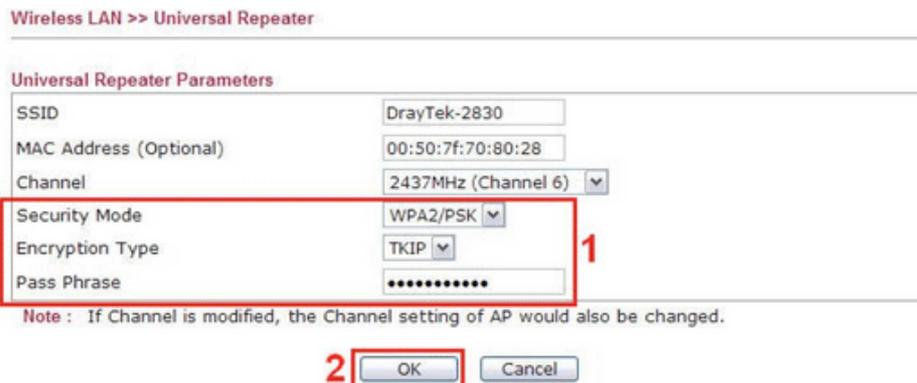

- Confirm the Universal Repeater connection is up.

We can launch the Command Prompt (cmd.exe) on a wireless client of AP902 to ping Vigor2830 to confirm the Universal Repeater connection has been established successfully.

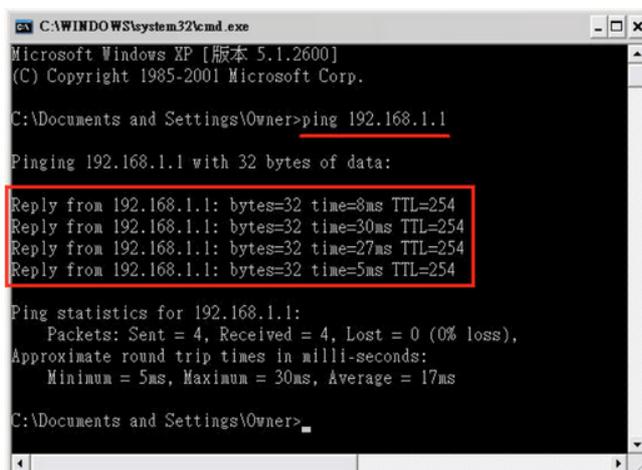


Setting Wireless LAN on AP902


1. Please go to **Wireless LAN >> General Setup**. Make SSID and Channel settings the same as configured for Vigor2830n.
2. Please go to **Wireless LAN >> Security Settings**. Make SSID and Channel settings the same as configured for Vigor2830n.

Using the Wireless Service of AP902


1. Choose the SSID of AP902.

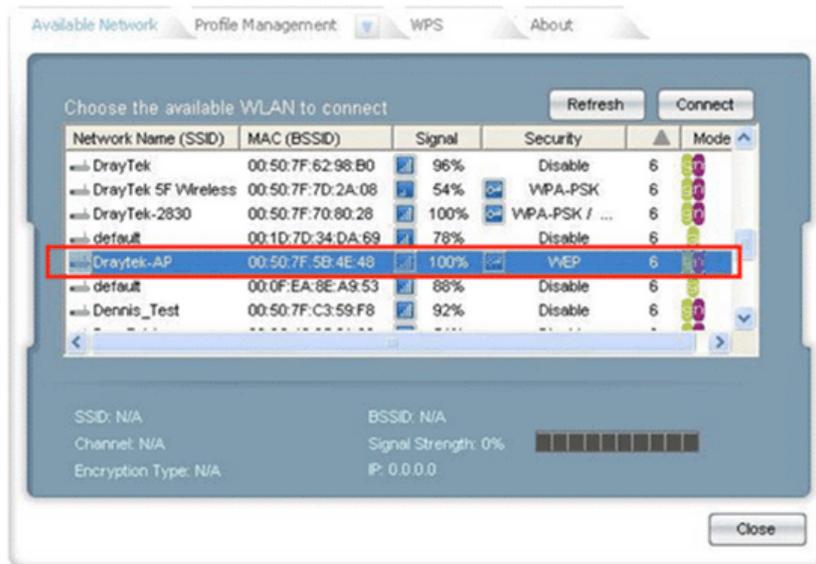


2. Enter the SSID key.

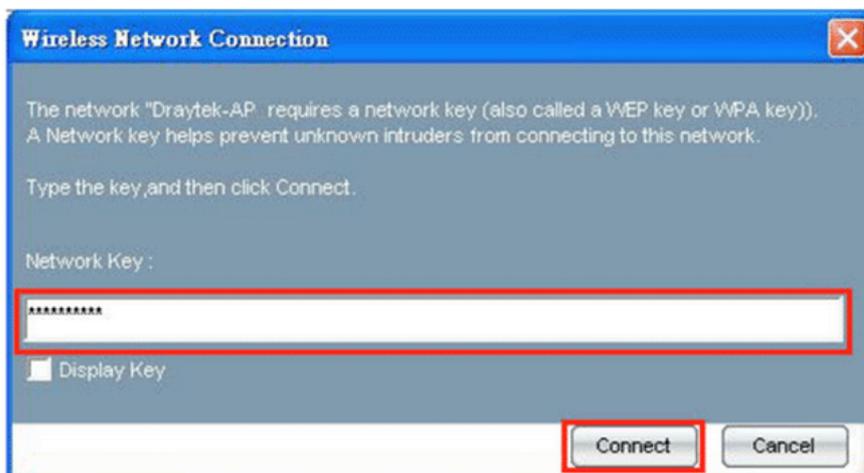

3. Confirm the IP address has been acquired.

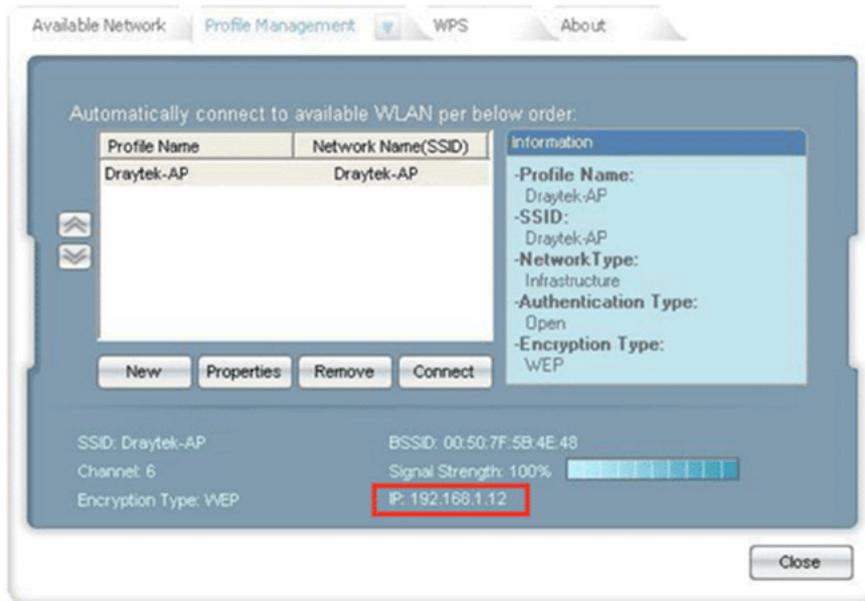

4. Confirm connection by ping.

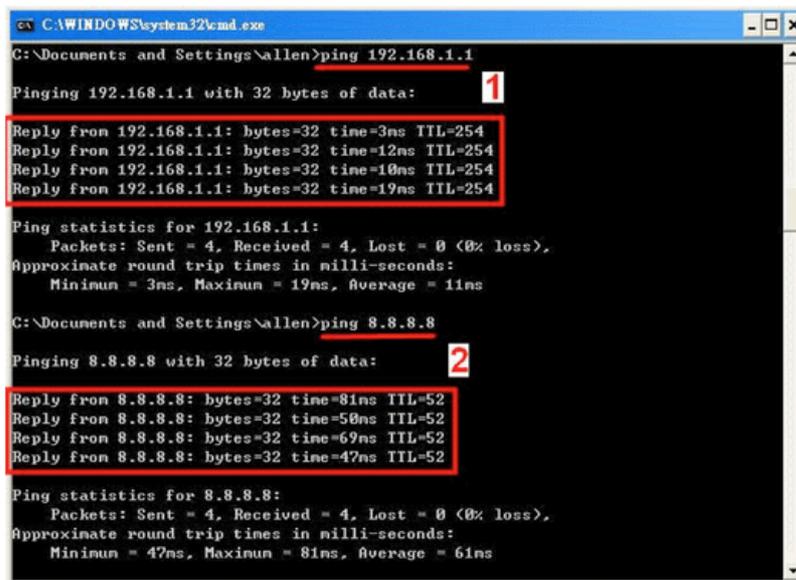

- (1) Test the connection to Vigor2830n.
- (2) Test the connection to Internet.

5

Trouble Shooting

This section will guide you to solve abnormal situations if you cannot access into the Internet after installing the modem and finishing the web configuration. Please follow sections below to check your basic installation status stage by stage.

- Checking if the hardware status is OK or not.
- Checking if the network connection settings on your computer are OK or not.
- Pinging the modem from your computer.
- Backing to factory default setting if necessary.

If all above stages are done and the modem still cannot run normally, it is the time for you to contact your dealer for advanced help.

5.1 Checking If the Hardware Status Is OK or Not

Follow the steps below to verify the hardware status.

1. Check the power line and cable connections.
Refer to “**1.3 Hardware Installation**” for details.
2. Power on the modem. Make sure the **POWER LED**, **ACT LED** and **LAN LED** are bright.
3. If not, it means that there is something wrong with the hardware status. Simply back to “**1.3 Hardware Installation**” to execute the hardware installation again. And then, try again.

5.2 Checking If the Network Connection Settings on Your Computer Is OK or Not

Sometimes the link failure occurs due to the wrong network connection settings. After trying the above section, if the link is still failed, please do the steps listed below to make sure the network connection settings is OK.

For Windows



The example is based on Windows 7 (Professional Edition). As to the examples for other operation systems, please refer to the similar steps or find support notes in www.draytek.com.


1. Open **All Programs>>Getting Started>>Control Panel**. Click **Network and Sharing Center**.




2. In the following window, click **Change adapter settings**.




3. Icons of network connection will be shown on the window. Right-click on **Local Area Connection** and click on **Properties**.

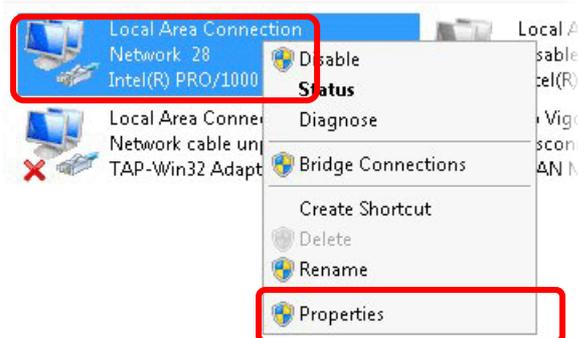

4. Select **Internet Protocol Version 4 (TCP/IP)** and then click **Properties**.

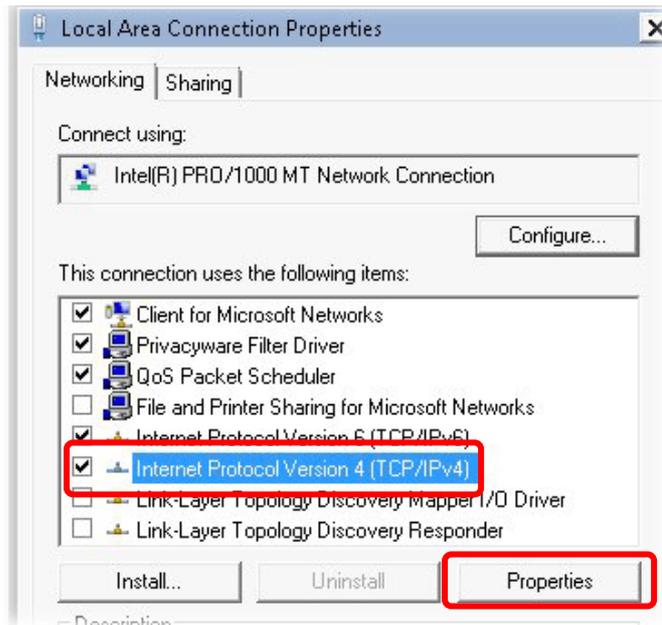


5. Select **Obtain an IP address automatically** and **Obtain DNS server address automatically**. Finally, click **OK**.

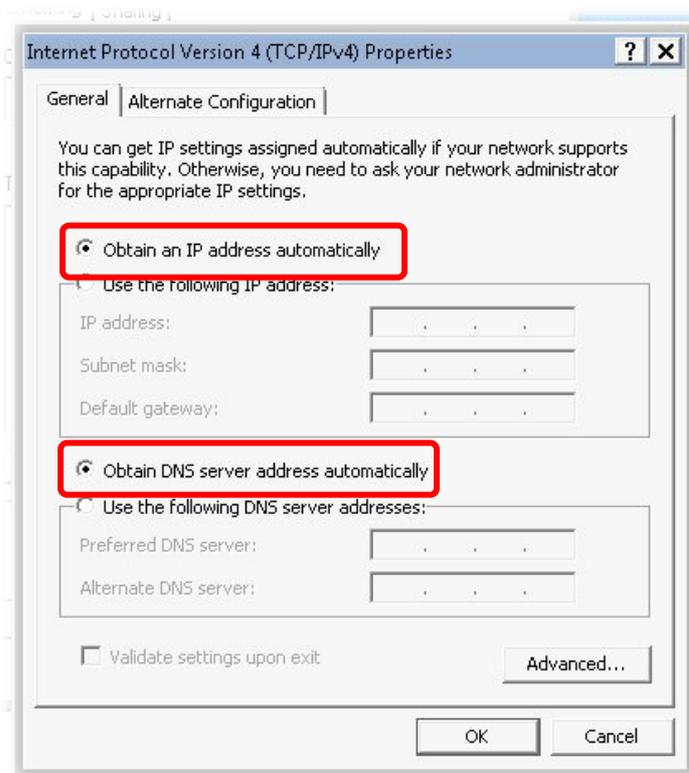

For Mac Os

1. Double click on the current used Mac Os on the desktop.
2. Open the **Application** folder and get into **Network**.
3. On the **Network** screen, select **Using DHCP** from the drop down list of Configure IPv4.

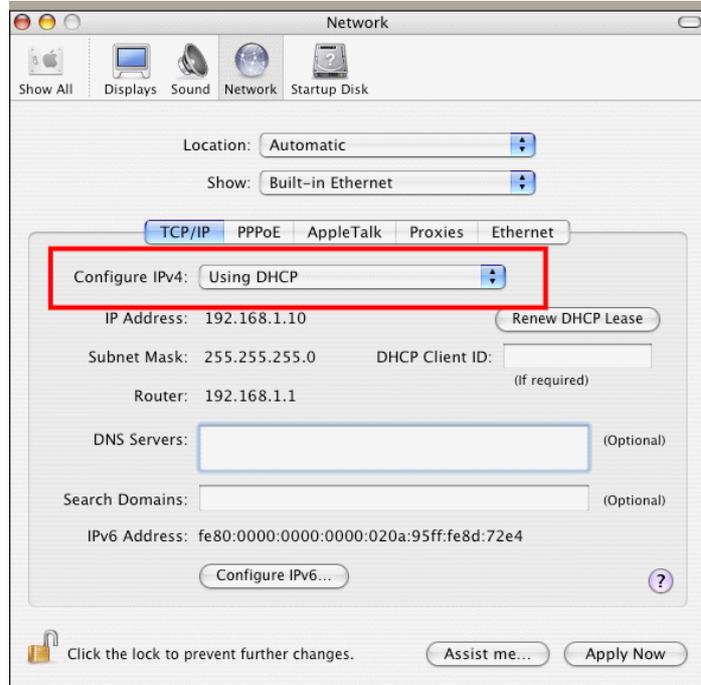


5.3 Pinging the Modem from Your Computer

The default gateway IP address of the modem is 192.168.1.2. For some reason, you might need to use “ping” command to check the link status of the modem. **The most important thing is that the computer will receive a reply from 192.168.1.2.** If not, please check the IP address of your computer. We suggest you setting the network connection as **get IP automatically**. (Please refer to the section 5.2)

Please follow the steps below to ping the modem correctly.

For Windows

1. Open the **Command Prompt** window (from **Start menu**> **Run**).
2. Type **command** (for Windows 95/98/ME) or **cmd** (for Windows NT/2000/XP/Vista/7). The DOS command dialog will appear.

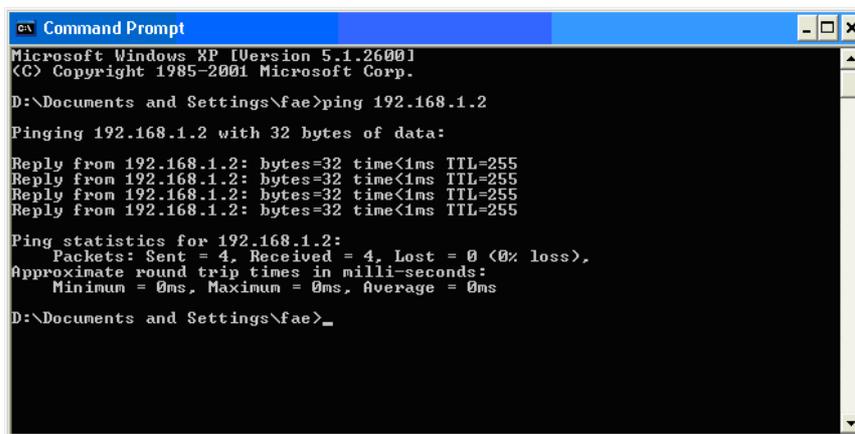

```
ex Command Prompt
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

D:\Documents and Settings\fae>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Reply from 192.168.1.2: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

D:\Documents and Settings\fae>_
```

3. Type ping 192.168.1.2 and press [Enter]. If the link is OK, the line of “**Reply from 192.168.1.2:bytes=32 time<1ms TTL=255**” will appear.
4. If the line does not appear, please check the IP address setting of your computer.

For Mac Os (Terminal)

1. Double click on the current used Mac Os on the desktop.
2. Open the **Application** folder and get into **Utilities**.
3. Double click **Terminal**. The Terminal window will appear.
4. Type **ping 192.168.1.2** and press [Enter]. If the link is OK, the line of “**64 bytes from 192.168.1.2: icmp_seq=0 ttl=255 time=xxxx ms**” will appear.

```
Terminal - bash - 80x24
Last login: Sat Jan  3 02:24:18 on ttys1
Welcome to Darwin!
Vigor10:~ draytek$ ping 192.168.1.1
PING 192.168.1.1 (192.168.1.1): 56 data bytes
64 bytes from 192.168.1.1: icmp_seq=0 ttl=255 time=0.755 ms
64 bytes from 192.168.1.1: icmp_seq=1 ttl=255 time=0.697 ms
64 bytes from 192.168.1.1: icmp_seq=2 ttl=255 time=0.716 ms
64 bytes from 192.168.1.1: icmp_seq=3 ttl=255 time=0.731 ms
64 bytes from 192.168.1.1: icmp_seq=4 ttl=255 time=0.72 ms
^C
--- 192.168.1.1 ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 0.697/0.723/0.755 ms
Vigor10:~ draytek$
```

5.4 Backing to Factory Default Setting If Necessary

Sometimes, a wrong connection can be improved by returning to the default settings. Try to reset the modem by software or hardware.



Warning: After pressing **factory default setting**, you will lose all settings you did before. Make sure you have recorded all useful settings before you pressing. The password of factory default is null.

Software Reset

You can reset the modem to factory default via Web page.

Go to **System Maintenance** and choose **Reboot System** on the web page. The following screen will appear. Choose **Using factory default configuration** and click **OK**. After few seconds, the modem will return all the settings to the factory settings.

System Maintenance >> Reboot System

Reboot System


Do You want to reboot your AP ?

- Using current configuration
- Using factory default configuration

OK

Hardware Reset

While the modem is running, press the **Factory Reset** button and hold for more than 5 seconds. When you see the **ACT** LED blinks rapidly, please release the button. Then, the modem will restart with the default configuration.

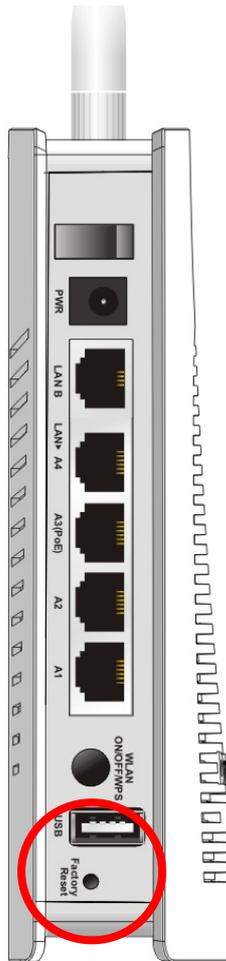

After restore the factory default setting, you can configure the settings for the modem again to fit your personal request.

5.5 Contacting DrayTek

If the modem still cannot work correctly after trying many efforts, please contact your dealer for further help right away. For any questions, please feel free to send e-mail to support@draytek.com.

This page is left blank.

Index

8

802.11 Ad Hoc, 74
802.11n, 47
802.1x, 49

A

Access Control, 51, 94, 121, 149, 169, 190
Action, 211
Activate MAC address filter, 94, 169
Administrator Password, 222
Advanced Configuration, 31
Advanced Setting, 53, 82, 96, 123, 151, 171, 192
AES, 22
Airtime Fairness, 60, 103, 132, 157, 177, 200
Antenna, 54, 83, 97, 124
AP, 32
AP Bridge-Point to Multi-Point, 32
AP Bridge-Point to Multi-Point Mode, 80
AP Bridge-Point to Point, 18, 32, 80
AP Bridge-WDS, 20, 25, 33
AP Bridge-WDS Mode, 87, 164
AP Discovery, 18, 26, 55, 84, 98, 125, 153, 172, 193
AP Management, 2, 39
AP Mode, 45, 144
AP Monitor Mode, 55, 84, 98, 125, 153, 172, 193
AP Operation Mode, 17, 24
APM Log, 40
Apple iOS Keep Alive, 212
Applications, 210, 242
Auth Mode, 52, 95, 170
Authentication Client, 208
Authentication Type, 207
Auto Adjustment, 59, 102, 131, 156, 176, 199
Auto Channel Filtered Out List, 54, 83, 97, 152, 172
Auto Provision, 39
AutoSelect, 17, 89, 127, 165, 185, 195

B

Backup, 208
Backup the Configuration, 223
Band Steering, 65, 108, 137
Bandwidth Limit, 17
Bandwidth Management, 59, 102, 131, 156, 176, 199
Black List, 41
Blocked MAC address filter, 94, 169
Browser Time, 226

C

CAM, 74
Central AP Management, 39
Certificate Management, 208
Changing Password, 15
Channel, 17, 21, 46, 81, 89, 116, 127, 145, 165, 185, 195
Channel Width, 53, 82, 96, 123, 151, 171, 192
Client IP, 208
Client PinCode, 52, 95, 170
Client's MAC Address, 41, 205
Configuration Backup, 223
Connection Time, 62, 134, 159, 202
Connection Type, 128, 196
Country Code, 54, 83, 97, 124, 151, 171, 192

D

Data Flow Monitor, 232
Daylight Saving, 226
Default Gateway, 129, 197
Detection, 216
Device Name, 128
DHCP Client, 34
DHCP server, 14
Diagnostics, 231
Download Limit, 59, 102, 131, 156, 176, 199

E

EAP Type, 207

Encryp Type, 52, 95, 170

End Time, 211

Extension Channel, 47, 81, 89, 117

F

Factory Default Setting, 259

Fast Roaming, 64, 107, 136, 161, 181, 204

Firmware Upgrade, 230

Force Overload Disassociation, 41

Fragment Length, 54, 83, 97, 124, 151, 171, 192

Fragment Threshold, 75

Function Support List, 40

G

Gateway, 34

General Setup, LAN, 33

Guest Wireless, 17

H

Hardware Installation, 5

Hardware Reset, 259

Hide SSID, 47, 89, 117, 145, 165, 185

HTMIX, 81

HTTP port, 228

HTTPS, 209

HTTPS port, 228

I

Infrastructure, 74

Interference Monitor, 237

IP Address, 34, 128, 196

Isolate LAN, 89, 117

Isolate Member, 47, 89, 117, 145, 165, 185

K

Keep Alive Period, 221

Key Renewal Interval, 49, 92, 119, 147, 167, 188

Key Size, 209

Key Type, 209

L

LAN, 33

LAN A, 3

LAN B, 3

LAN port, 36

Lease Time, 35

LED Indicators and Connectors, 3

LED Setup, 228

Limit Client, 46, 88, 116, 144, 164, 184

Limit Client per SSID, 46, 88, 116, 145, 165, 185

Load Balance, 41

M

MAC Address, 195

MAC Address Filter, 51

Mac Clone, 73

MAC Clone, 54, 83, 97, 117

Main Screen, 14, 31

Main SSID, 17

Management, 228

Management VLAN, 34

Mobile Device Management, 216

Mode, 46, 48, 72, 80, 88, 91, 116, 118, 145, 165, 166, 185, 187

N

Network Type, 74

NTP, 210

NTP Client, 226

NTP Server, 226

NTP synchronization, 226

O

Once, 211

Online Status, 29

OPEN, 75

Open/Shared, 21, 27, 128, 196

Operation Mode, 16, 32

Overload Management, 41

P

Packet-OVERDRIVE, 53, 73, 82, 96, 123

Pass Phrase, 49, 75, 92, 119, 128, 147, 167, 188, 196

Password, 15

Password Strength, 222

PBC Start, 78

Periodic Inform Settings, 221

Phy Mode, 20, 25

PHY Mode, 81, 90
PIN Code, 44
PMK Cache Period, 64, 107, 147, 161, 181, 204
PoE Connection, 8
Policy, 51, 94, 121, 149, 169, 217
Port, 50, 148
Port Control, 36, 37
Power Saving Mode, 74
Pre-Authentication, 64, 107, 147, 161, 181, 204
Primary DNS Server, 35
Primary IP Address, 221
PSK, 43
Push Button, 52, 95, 170

Q

Quick Start Wizard, 16

R

RADIUS Server, 49, 93, 120, 148, 168, 189, 207
RADIUS Setting, 207
Rate, 81, 90, 117
Rate Adaptation Algorithm, 54, 83, 97, 124, 151, 171, 192
Reboot System, 230
Reconnection Time, 62, 134, 159, 202
Relay Agent, 35
Renew PIN, 79
Restore, 52, 208
Restore Configuration, 224
Roaming, 63, 106, 135, 160, 180, 203
Router Name, 196
Routine, 211
RSSI, 63, 106, 135, 160, 180, 203
RTS Threshold, 54, 75, 83, 97, 124, 151, 171, 192

S

Scan, 77, 85
Schedule, 210
Secondary DNS Server, 35
Secondary IP Address, 221
Secret Key, 208
Security, 48, 81, 91, 118, 146, 166, 187
Security Key, 17
Security Mode, 75, 127, 195

Security Overview, 43
Security Settings, 48
Session Timeout, 50, 93, 120, 148, 168, 189
SHARED, 75
Shared Secret, 50, 93, 120, 148, 168, 189
Show Chart, 235
Simulate 2 APs, 47, 89, 117, 145, 185
Site Survey, 77
Software Reset, 259
Speed Test, 231
SSID, 89, 145, 165, 185
SSL(HTTPS), 221
Start Date, 211
Start PBC, 44, 79, 95, 122, 150, 170, 191
Start PIN, 79, 95, 122, 150, 170, 191
Start Time, 211
Station Airtime, 238
Station Control, 17, 62, 105, 134, 159, 179, 202
Station Link Speed, 240
Station List, 70, 113, 142, 162, 182, 205
Station Statistics, 235
Station Traffic Graph, 239
Station-Infrastructure, 32
Station-Infrastructure Mode, 72
Statistics, 78, 218
Status of Settings, 42
STUN, 221
Subject Name, 209
Subnet, 47, 89, 117, 145, 185
Subnet Mask, 34, 129, 197
Support Area, 240
Syslog/Mail Alert, 225
System Log, 231
System Maintenance, 218
System Status, 219

T

Telnet Server, 228
Temperature Calibration Offset, 214
Temperature High Alarm, 214
Temperature Low Alarm, 214
Temperature Sensor, 213
Temperature Sensor Graph, 215

Time and Date, 226
Time Zone, 226
TKIP, 22, 43
Total Download Limit, 59, 102, 131, 157, 176, 199
Total Upload Limit, 59, 102, 131, 157, 176, 199
TR-069, 220
Traffic Graph, 232
traffic overload, 41
Triggering Client Number, 61, 104, 178
Trouble Shooting, 254
Trust DHCP Server, 35
Tx Power, 54, 83, 97, 124, 151, 171, 192

U

Universal Repeater, 21, 26, 33, 127, 195
Universal Repeater Mode, 115, 184
Upload Limit, 59, 102, 131, 156, 176, 199
Users Profile, 207

V

VLAN ID, 34, 47, 89, 117, 145, 165, 185

W

WDS AP Status, 86, 99
WEP, 21, 76
WEP (Wired Equivalent Privacy), 43
White List, 41
Wi-Fi DOWN, 211
Wi-Fi Hardware Button, 228
Wi-Fi UP, 211
Wired Connection, 5, 6
Wireless Connection, 7
Wireless LAN (2.4GHz/5GHz), 43
Wireless LAN(2.4GHz), 32
Wireless LAN(5GHz), 33
WLAN (2.4GHz) Statistics, 233
WLAN (5GHz) Statistics, 234
WMM Configuration, 57, 100, 129, 155, 174, 197
WPA (Wi-Fi Protected Access), 43
WPA Algorithms, 49, 75, 92, 119, 147, 167, 188
WPS, 52, 78, 95, 122, 150, 170, 191
WPS (Wi-Fi Protected Setup), 43