

**DS-3WR3N**  
**300M Wireless Router**


DS-3WR3N is a wireless router designed by Hikvision. With IEEE802.11n wireless standard and the wireless speed up to 300 Mbps, it is perfect for such activities as email, chat, streaming videos and online gaming. DS-3WR3N can also be used as a client router to connect ISP network wirelessly or uplink AP to share the internet to every corner. Equipped with amplified antennas for extra coverage to eliminate dead zones.

- 5-dBi amplified antennas
- Dual antennas for maximum coverage

## ▪ Specification

General	
Product Dimension (W × H × D)	174.82 mm × 96.45 mm × 181.06 mm (6.88"× 3.80"× 7.13")
Package Dimension (W × H × D)	231 mm × 203 mm × 51 mm (9.09"× 7.99"× 2.01")
Net Weight	0.134 kg (0.295 lb)
Packing List	Wireless Router x 1, Ethernet cable x 1, Quick installation guide x 1
Packing Method	Single pack
Working Temperature	0 °C to 40 °C (32 °F to 104 °F )
Working Humidity	10% to 90% RH non-condensing
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F )
Storage Humidity	5% to 90% RH non-condensing
Installation Mode	Desktop installation
Max. Power Consumption	≤ 5.4 W
Gross Weight	0.634 kg (1.398 lb)
Wireless Parameter	
Data Rate	2.4 GHz: 300 Mbps
Wireless Standard	IEEE 802.11b/g/n @2.4 GHz
Working Frequency Band	2.4 GHz
Transmitting Power	18 dBm
Wireless Performance	Beamforming supported
Receiving Sensitivity	58 ± 2 dB@AC80 -MCS9 84 ± 2 dB@AC80 -MCS0
Antenna	2 high gain antennas
Hardware Parameter	
Network Interface	4 × RJ45, 10/100 Mbps auto-negotiation
LED Indicator	LED indicator
Reset	Reset button
Power Supply Method	9 VDC, 1 A power adapter power supply
Power Specifications	9 VDC, 1 A
Software Function	
Application function	Wireless Router Mode, Wireless Repeater Mode, Client + AP, WISP, and AP Mode supported DHCP Server supported Guest Network Configuration supported Signal Adjustment supported WiFi Schedule supported
Security Mode	WPA-PSK/WPA2-PSK, WPA/WPA2
Security Mechanism	Hide SSID
Management Method	Web
Upgrade	Web Update and Upgrade
System Log	System log
WAN Mode	DHCP,Static IP,PPPoE

## ▪ Typical Application

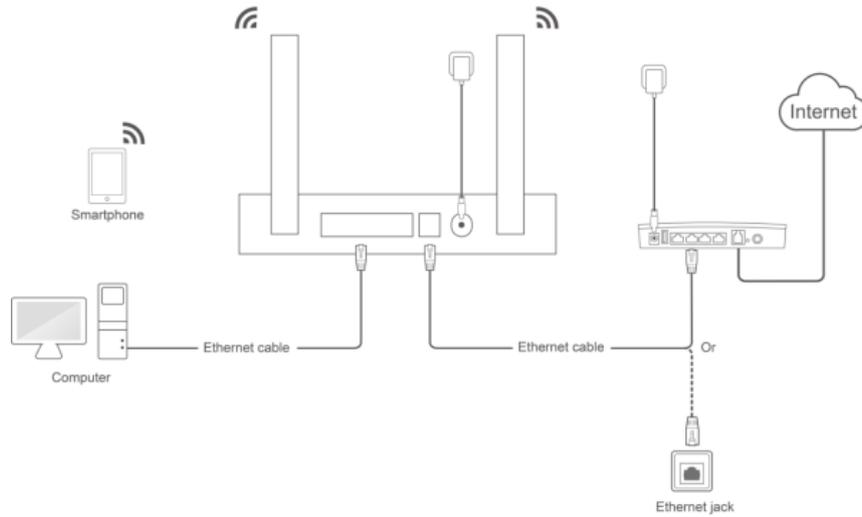

### ▪ Available Model

DS-3WR3N/US

DS-3WR3N/UK

DS-3WR3N

DS-3WR3N/IN

DS-3WR3N/ARGENTINA

DS-3WR3N/ID

DS-3WR3N/UK/Excel

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

