

**DS-3WR12C(海外标配)/欧标  
AC1200 Wireless Router**

DS-3WR12C is a dual band Wi-Fi router designed by Hikvision. You can easily deploy, monitor and expand your home Wi-Fi network anytime and anywhere. DS-3WR12C comes equipped with dual band coverage, which can offer a smooth online game and 4K video experience. Powered with beamforming technology, DS-3WR12C ensures excellent high-speed Wi-Fi coverage in every corner at home.


- Four 5-dBi amplified antennas
- Beamforming optimizes signal
- Dual band – Smart signal switching
- Broadband account synchronization

## ▪ Specification


General	
Product Dimension (W × H × D)	248.40 mm × 154.80 mm × 213.34 mm (9.78"× 6.09"× 8.40")
Package Dimension (W × H × D)	306 mm × 290 mm × 59 mm (12.05"× 11.42"× 2.32")
Net Weight	0.222 kg (0.489 lb)
Packing List	Wireless Router x 1, Ethernet cable x 1, Quick installation guide x 1
Packing Method	Single pack
Working Temperature	0 °C to 40 °C (32 °F to 104 °F )
Working Humidity	10% to 90% RH non-condensing
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F )
Storage Humidity	5% to 90% RH non-condensing
Installation Mode	Desktop installation
Max. Power Consumption	≤ 9 W
Gross Weight	0.722 kg (1.592 lb)
Wireless Parameter	
Data Rate	≤ 1167 Mbps 2.4 GHz: 300 Mbps 5 GHz: 867 Mbps
Wireless Standard	IEEE 802.11/a/n/ac wave 2 @5GHz, IEEE 802.11b/g/n @2.4GHz
Working Frequency Band	2.4 GHz , 5 GHz
Transmitting Power	CE: <20 dBm(2.4G) <23 dBm(5G)
Wireless Performance	4 × 4 MU-MIMO supported Beamforming supported
Receiving Sensitivity	58 ± 2 dB@AC80 -MCS9 84 ± 2 dB@AC80 -MCS0
Antenna	4 high gain antennas
Operating Frequency	2.4 GHz: US/2412-2472 MHz(CH1-CH13) 5 GHz: US/5180-5240 MHz(CH36-CH48) 5 GHz: US/5740-5805 MHz(CH149-CH161)
EIRP Power(Max.)	2.4 GHz: 19.86 dBm 5 GHz: 22.96 dBm
Hardware Parameter	
Network Interface	1*10/100Mbps WAN port 3*10/100Mbps LAN ports
LED Indicator	LED indicator
Reset	Reset button
Power Supply Method	9 VDC, 1 A power adapter power supply
Power Specifications	9 VDC, 1 A
Software Function	
Application function	Wireless Router Mode, Wireless Repeater Mode, Client + AP, WISP, and AP Mode supported DHCP Server supported Guest Network Configuration supported Signal Adjustment supported WiFi Schedule supported

Security Mode	WPA-PSK, WPA2-PSK, WPA and WPA2 supported
Security Mechanism	Hide SSID
Management Method	Web
Upgrade	Web Update and Upgrade
System Log	System log
WAN Mode	DHCP,Static IP,PPPoE

## ▪ Typical Application

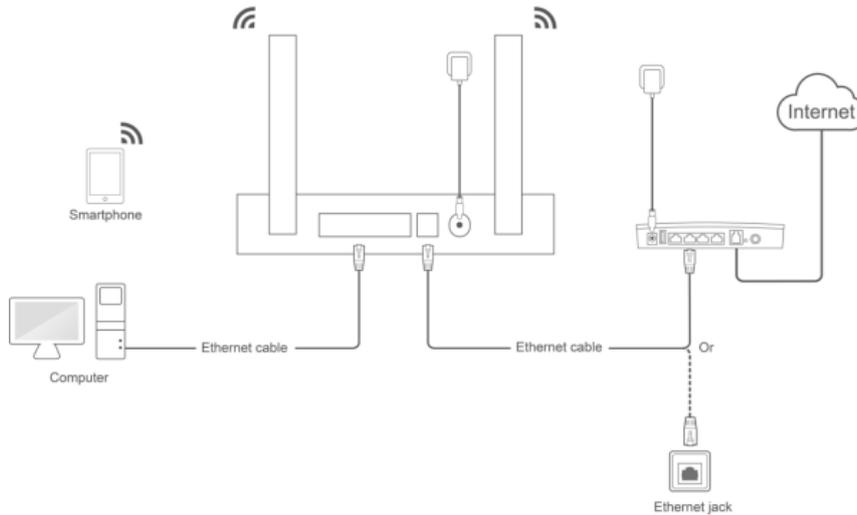


## ▪ Physical Interface

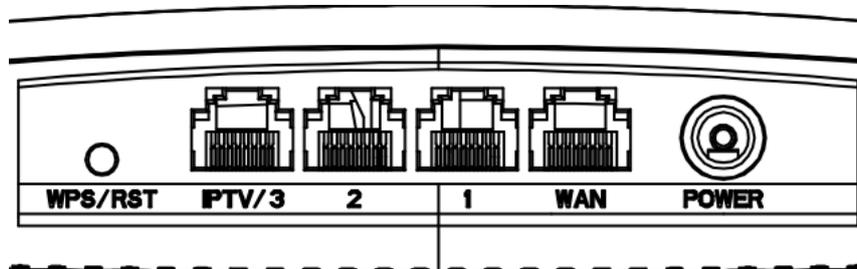

## ▪ Available Model

DS-3WR12C

## ▪ Dimension

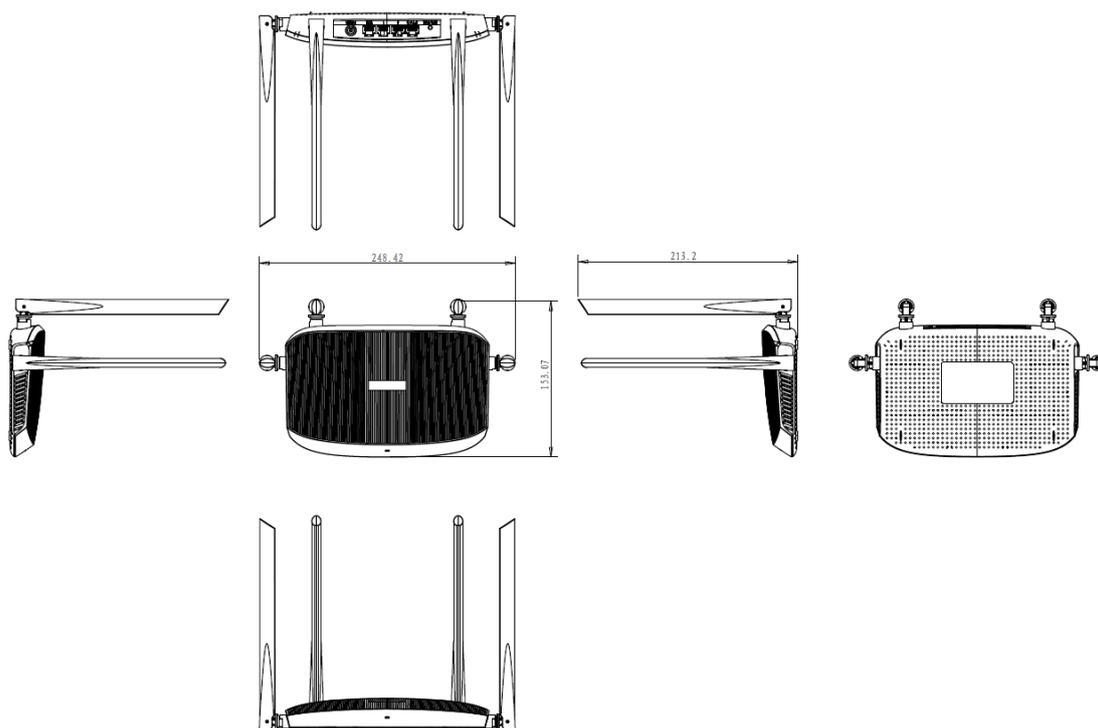

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

