

DS-3WR15X
1500M Wi-Fi 6 Wireless Router



- 1500Mbps Wi-Fi 6
- Wired Wireless Dual Gigabit
- Dual Band in One and 5G First
- APP Management

规格参数

无线参数	
无线标准	IEEE 802.11a/n/ac/ax @5GHz IEEE 802.11b/g/n @2.4GHz
工作频段	2.4 GHz , 5 GHz
发射功率	CE: < 20dBm(2.4GHz) < 23dBm(5GHz)
接收灵敏度	5GHz: -89dBm@HE80-MCS0 -60dBm@HE80-MCS11 2.4GHz: -93dBm@HT40-MCS0 -73dBm@HT40-MCS7
天线	4 high gain antennas
无线范围	Up to 1300 ft ² /120 m ²
最大接入数	128
推荐接入数	50
无线特性	Dual Band Supported MU-MIMO supported Beamforming supported OFDMA supported
天线增益	5dbi
最大传输速率	≤ 1500 Mbps 5GHz: 1201Mbps 2.4GHz: 300Mbps
硬件功能	
网口	1 × 10/100/1000 Mbps Adaptive WAN Port 3 × 10/100/1000 Mbps Adaptive LAN Ports
LED指示灯	Red/blue for different working states, flashing mode
供电方式	Power Supply Adapter
电源规格	DC 12 V, 1 A
按键	Reset button, WPS Button
运行内存	128MB DDR2
机身内存	128MB NAND
整机最大功耗	≤10 W
软件功能	
安全模式	WPA2-PSK,WPA/WPA2-PSKs supported
DHCP	DHCP Client List DHCP Server
安全机制	Support fast and secure WPS connection Support hiding wireless network name Support controlling terminal network connection Support firewalls Login Authentication
管理方式	Web Control: PC, mobile App Control: HPP, HC TR069(TR098/TR181)
软件升级	Web Upgrade App Cloud Upgrade Auto Upgrade
系统日志	System Log
工作模式	Router Mode Wireless Extender Mode Access Point Mode

WAN模式	DHCP Static IP PPPOE
IP版本	IPv4 IPv6
家长管理	Speed Limit Internet Access Period Filter URL Parental Control Custom Profiles
防火墙	Forbid UDP flood attack Forbid TCP SYNC flood attack Forbid ICMP flood attack
DDNS	Oray
VPN	PPTP Client L2TP Client
NAT转发	Port Mapping DMZ UPnP
其他特性	VLAN/IPTV,WAN Self-Adaption,Quick Diagnosis,WIFI Optimization
MESH	Hikvision Mesh
通用参数	
产品尺寸 (宽×高×深)	241.3 mm × 140.8 mm × 156.3mm
包装尺寸 (宽×高×深)	320mm × 265mm × 55mm
净重	0.245 kg
装箱清单	1500Mbps Wi-Fi6 Router × 1 Power Supply Adaptor × 1 CAT5e Network Cable × 1 Quick Start Guide × 1 Regulatory Compliance and Safety Information × 1
装箱形式	Single pack
工作温度	0 °C to 40 °C (32 °F to 104 °F)
工作湿度	10% to 90% RH non-condensing
存储温度	-40 °C to 70 °C (-40 °F to 158 °F)
存储湿度	5% to 95% RH non-condensing
安装方式	Desk-Mounted,Wall-Mounted
毛重	0.790 kg

▪ 典型应用

▪ 订货型号

DS-3WR15X




DS-3WR15X/英标

DS-3WR15X/印标

DS-3WR15X/阿根廷标

DS-3WR15X/FASTEGY/DS-3WR15X/EG

▪ 外形尺寸

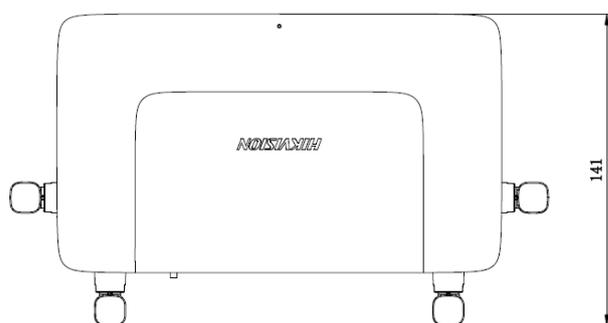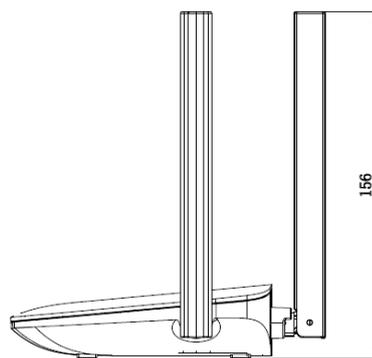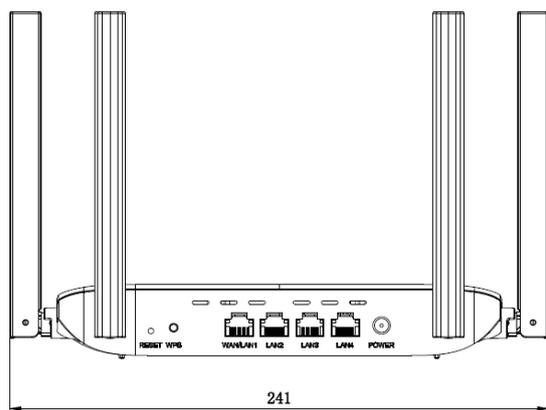

见远行更远

See Far, Go Further



online小程序



国内公众号



服务公众号



企业微信

杭州海康威视数字技术股份有限公司
HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO., LTD.

海康威视官网 <https://www.hikvision.com/cn/>
海康威视合作伙伴平台 <https://partners.hikvision.com/>
服务热线 400-800-5998 (7*24小时)

©杭州海康威视数字技术股份有限公司。除非另有约定，我们不对本手册提供任何明示或默示的声明或保证。我们保留修改的权利，恕不另行通知。